

GENERAL ARCHITECTURAL NOTES

- UNLESS OTHERWISE INDICATED, PLAN DIMENSIONS ARE TO COLUMN GRID ON CENTERLINES, NOMINAL SURFACE OF MASONRY, FACE OF STUDS AND FACE OF CONCRETE WALLS.
- "FLOOR LINE" REFERS TO TOP OF CONCRETE SLABS. FINISH FLOORING IS INSTALLED ABOVE THE FLOOR LINE. FOR DEPRESSED FLOORS AND CURBS, SEE STRUCTURAL DRAWINGS.
- REPETITIVE FEATURES ARE NOT DRAWN IN THEIR ENTIRETY AND SHALL BE COMPLETELY PROVIDED AS IF DRAWN IN FULL.
- WHERE DOOR IS LOCATED NEAR CORNER OF ROOM AND IS NOT LOCATED BY DIMENSION ON PLAN OR DETAILS, DIMENSION SHALL BE 3-INCHES FROM FACE OF STUD (WALL) TO FACE OF ROUGH OPENING. DIMENSION SHALL BE 6" FROM FACE OF WALL TO EDGE OF ROUGH OPENING AT CONCRETE WALLS, 8" AT CMU WALLS.
- AT WALLS WITH SOUND ATTENUATION BLANKETS, SEAL DOOR FRAMES, GLAZED OPENING FRAMES, INTERSECTIONS, AND OTHER PENETRATIONS WITH ACOUSTICAL SEALANT.
- LINE OF GRADES, AS SHOWN ON THE BUILDING ELEVATIONS AND SECTIONS ARE APPROXIMATE. THEY ARE AT THE BUILDING FACE, OR ON THE SECTION END EXCEPT AS NOTED.
- VERIFY ALL ROUGH-IN DIMENSIONS FOR EQUIPMENT PROVIDED IN THIS CONTRACT, OR BY OTHERS.
- REFER TO ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER CATEGORIES OR DRAWINGS FOR ADDITIONAL NOTES.
- VERIFY SIZE AND LOCATION OF, AND PROVIDE: REQUIRED OPENINGS THROUGH FLOORS AND WALLS, ACCESS DOORS, FURRING, CURBS, ANCHORS AND INSERTS. PROVIDE ALL BASES AND BLOCKING REQUIRED FOR ACCESSORIES, MECHANICAL, ELECTRICAL AND OTHER EQUIPMENT.

ARCH/STRUCT MATERIAL SYMBOLS

SYMBOL	LEGEND
	GRATING, SPAN DIRECTION INDICATED
	CHECKERED PLATE
	GROUT
	GRANULAR FILL
	EARTH OR FINISH GRADE
	CONCRETE
	CMU WALL (PLAN)
	CMU WALL (SECTION)
	MASONRY WALL
	METAL STUD WALL (PLAN)
	WOOD STUD WALL (PLAN)
	RIGID INSULATION
	BATT INSULATION
	STEEL
	ALUMINUM
	PLYWOOD
	GYPSUM WALLBOARD
	ACOUSTICAL TILE
	WOOD, ROUGH CONTINUOUS
	WOOD, ROUGH NON-CONTINUOUS
	WOOD, FINISHED


ARCHITECTURAL/STRUCTURAL LEGEND

SYMBOL	LEGEND
	REFERENCE GRID INDICATOR
	ROOM IDENTIFIER
	DOOR IDENTIFIER
	WINDOW IDENTIFIER
	RELIGHT IDENTIFIER
	LOUVER IDENTIFIER
	WALL TYPE INDICATOR
	EXTERIOR ELEVATION INDICATOR
	INTERIOR ELEVATION INDICATOR
	DETAIL INDICATOR - SMALL CONDITION
	SPOT ELEVATION INDICATOR
	DIRECTION OF SLOPE DOWN
	DOOR/HATCH SWING INDICATOR
	INDICATES PAIR OF DOORS
	RECESSED EXTINGUISHER CABINET FIRE EXTINGUISHER "X" = NUMBER IN SPECIFICATIONS
	CONTROL JOINT
	EXPANSION JOINT
	RAILINGS
	POST

WALL TYPES

NOTES:

- DENOTES LOCATION OF WALL TYPE INDICATOR ON PLANS.
- WHERE MORE THAN ONE WALL TYPE IS INDICATED FOR A SINGLE LOCATION ON PLANS, CONSTRUCTION VARIES IN THE HEIGHT OF THE WALL. WALL TYPES ARE SHOWN IN THE ORDER IN WHICH THEY OCCUR, WITH THE LOWEST LOCATED NEAREST THE WALL.
- SEE SCHEDULES AND DRAWINGS FOR INTERIOR AND EXTERIOR WALL FINISHES.

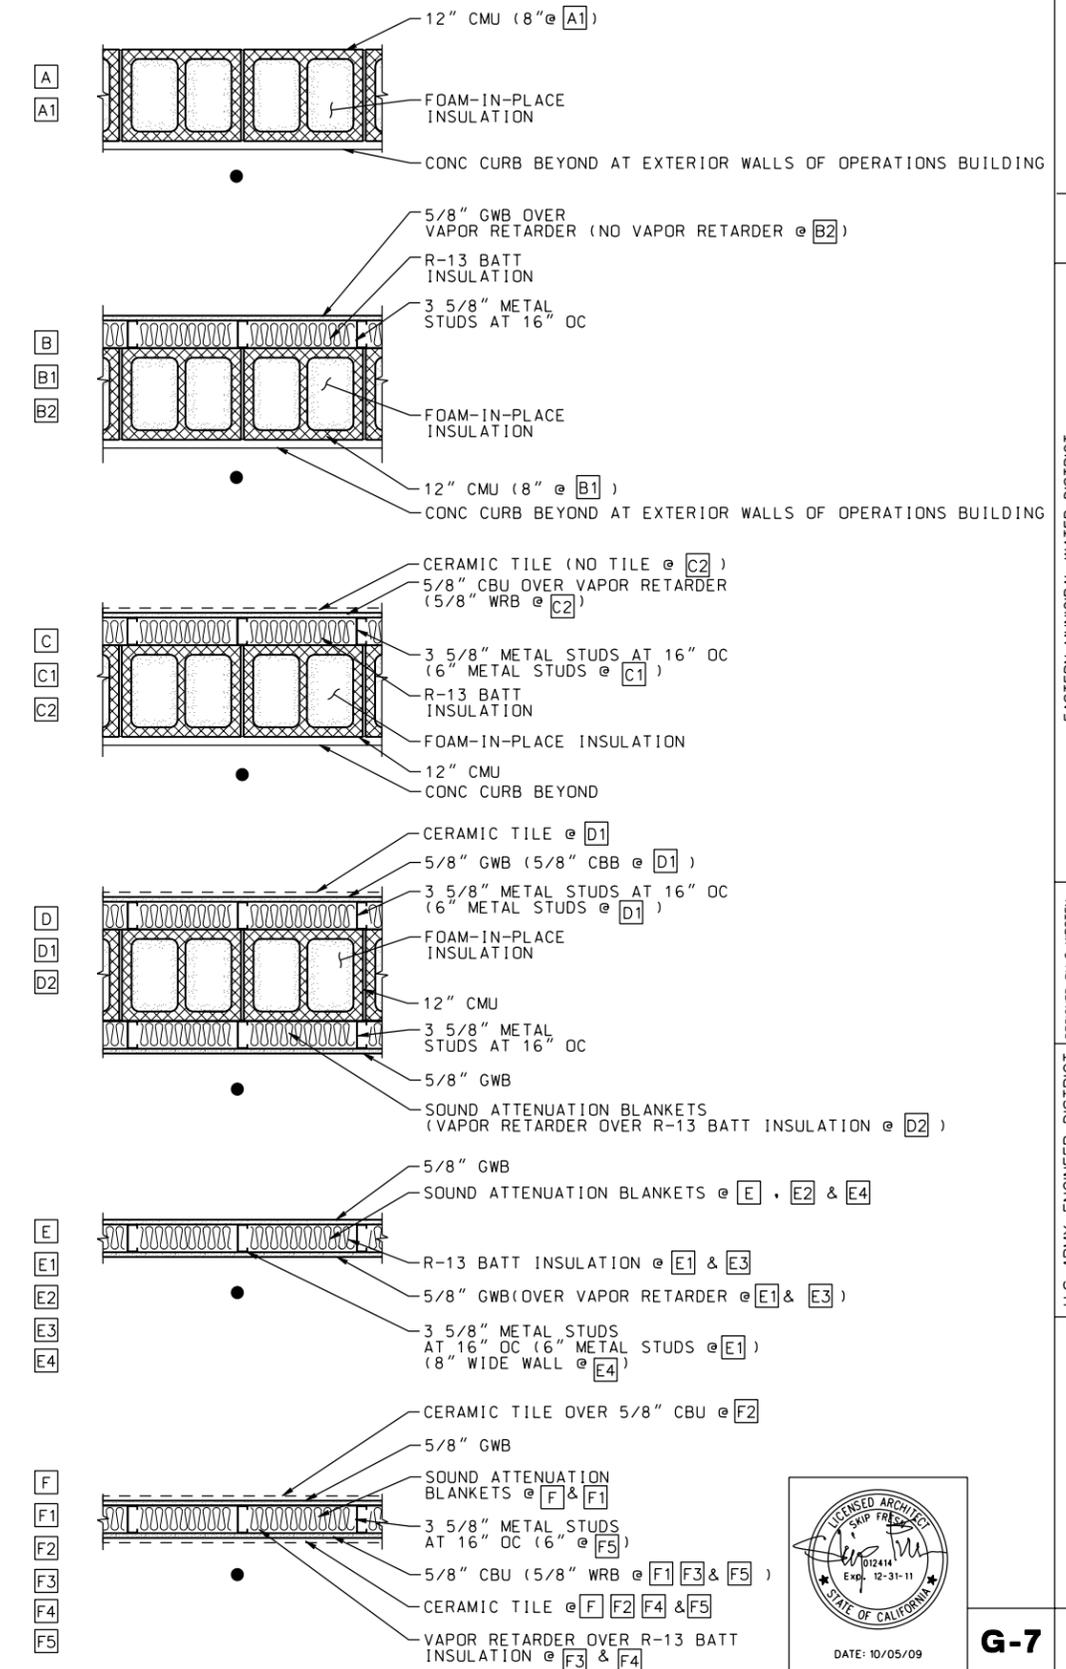

PLOT DATE: 2/19/2010 PLOT TIME: 10:52:13 AM

NDM-SCO-EMWD USACE PERRIS II PDFg007d.dgn

EASTERN MUNICIPAL WATER DISTRICT
PERRIS II DESALINATION FACILITY
PERRIS, CALIFORNIA

DESIGNED BY: G. KRISTEN
DRAWN BY: A. VARGAS
CHECKED BY: S. FRESH

U.S. ARMY ENGINEER DISTRICT
LOS ANGELES
CORPS OF ENGINEERS

ART. JUNG, P.E.
CHIEF, DESIGN BRANCH


SHEET
7 OF 226
SHEETS

REVISIONS
SYMBOL
DATE
APPROVAL

ARCHITECTURAL NOTES, LEGEND,
AND WALL TYPES

CADD FILE NAME: PDFg007d.dgn

SPEC. NO.: NOT APPLICABLE
L.A. DISTRICT FILE NO. XXX-XXXX



DATE: 10/05/09