




RAIL SPLICE DETAIL

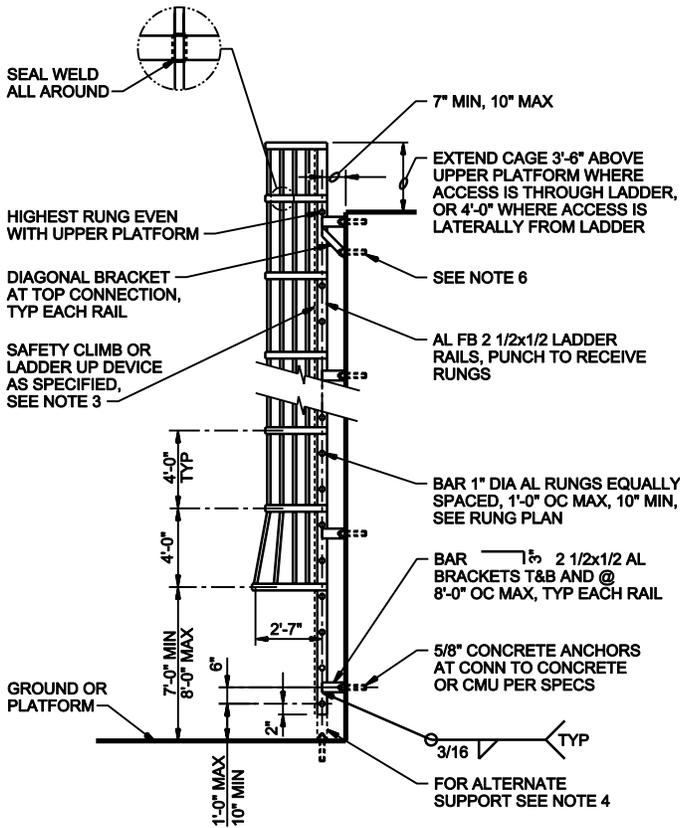

LADDER WITH SAFETY CAGE

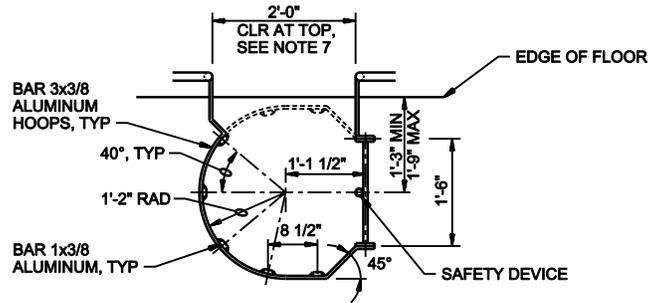

ACCESS Laterally FROM LADDER PLAN

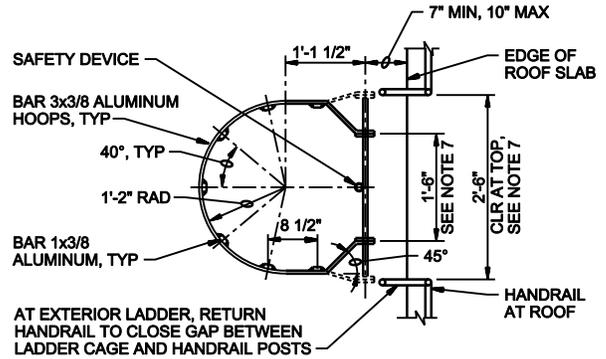

ACCESS Through LADDER PLAN

LADDER AND SAFETY CAGE DETAILS

NOTES:

1. PROVIDE PROTECTION FOR ALUMINUM IN CONTACT WITH CONCRETE AS SPECIFIED.
2. SUBMIT COORDINATED SHOP DRAWINGS.
3. PROVIDE SAFETY CLIMB DEVICE FOR LADDERS 20' OR GREATER.
4. FOR INTERIOR, DRY AREAS, EXTEND RAILS AND BEND 3" AT FLOOR. SECURE WITH 5/8" CONCRETE ANCHORS.
5. PROVIDE SEAL WELDS AT ALL CONTACT SURFACES WHERE STRUCTURAL WELDS ARE NOT REQUIRED OR SHOWN.
6. PROVIDE 3/4" DIA CONC ANCHORS WITH 5 1/2" MINIMUM EMBED AT DIAGONAL BRACKET WALL CONNECTIONS.
7. WIDEN CAGE FROM 1'-6" TO DIMENSION SHOWN AT TOP TO ACCESS SAFETY CLIMB RAIL.

LADDER WITH SAFETY CAGE - ALUMINUM

NTS

DETAIL 2 OF 2

0551-101