


A	B	C
5'	2"*	0.29' (3 1/2")
6'	2'	0.29' (3 1/2")
7'	3'	0.19' (2 1/4")
8'	4'	0.08' (1")
9'	5'	0.00' (0")

\*SEE NOTE 6

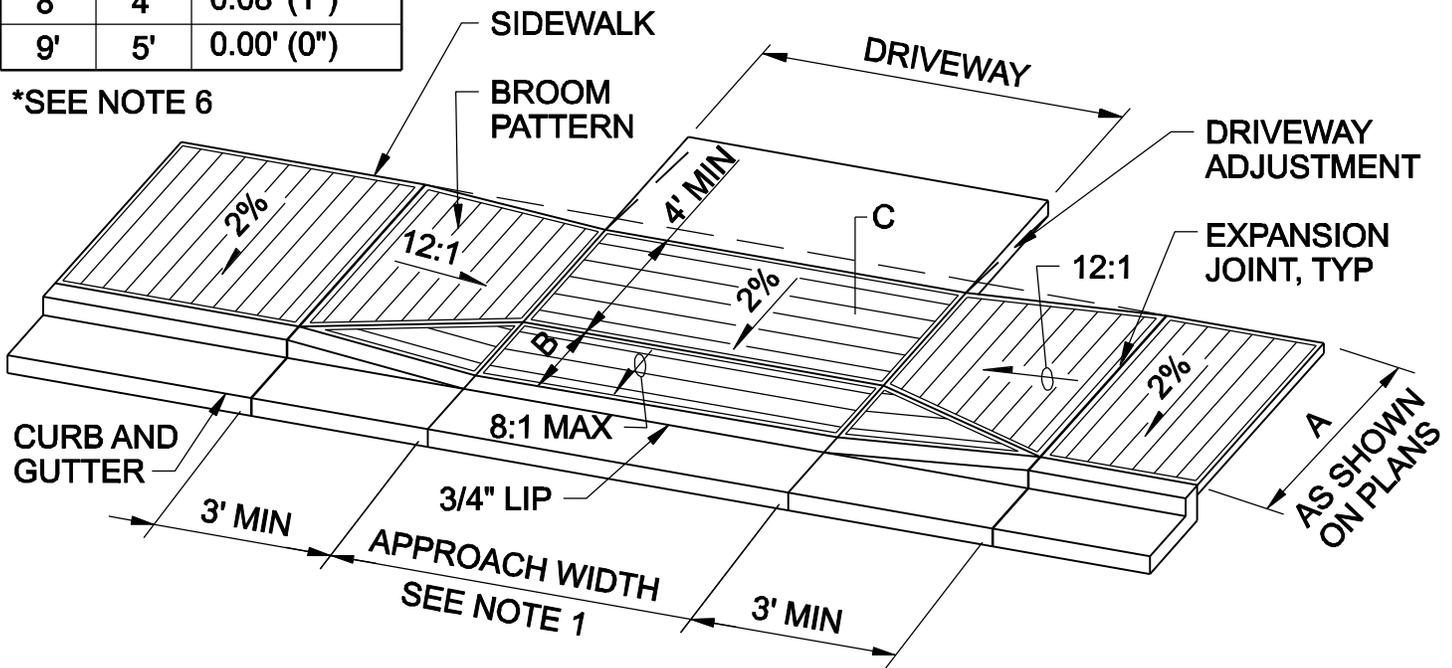

**NOTES:**

1. APPROACH WIDTH SHALL BE AS SHOWN ON THE PLANS. WHERE IT IS NOT SPECIFIED, THE WIDTH SHALL BE 12 FEET MINIMUM OR AS DIRECTED BY THE ENGINEER.
2. ALL CONCRETE SHALL BE PLACED ON 4" THICK BASE COURSE, UNLESS SHOWN OTHERWISE.
3. ADD CONTRACTION OR COLD JOINT IN CENTER OF APPROACH AND CURB AND GUTTER WHEN APPROACH WIDTH EXCEEDS 20 FEET.
4. APPROACH AND SIDEWALK THICKNESS BETWEEN GUTTER AND DRIVEWAY SHALL BE 6" MINIMUM, UNLESS SHOWN OTHERWISE.
5. THE 2% CROSS-SLOPE OF SIDEWALK IS MEASURED FROM HORIZONTAL. THE 12:1 SLOPE OF SIDEWALK TRANSITION TO DRIVEWAY IS RELATIVE TO THE RUNNING SLOPE OF THE SIDEWALK. THE SLOPE OF THE APPROACH IS MEASURED RELATIVE TO HORIZONTAL.
6. TRANSITION BACK OF WALKWAY 1' INTO DRIVEWAY TO MAINTAIN 4' MINIMUM WIDTH.

**DRIVEWAY APPROACH-CURBSIDE SIDEWALK**

NTS