Appendix E: California's Ground Water Bulletin 118

Sacramento River Hydrologic Region

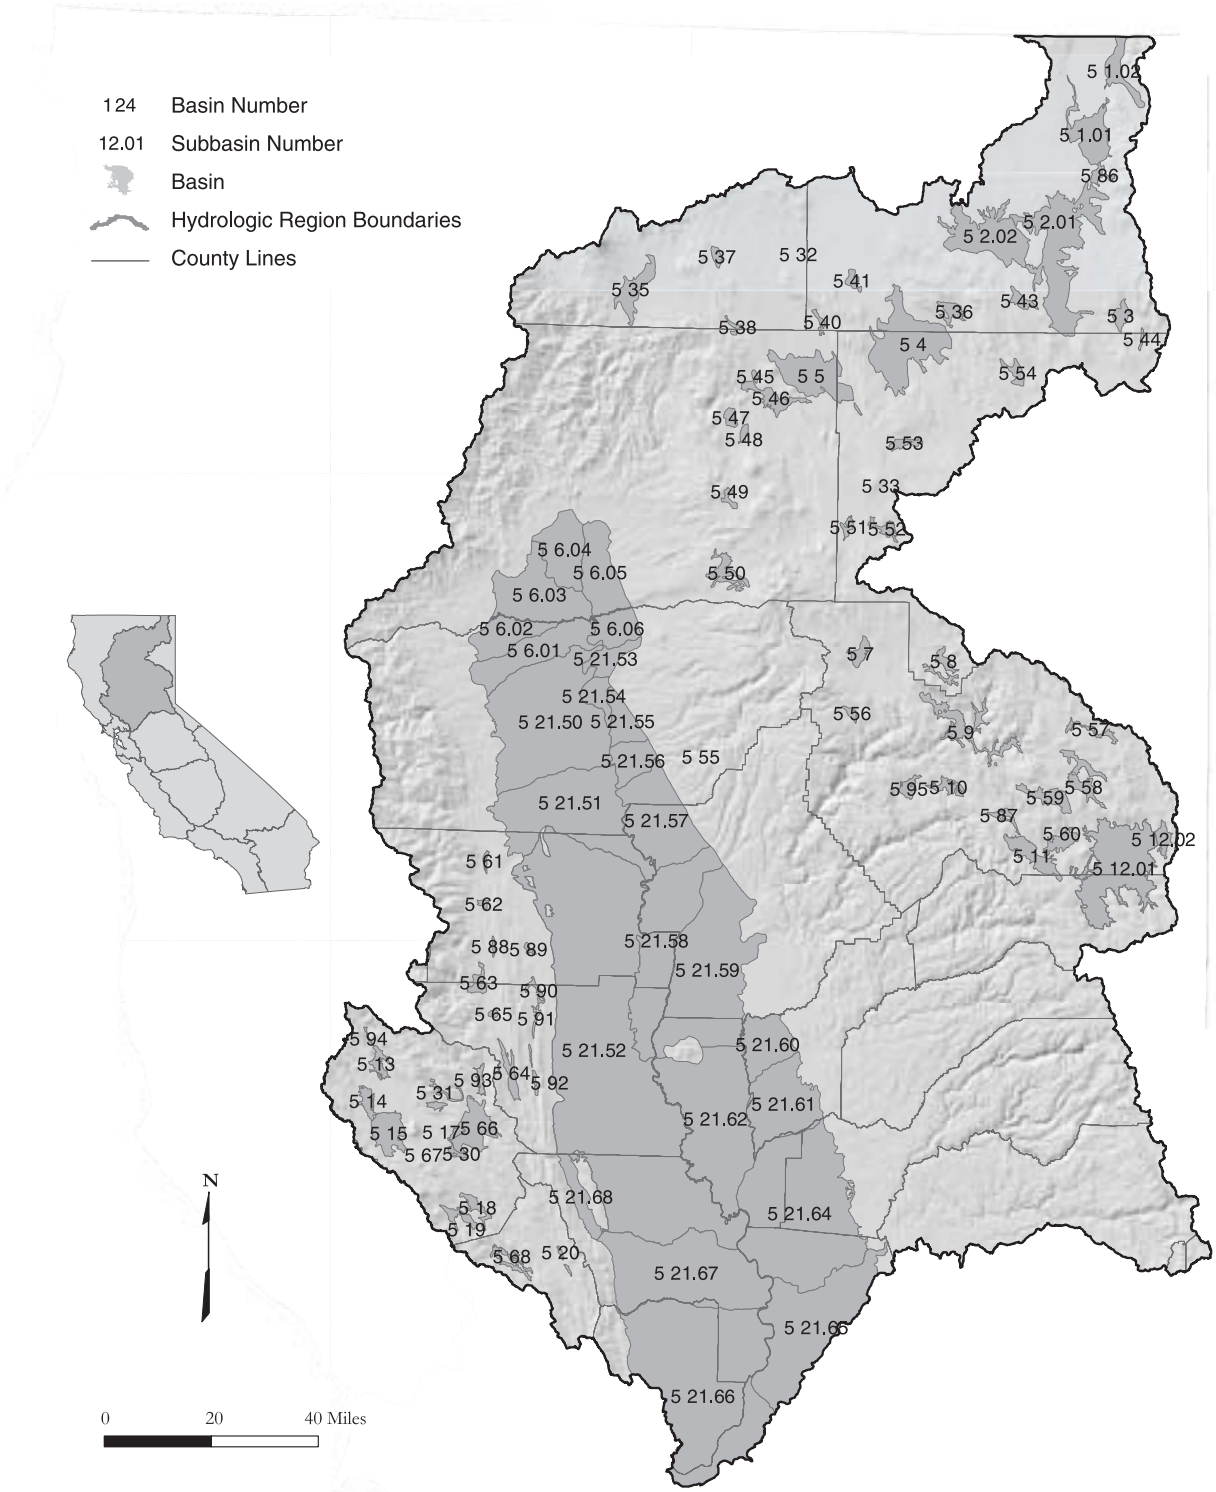

Figure 33 Sacramento River Hydrologic Region

Basins and Subbasins of the Sacramento River Hydrologic Region

Basin/subbasins	Basin name
5-1	Goose Lake Valley
5-1.01	Lower Goose Lake Valley
5-1.02	Fandango Valley
5-2	Alturas Area
5-2.01	South Fork Pitt River
5-2.02	Warm Springs Valley
5-3	Jess Valley
5-4	Big Valley
5-5	Fall River Valley
5-6	Redding Area
5-6.01	Bowman
5-6.02	Rosewood
5-6.03	Anderson
5-6.04	Enterprise
5-6.05	Millville
5-6.06	South Battle Creek
5-7	Lake Almanor Valley
5-8	Mountain Meadows Valley
5-9	Indian Valley
5-10	American Valley
5-11	Mohawk Valley
5-12	Sierra Valley
5-12.01	Sierra Valley
5-12.02	Chilcoot
5-13	Upper Lake Valley
5-14	Scotts Valley
5-15	Big Valley
5-16	High Valley
5-17	Burns Valley
5-18	Coyote Valley
5-19	Collayomi Valley
5-20	Berryessa Valley
5-21	Sacramento Valley
5-21.50	Red Bluff
5-21.51	Corning
5-21.52	Colusa
5-21.53	Bend
5-21.54	Antelope
5-21.55	Dye Creek
5-21.56	Los Molinos
5-21.57	Vina
5-21.58	West Butte
5-21.59	East Butte
5-21.60	North Yuba
5-21.61	South Yuba
5-21.62	Sutter
5-21.64	North American
5-21.65	South American
5-21.66	Solano
5-21.67	Yolo
5-21.68	Capay Valley

Basin/subbasins	Basin name
5-30	Lower Lake Valley
5-31	Long Valley
5-35	Mccloud Area
5-36	Round Valley
5-37	Toad Well Area
5-38	Pondosa Town Area
5-40	Hot Springs Valley
5-41	Egg Lake Valley
5-43	Rock Prairie Valley
5-44	Long Valley
5-45	Cayton Valley
5-46	Lake Britton Area
5-47	Goose Valley
5-48	Burney Creek Valley
5-49	Dry Burney Creek Valley
5-50	North Fork Battle Creek
5-51	Butte Creek Valley
5-52	Gray Valley
5-53	Dixie Valley
5-54	Ash Valley
5-56	Yellow Creek Valley
5-57	Last Chance Creek Valley
5-58	Clover Valley
5-59	Grizzly Valley
5-60	Humbug Valley
5-61	Chrome Town Area
5-62	Elk Creek Area
5-63	Stonyford Town Area
5-64	Bear Valley
5-65	Little Indian Valley
5-66	Clear Lake Cache Formation
5-68	Pope Valley
5-86	Joseph Creek
5-87	Middle Fork Feather River
5-88	Stony Gorge Reservoir
5-89	Squaw Flat
5-90	Funks Creek
5-91	Antelope Creek
5-92	Blanchard Valley
5-93	North Fork Cache Creek
5-94	Middle Creek
5-95	Meadow Valley

Description of the Region

The Sacramento River HR covers approximately 17.4 million acres (27,200 square miles). The region includes all or large portions of Modoc, Siskiyou, Lassen, Shasta, Tehama, Glenn, Plumas, Butte, Colusa, Sutter, Yuba, Sierra, Nevada, Placer, Sacramento, El Dorado, Yolo, Solano, Lake, and Napa counties (Figure 33). Small areas of Alpine and Amador counties are also within the region. Geographically, the region extends south from the Modoc Plateau and Cascade Range at the Oregon border, to the Sacramento-San Joaquin Delta. The Sacramento Valley, which forms the core of the region, is bounded to the east by the crest of the Sierra Nevada and southern Cascades and to the west by the crest of the Coast Range and Klamath Mountains. Other significant features include Mount Shasta and Lassen Peak in the southern Cascades, Sutter Buttes in the south central portion of the valley, and the Sacramento River, which is the longest river system in the State of California with major tributaries the Pit, Feather, Yuba, Bear and American rivers. The region corresponds approximately to the northern half of RWQCB 5. The Sacramento metropolitan area and surrounding communities form the major population center of the region. With the exception of Redding, cities and towns to the north, while steadily increasing in size, are more rural than urban in nature, being based in major agricultural areas. The 1995 population of the entire region was 2.372 million.

The climate in the northern, high desert plateau area of the region is characterized by cold snowy winters with only moderate precipitation and hot dry summers. This area depends on adequate snowpack to provide runoff for summer supply. Annual precipitation ranges from 10 to 20 inches. Other mountainous areas in the northern and eastern portions of the region have cold wet winters with large amounts of snow, which typically provide abundant runoff for summer supplies. Annual precipitation ranges from 40 to more than 80 inches. Summers are generally mild in these areas. The Coast Range and southern Klamath Mountains receive copious amounts of precipitation, but most of the runoff flows to the coast in the North Coastal drainage. Sacramento Valley comprises the remainder of the region. At a much lower elevation than the rest of the region, the valley has mild winters with moderate precipitation. Annual precipitation varies from about 35 inches in Redding to about 18 inches in Sacramento. Summers in the valley are hot and dry.

Most of the mountainous portions of the region are heavily forested and sparsely populated. Three major national forests (Mendocino, Trinity, and Shasta) make up the majority of lands in the Coast Range, southern Klamath Mountains, and the southern Cascades; these forests and the region's rivers and lakes provide abundant recreational opportunities. In the few mountain valleys with arable land, alfalfa, grain and pasture are the predominant crops. In the foothill areas of the region, particularly adjacent to urban centers, suburban to rural housing development is occurring along major highway corridors. This development is leading to urban sprawl and is replacing the former agricultural production on those lands. In the Sacramento Valley, agriculture is the largest industry. Truck, field, orchard, and rice crops are grown on approximately 2.1 million acres. Rice represents about 23 percent of the total irrigated acreage.

The Sacramento River HR is the main water supply for much of California's urban and agricultural areas. Annual runoff in the HR averages about 22.4 maf, which is nearly one-third of the State's total natural runoff. Major water supplies in the region are provided through surface storage reservoirs. The two largest surface water projects in the region are USBR's Shasta Lake (Central Valley Project) on the upper Sacramento River and Lake Oroville (DWR's State Water Project) on the Feather River. In all, there are more than 40 major surface water reservoirs in the region. Municipal, industrial, and agricultural supplies to the region are about 8 maf, with groundwater providing about 2.5 maf of that total. Much of the remainder of the runoff goes to dedicated natural flows, which support various environmental requirements, including in-stream fishery flows and flushing flows in the Delta.

Groundwater Development

Groundwater provides about 31 percent of the water supply for urban and agricultural uses in the region, and has been developed in both the alluvial basins and the hard rock uplands and mountains. There are 88 basins/subbasins delineated in the region. These basins underlie 5.053 million acres (7,900 square miles), about 29 percent of the entire region. The reliability of the groundwater supply varies greatly. The Sacramento Valley is recognized as one of the foremost groundwater basins in the State, and wells developed in the sediments of the valley provide excellent supply to irrigation, municipal, and domestic uses. Many of the mountain valleys of the region also provide significant groundwater supplies to multiple uses.

Geologically, the Sacramento Valley is a large trough filled with sediments having variable permeabilities; as a result, wells developed in areas with coarser aquifer materials will produce larger amounts of water than wells developed in fine aquifer materials. In general, well yields are good and range from one-hundred to several thousand gallons per minute. Because surface water supplies have been so abundant in the valley, groundwater development for agriculture primarily supplement the surface supply. With the changing environmental laws and requirements, this balance is shifting to a greater reliance on groundwater, and conjunctive use of both supplies is occurring to a greater extent throughout the valley, particularly in drought years. Groundwater provides all or a portion of municipal supply in many valley towns and cities. Redding, Anderson, Chico, Marysville, Sacramento, Olivehurst, Wheatland, Willows, and Williams rely to differing degrees on groundwater. Red Bluff, Corning, Woodland, Davis, and Dixon are completely dependent on groundwater. Domestic use of groundwater varies, but in general, rural unincorporated areas rely completely on groundwater.

In the mountain valleys and basins with arable land, groundwater has been developed to supplement surface water supplies. Most of the rivers and streams of the area have adjudicated water rights that go back to the early 1900s, and diversion of surface water has historically supported agriculture. Droughts and increased competition for supply have led to significant development of groundwater for irrigation. In some basins, the fractured volcanic rock underlying the alluvial fill is the major aquifer for the area. In the rural mountain areas of the region, domestic supplies come almost entirely from groundwater. Although a few mountain communities are supplied in part by surface water, most rely on groundwater. These groundwater supplies are generally quite reliable in areas that have sufficient aquifer storage or where surface water replenishes supply throughout the year. In areas that depend on sustained runoff, water levels can be significantly depleted in drought years and many old, shallow wells can be dewatered. During 2001, an extreme drought year on the Modoc Plateau, many well owners experienced problems with water supply.

Groundwater development in the fractured rocks of the foothills of the southern Cascades and Sierra Nevada is fraught with uncertainty. Groundwater supplies from fractured rock sources are highly variable in terms of water quantity and water quality and are an uncertain source for large-scale residential development. Originally, foothill development relied on water supply from springs and river diversions with flumes and ditches for conveyance that date back to gold mining era operations. Current development is primarily based on individual private wells, and as pressures for larger scale development increase, questions about the reliability of supply need to be addressed. Many existing foothill communities have considerable experience with dry or drought year shortages. In Butte County residents in Cohasset, Forest Ranch, and Magalia have had to rely on water brought up the ridges in tanker trucks. The suggested answer has been the development of regional water supply projects. Unfortunately, the area's development pattern of small, geographically dispersed population centers does not lend itself to the kind of financial base necessary to support such projects.

Groundwater Quality

Groundwater quality in the Sacramento River HR is generally excellent. However, there are areas with local groundwater problems. Natural water quality impairments occur at the north end of the Sacramento Valley in the Redding subbasin, and along the margins of the valley and around the Sutter Buttes, where Cretaceous-age marine sedimentary rocks containing brackish to saline water are near the surface. Water from the older underlying sediments mixes with the fresh water in the younger alluvial aquifer and degrades the quality. Wells constructed in these areas typically have high TDS. Other local natural impairments are moderate levels of hydrogen sulfide in groundwater in the volcanic and geothermal areas in the western portion of the region. In the Sierra foothills, there is potential for encountering uranium and radon-bearing rock or sulfide mineral deposits containing heavy metals. Human-induced impairments are generally associated with individual septic system development in shallow unconfined portions of aquifers or in fractured hard rock areas where insufficient soil depths are available to properly leach effluent before it reaches the local groundwater supply.

Water Quality in Public Supply Wells

From 1994 through 2000, 1,356 public supply water wells were sampled in 51 of the 88 basins and subbasins in the Sacramento River HR. Samples analyzed indicate that 1,282 wells, or 95 percent, met the state primary MCLs for drinking water. Seventy-four wells, or 5 percent, have constituents that exceed one or more MCL. Figure 34 shows the percentages of each contaminant group that exceeded MCLs in the 74 wells.

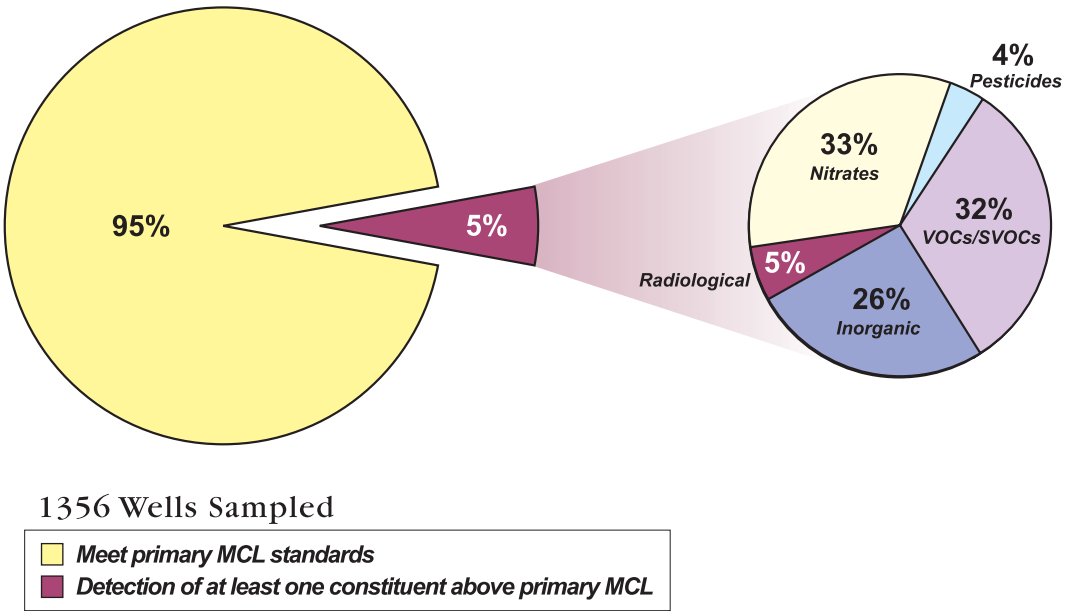

Figure 34 MCL exceedances in public supply wells in the Sacramento River Hydrologic Region

Table 25 lists the three most frequently occurring contaminants in each of the six contaminant groups and shows the number of wells in the HR that exceeded the MCL for those contaminants.

Table 25 Most frequently occurring contaminants by contaminant group in the Sacramento River Hydrologic Region

Contaminant group	Contaminant - # of wells	Contaminant - # of wells	Contaminant - # of wells
Inorganics – Primary	Cadmium – 4	Chromium (Total) – 3	3 tied at 2
Inorganics – Secondary	Manganese – 221	Iron – 166	Specific Conductance – 3
Radiological	Gross Alpha – 4		
Nitrates	Nitrate (as NO_3) – 22	Nitrate + Nitrite – 5	Nitrate Nitrogen (NO_3-N) – 2
Pesticides	Di(2-Ethylhexyl)phthalate – 4		
VOCs/SVOCs	PCE – 11	TCE – 7	Benzene – 4

PCE = Tetrachloroethylene
TCE = Trichloroethylene
VOC = Volatile Organic Compounds
SVOC = Semivolatile Organic Compound

Changes from Bulletin 118-80

Some modifications from the groundwater basins presented in Bulletin 118-80 are incorporated in this report. These are listed in Table 26.

Table 26 Modifications since Bulletin 118-80 of groundwater basins and subbasins in Sacramento River Hydrologic Region

Basin name	New number	Old number
Fandango Valley	5-1.02	5-39
Bucher Swamp Valley	deleted	5-42
Modoc Plateau Recent Volcanic Areas	deleted	5-32
Modoc Plateau Pleistocene Volcanic Areas	deleted	5-33
Mount Shasta Area	deleted	5-34
Sacramento Valley Eastside Tuscan Formation Highlands	deleted	5-55
Clear Lake Pleistocene Volcanics	deleted	5-67

No additional basins were assigned to the Sacramento River HR in this revision. However, four basins have been divided into subbasins. Goose Lake Valley Groundwater Basin (5-1) has been subdivided into two subbasins, Fandango Valley (5-39) was modified to be a subbasin of Goose Lake Valley. Redding Area Groundwater Basin has been subdivided into six subbasins, Sierra Valley Groundwater Basin has been subdivided into two subbasins, and the Sacramento Valley Groundwater Basin has been subdivided into 18 subbasins.

There are several deletions of groundwater basins from Bulletin 118-80. Bucher Swamp Valley Basin (5-42) was deleted due to a thin veneer of alluvium over rock. Modoc Plateau Recent Volcanic Areas (5-32), Modoc Plateau Pleistocene Volcanic Areas (5-33), Mount Shasta Area (5-34), Sacramento Valley Eastside Tuscan Formation Highlands (5-55), and Clear Lake Pleistocene Volcanics (5-67) are volcanic aquifers and were not assigned basin numbers in this bulletin. These are considered to be groundwater source areas as discussed in Chapter 6.

Table 27 Sacramento River Hydrologic Region groundwater data

Basin/Subbasin	Basin Name	Area (acres)	Groundwater Budget Type	Well Yields (gpm)		Types of Monitoring			TDS (mg/L)	
				Maximum	Average	Levels	Quality	Title 22	Average	Range
5-1	GOOSE LAKE VALLEY									
5-1.01	LOWER GOOSE LAKE	36,000	B	-	400	9	9	-	183	68 - 528
5-1.02	FANDANGO VALLEY	18,500	B	2,000	-	3	-	-	-	-
5-2	ALTURAS AREA								357	180 - 800
5-2.01	SOUTH FORK PITT RIVER	114,000	B	5,000	1,075	9	-	8	-	-
5-2.02	WARM SPRINGS VALLEY	68,000	B	400	314	3	-	11	-	-
5-3	JESS VALLEY	6,700	B		3,000	-	-	-	-	-
5-4	BIG VALLEY	92,000	B	4,000	880	19	9	10	260	141 - 633
5-5	FALL RIVER VALLEY	54,800	B	1,500	266	16	7	3	174	115 - 232
5-6	REDDING AREA									
5-6.01	BOWMAN	85,330	B	2,000	589	8	2	13	-	70 - 247
5-6.02	ROSEWOOD	45,320	B	-	-	4	-	-	-	118 - 218
5-6.03	ANDERSON	98,500	B	1,800	46	11	10	69	194	109-320
5-6.04	ENTERPRISE	60,900	B	700	266	11	3	43	-	160 - 210
5-6.05	MILLVILLE	67,900	B	500	254	6	5	4	140	-
5-6.06	SOUTH BATTLE CREEK	32,300	B	-	-	0	0	0	360	-
5-7	LAKE ALMANOR VALLEY	7,150	B	-	-	10	4	4	105	53 - 260
5-8	MOUNTAIN MEADOWS VALLEY	8,150	B	-	-	-	-	-	-	-
5-9	INDIAN VALLEY	29,400	B	-	-	-	4	9	-	-
5-10	AMERICAN VALLEY	6,800	B	40	40		4	11	-	-
5-11	MOHAWK VALLEY	19,000	B	-	500	1	2	15	248	210 - 285
5-12	SIERRA VALLEY									
5-12.01	SIERRA VALLEY	117,700	B	1,500	640	34	15	9	312	110 - 1,620
5-12.02	CHILCOOT	7,550	B	-	-	15	-	8	-	-
5-13	UPPER LAKE VALLEY	7,260	B	900	302	12	3	6	-	-
5-14	SCOTTS VALLEY	7,320	B	1,200	171	9	1	9	158	140 - 175
5-15	BIG VALLEY	24,210	B	1,470	475	49	11	7	535	270 - 790
5-16	HIGH VALLEY	2,360	B	100	37	5	2	-	598	480 - 745
5-17	BURNS VALLEY	2,900	B	-	30	1	5	-	335	280 - 455
5-18	COYOTE VALLEY	6,530	B	800	446	6	3	3	288	175 - 390
5-19	COLLAYOMI VALLEY	6,500	B	1,000	121	10	4	3	202	150 - 255
5-20	BERRYESSA VALLEY	1,400	C	-	-	0	-	0	-	-
5-21	SACRAMENTO VALLEY									
5-21.50	RED BLUFF	266,750	B	1,200	363	30	10	56	207	120 - 500
5-21.51	CORNING	205,640	B	3,500	977	29	7	30	286	130 - 490
5-21.52	COLUSA	918,380	B	5,600	984	98	30	134	391	120 - 1,220
5-21.53	BEND	20,770	B	-	275	0	3	9		334-360
5-21.54	ANTELOPE	18,710	B	800	575	4	5	22	296	-
5-21.55	DYE CREEK	27,730	B	3,300	890	8	1	3	240	159 - 396
5-21.56	LOS MOLINOS	33,170	B	1,000	500	3	3	9	217	
5-21.57	VINA	125,640	B	3,850	1,212	23	5	69	285	48 - 543
5-21.58	WEST BUTTE	181,600	B	4,000	1,833	32	8	36	293	130 - 676

Table 27 Sacramento River Hydrologic Region groundwater data (continued)

Basin/Subbasin	Basin Name	Area (acres)	Groundwater Budget Type	Well Yields (gpm)		Types of Monitoring			TDS (mg/L)	
				Maximum	Average	Levels	Quality	Title 22	Average	Range
5-21.59	EAST BUTTE	265,390	B	4,500	1,019	43	4	44	235	122 - 570
5-21.60	NORTH YUBA	100,400	C	4,000	-	21	-	32	-	-
5-21.61	SOUTH YUBA	107,000	C	4,000	1,650	56	-	6	-	-
5-21.62	SUTTER	234,000	C	-	-	34	-	115	-	-
5-21.64	NORTH AMERICAN	351,000	A	-	800	121	-	339	300	150 - 1,000
5-21.65	SOUTH AMERICAN	248,000	C	-	-	105	-	247	221	24-581
5-21.66	SOLANO	425,000	C	-	-	123	23	136	427	150 - 880
5-21.67	YOLO	226,000	B	4,000+	1,000	127	20	185	880	480 - 2,060
5-21.68	CAPAY VALLEY	25,000	C	-	-	11	-	3	-	-
5-30	LOWER LAKE VALLEY	2,400	B	100	37		3	5	568	290 - 1,230
5-31	LONG VALLEY	2,600	B	100	63	-	-	-	-	-
5-35	MCCLOUD AREA	21,320	B	-	380	-	-	1	-	-
5-36	ROUND VALLEY	7,270	B	2,000	800	2				148 - 633
5-37	TOAD WELL AREA	3,360	B	-	-	-	-	-	-	-
5-38	PONDOSA TOWN AREA	2,080	B	-	-	-	-	-	-	-
5-40	HOT SPRINGS VALLEY	2,400	B	-	-	-	-	-	-	-
5-41	EGG LAKE VALLEY	4,100	B	-	20	-	-	-	-	-
5-43	ROCK PRAIRIE VALLEY	5,740	B	-	-	-	-	-	-	-
5-44	LONG VALLEY	1,090	B	-	-	-	-	-	-	-
5-45	CAYTON VALLEY	1,300	B	-	400	-	-	-	-	-
5-46	LAKE BRITTON AREA	14,060	B	-	-	-	-	2	-	-
5-47	GOOSE VALLEY	4,210	B	-	-	-	-	-	-	-
5-48	BURNEY CREEK VALLEY	2,350	B	-	-	-	-	2	-	-
5-49	DRY BURNEY CREEK VALLEY	3,070	B	-	-	-	-	-	-	-
5-50	NORTH FORK BATTLE CREEK VALLEY	12,760	B	-	-	-	-	3	-	-
5-51	BUTTE CREEK VALLEY	3,230	B	-	-	-	-	-	-	-
5-52	GRAYS VALLEY	5,440	B	-	-	-	-	-	-	-
5-53	DIXIE VALLEY	4,870	B	-	-	-	-	-	-	-
5-54	ASH VALLEY	6,010	B	3,000	2,200	-	-	-	-	-
5-56	YELLOW CREEK VALLEY	2,310	B	-	-	-	-	-	-	-
5-57	LAST CHANCE CREEK VALLEY	4,660	B	-	-	-	-	-	-	-
5-58	CLOVER VALLEY	16,780	B	-	-	-	-	-	-	-
5-59	GRIZZLY VALLEY	13,400	B	-	-	-	-	1	-	-
5-60	HUMBUG VALLEY	9,980	B	-	-	-	-	8	-	-
5-61	CHROME TOWN AREA	1,410	B	-	-	-	-	-	-	-
5-62	ELK CREEK AREA	1,440	B	-	-	-	-	-	-	-
5-63	STONYFORD TOWN AREA	6,440	B	-	-	-	-	-	-	-
5-64	BEAR VALLEY	9,100	B	-	-	-	-	-	-	-
5-65	LITTLE INDIAN VALLEY	1,270	B	-	-	-	-	-	-	-
5-66	CLEAR LAKE CACHE FORMATION	30,000	B	245	52		-	4	-	-
5-68	POPE VALLEY	7,180	C	-	-	-	-	1	-	-
5-86	JOSEPH CREEK	4,450	B	-	-	-	-		-	-

Table 27 Sacramento River Hydrologic Region groundwater data (continued)

Basin/Subbasin	Basin Name	Area (acres)	Groundwater Budget Type	Well Yields (gpm)		Types of Monitoring			TDS (mg/L)	
				Maximum	Average	Levels	Quality	Title 22	Average	Range
5-87	MIDDLE FORK FEATHER RIVER	4,340	B	-	-	-	-	2	-	-
5-88	STONY GORGE RESERVOIR	1,070	B	-	-	-	-	-	-	-
5-89	SQUAW FLAT	1,300	C	-	-	-	-	-	-	-
5-90	FUNKS CREEK	3,000	C	-	-	-	-	-	-	-
5-91	ANTELOPE CREEK	2,040	B	-	-	-	-	-	-	-
5-92	BLANCHARD VALLEY	2,200	B	-	-	-	-	-	-	-
5-93	NORTH FORK CACHE CREEK	3,470	C	-	-	-	-	-	-	-
5-94	MIDDLE CREEK	700	B	-	75	-	-	1	-	-
5-95	MEADOW VALLEY	5,730	B	-	-	-	-	1	-	-

gpm - gallons per minute
mg/L - milligram per liter
TDS -total dissolved solids

Sacramento Valley Groundwater Basin, North Yuba Subbasin

- Groundwater Basin Number: 5-21.60
- County: Yuba
- Surface Area: 50,000 acres (78 square miles)

Basin Boundaries and Hydrology

The North Yuba subbasin lies in the eastern central portion of the Sacramento Groundwater Basin. It is bounded on the north by Honcut Creek, the Feather River on the west, on the south by the Yuba River, and on the east by the Sierra Nevada. Based on an analysis of hydrographs the Yuba River and Feather Rivers create a groundwater divide, which act as flow barriers in the shallow subsurface. Precipitation is nearly 20 inches in the southwest too greater than 32 inches in the northeast.

Hydrogeologic Information

The following geologic discussion is generally from Bookman-Edmonston Engineering, Inc. (1992), except where noted.

Water Bearing Formations

The North Yuba subbasin aquifer system is comprised of continental deposits of Quaternary to Late Tertiary (Pliocene) age. The cumulative thickness of these deposits increases from a few hundred feet near the Sierra Nevada foothills on the east to over 1,000 feet along the western margin of the basin.

Recent Valley Sedimentary Deposits. Dredger tailing deposits occur along the Feather River in the northwest and the Yuba River in the southeast of North Yuba Groundwater. The coarse gravels and cobbles can be up to 125 feet thick and are highly permeable. Stream channel and floodplain materials occur as coarse sand and gravels along present stream channels of the Yuba River, Feather River, and Honcut Creek. Coarser grained materials occur near streams with thickness up to 110 feet. Both grain size and thickness decrease with increased distance from streams. These deposits are highly permeable and provide for large amounts of groundwater recharge within the subbasin. Well yields are reported in the range of 2,000 to 4,000 gpm.

Pleistocence Victor Formation. The Victor Formation lies unconformably above the Laguna Formation. The majority of the formation occurs as alluvium throughout the North Yuba Groundwater subbasin, but floodplain deposits are present along stream channels above the alluvium.

Pleistocene Floodplain Deposits. These deposits occur as gravelly sand, silt, and clay from flood events along the Feather River and its tributaries. This unit overlies the Older Alluvium, underlies Quaternary Deposits, and ranges in thickness from 5 to 15 feet. These deposits provide a good medium for groundwater recharge, provided the groundwater can pass the lower contact with the Older Alluvium.

Pleistocene Alluvium. This unit occurs at over 50 percent of the basin surface and at least 60 percent of its irrigated agricultural lands. Its thickness

is highly variable due to its lower contact with the Laguna Formation. The Older Alluvium is comprised of Sierran alluvial fan deposits of loosely compacted silt, sand, and gravel with lesser amounts of clay deposits. The deposits occur as lenticular beds with decreasing thickness and grain size with increasing distance from the Yuba River and the foothills. Hardpan and claypan soils have developed to form an impermeable surface, but below this the Older Alluvium is moderately permeable and provides for most of the groundwater from domestic and shallow irrigation wells. Wells in the older alluvium have yields up to 1,000 gpm.

Pliocene Laguna Formation. The Laguna Formation is the most extensive water-bearing unit within the North Yuba Groundwater subbasin. The formation is comprised of reddish to yellowish or brown silt to sandy silt with abundant clay and minor lenticular gravel beds. It overlies the Mehrten Formation and occurs at the surface intermittently at the east end of the basin (Olmsted and Davis 1961). The continental deposits of the Laguna dip to the west beneath the Victor Formation and range in thickness from 400 feet near the Yuba River up to 1,000 feet in the southwest portion of the county. Although the occurrence of thin sand and gravel zones is common, many of them have reduced permeability due to cementation. This, coupled with its fine-grained character, leads to an overall low permeability for the Laguna Formation. Most of the groundwater produced from wells in the Laguna comes from overlying units.

Miocene-Pliocene Mehrten Formation. The Mehrten Formation is a sequence of volcanic rocks of late Miocene through middle Pliocene age. Surficial exposures are limited to a few square miles in the northeast corner of the basin (Olmsted and Davis 1961) and thickness varies from 200 feet near the eastern margin of the basin to 500 feet near the Feather River. The Merhten Formation is composed of two distinct units. One unit occurs as intervals of gray to black, well-sorted fluvial andesitic sand (up to 20 feet thick), with andesitic stream gravel lenses and brown to blue clay and silt beds. These sand intervals are highly permeable and wells completed in them can produce high yields. The second unit is an andesitic tuff-breccia that acts as a confining layer between sand intervals. A more detailed description of the Mehrten Formation can be found in described in Bulletin 118-6 (DWR 1978).

Recharge Areas

Stream channel and floodplain deposits present along the Yuba River, Feather River, and Honcut Creek are highly permeable and provide for large amounts of groundwater recharge within the subbasin. The potential for artificial recharge of groundwater in the basin is limited since areas which have available storage space typically have overlying soils with very low infiltration rates that would restrict recharge potential. Bookman-Edmonston Engineering, Inc. (1992)

Groundwater Level Trends

From 1950 through 1990, average basin groundwater levels remained relatively constant. Bookman-Edmonston Engineering, Inc. (1992)

Groundwater Storage

Groundwater Storage Capacity. An unpublished study by Bookman-Edmonston Engineering, Inc. (1992) estimated groundwater storage in the North Yuba basin. The estimated storage capacity for the North Yuba basin is 620,000 acre-feet. This estimate was based on an area of 49,800 acres, which closely corresponds to boundaries used by DWR. The Bookman-Edmonston Engineering, Inc. calculated an average specific yield of 6.9 percent and an assumed thickness of 200 feet.

Groundwater in Storage. There are no published reports, which discuss groundwater in storage.

Groundwater Budget (Type C)

Previous DWR unpublished studies have estimated natural and applied recharge. DWR has also estimated urban and agriculture extractions and subsurface outflow. Inflows include natural recharge of 51,100 af and applied recharge of 13,900 af. Outflows include urban extraction of 9,000 af, agricultural extraction of 65,800 af, and subsurface outflow of 21,800 af.

Groundwater Quality

Characterization. The generally good water quality characteristics are apparent in the overall salinity of ground water in the study area. In general, total dissolved solids (TDS) concentrations in the study area are below 500 milligrams per liter (mg/l) throughout the entire basin. Bookman-Edmonston Engineering, Inc. (1992). DWR maintains data for 35 water quality wells in the North Yuba Subbasin. Data collected from these wells indicate a TDS range of 149 to 655 mg/l and a median of 277 mg/l. The primary water chemistry in the area, mapped by Bertoldi, 1991 indicates calcium magnesium bicarbonate or magnesium calcium bicarbonate groundwater. Some magnesium bicarbonate can be found in the northwest portion of the basin.

Impairments. There are no documented impairments to groundwater quality in the subbasin.

Water Quality in Public Supply Wells

Constituent Group[1]	Number of wells sampled[2]	Number of wells with a concentration above an MCL[3]
Inorganics – Primary	27	0
Radiological	23	1
Nitrates	35	1
Pesticides	23	0
VOCs and SVOCs	24	2
Inorganics – Secondary	27	7

[1] A description of each member in the constituent groups and a generalized discussion of the relevance of these groups are included in *California's Groundwater – Bulletin 118* by DWR (2003).
[2] Represents distinct number of wells sampled as required under DHS Title 22 program from 1994 through 2000.

[3] Each well reported with a concentration above an MCL was confirmed with a second detection above an MCL. This information is intended as an indicator of the types of activities that cause contamination in a given basin. It represents the water quality at the sample location. It does not indicate the water quality delivered to the consumer. More detailed drinking water quality information can be obtained from the local water purveyor and its annual Consumer Confidence Report.

Well Characteristics

	Well yields (gal/min)	
Municipal/Irrigation	Range: 500-4,000	Average: 1,400 (47 well completion reports)
	Total depths (ft)	
Domestic	Range: 37-550	Average: 130 (247 well completion reports)
Municipal/Irrigation	Range: 75-550 feet	Average: 244 (58 well completion reports)

Active Monitoring Data

Agency	Parameter	Number of wells /measurement frequency
DWR YCWA	Groundwater levels	7 wells semi-annually 2 monthly
DWR YCWA	Mineral, nutrient, & minor element.	13 wells semi-annually, 7 wells biennially,
Department of Health Services	Coliform, nitrates, mineral, organic chemicals, and radiological.	32 wells as required in Title 22, Calif. Code of Regulations

Basin Management

Groundwater management:	Cordua Irrigation District-AB3030 plan, Yuba County Water Agency- AB3030 plan
Water agencies	
Public	Yuba County Water Agency, Ramirez Water District, Cordua Irrigation District
Private	Hallwood Irrigation District, Browns Valley Irrigation District

References Cited

Bookman-Edmonston Engineering, Inc. 1992. *Ground Water Resources and Management in Yuba County*. Unpublished report for Yuba County Water Agency.

California Department of Water Resources (DWR). 1978. *Evaluation of Ground Water Resources: Sacramento Valley*. Bulletin 118-6.

Olmstead, F.H., and Davis, G.H. 1961. *Geologic Features and Ground-Water Storage Capacity of the Sacramento Valley*, California. U.S. Geological Survey Water-Supply Paper 1497.

Additional References

Bertoldi, G.L. 1974. *Estimated Permeabilities for Soils in the Sacramento Valley*, California. U.S. Geological Survey Water-Resources Investigations Report 51-73.

Bryan, Kirk. 1923. *Geology and Ground-Water Resources of the Sacramento Valley*, California. U.S. Geological Survey Water-Supply Paper 495.

California Department of Water Resources. 1952. *Historical Ground Water Levels in Yuba County*.

California State Water Resources Board. *Sutter-Yuba Counties Investigation*. Bulletin 6.

Fogelman, R.P. 1979. *Chemical Quality of Ground Water in the Eastern Sacramento Valley*, California. U.S. Geological Survey Water-Resource Investigations Report 78-124.

Fogelman, R.P and Rockwell, G.L. 1977. *Descriptions and Chemical Analyses for selected wells in the Eastern Sacramento Valley*, California. U.S. Geological Survey Open-File Report 77-486.

Helley, E.J., and Harwood, D.S. 1985. *Geologic Map of the Late Cenozoic Deposits of the Sacramento Valley and Northern Sierran Foothills*, California. U.S. Geological Survey Miscellaneous Field Studies Map MF-1790.

Harwood, D.S., and Helley, E.J. 1987. *Late Cenozoic Tectonism of the Sacramento Valley*, California. U.S. Geological Survey Professional Paper 1359.

Page, R.W. 1974. *Base and Thickness of the Post-Eocene Continental Deposits in the Sacramento Valley*, California. U.S. Geological Survey Water-Resource Investigations Report 45-73.

Page, R.W. 1986. *Geology of the Fresh Ground-Water Basin of the Central Valley*. California, with Texture Maps and Sections. U.S. Geological Survey Professional Paper 1401-C.

Errata

Changes made to the basin description will be noted here.