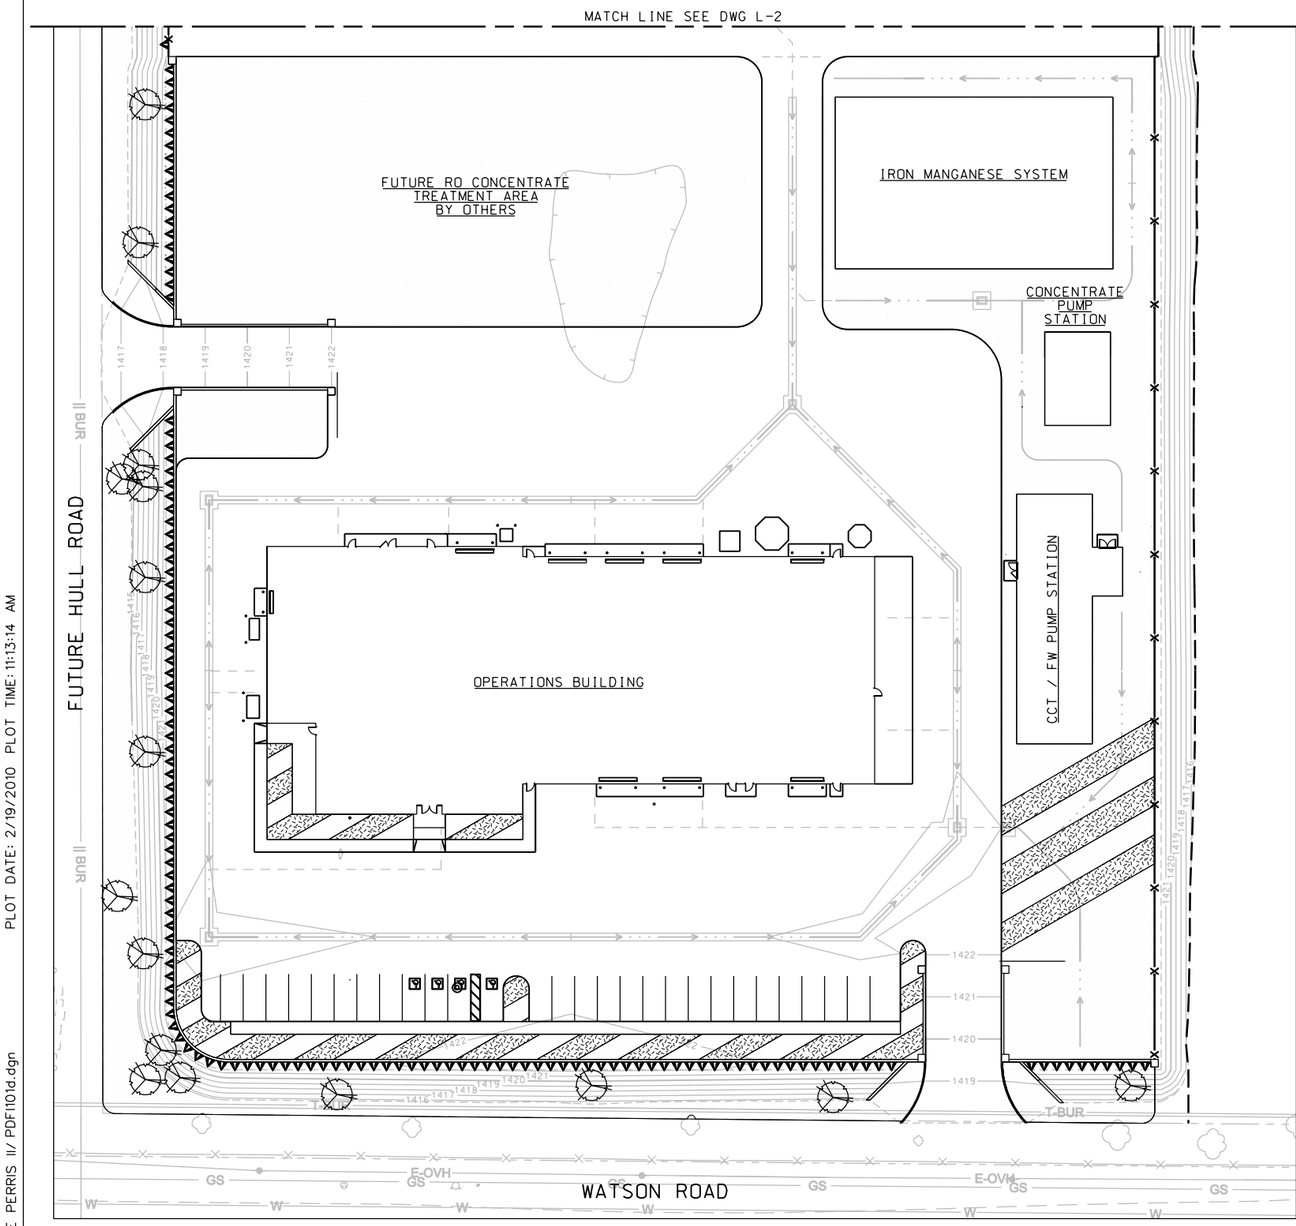



PLANTING LEGEND

TREES

SYMBOL	BOTANICAL NAME	COMMON NAME	SIZE	NOTES
	RHUS LANCEA	AFRICAN SUMAC	24" BOX	

VINES AND ESPALIERS

SYMBOL	BOTANICAL NAME	COMMON NAME	SIZE	NOTES
▲	TECOMARIA CAPENSIS	CAPE HONEYSUCKLE	1 GAL.	STAKED - REMOVE FROM NURSERY STAKE AND ATTACH TO ADJACENT CHAIN LINK FENCE W/ GREEN NURSERY TAPE

GROUNDCOVER

SYMBOL	DESCRIPTION	NOTES
	3" LAYER CRUSHED ROCK - 'CALIFORNIA GOLD' 3/8" SIZE AVAILABLE FROM SOUTHWEST BOULDER & STONE (800-540-1147). COMPACT SUBGRADE PRIOR TO INSTALLATION	INSTALL MEDIUM WEIGHT WEED BARRIER FABRIC WITH ANCHOR PINS ON GROUND SURFACE PRIOR TO GRAVEL PLACEMENT
	3"-7" LAYER CRUSHED ROCK - 'SOUTHWEST BROWN' 1"-5" SIZE AVAILABLE FROM SOUTHWEST BOULDER & STONE (800-540-1147). COMPACT SUBGRADE PRIOR TO INSTALLATION	

NOTES

CONTRACTOR SHALL LOCATE ALL UNDERGROUND UTILITIES IN THE FIELD PRIOR TO THE INSTALLATION OF TREES. ALL TREES SHALL BE PLANTED AT LEAST 5' FROM ANY UNDERGROUND UTILITY SUCH AS SEWER, GAS, STORM DRAIN, ELECTRICAL, CABLE, OR TELEPHONE. CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT OF ANY CONFLICT BETWEEN TREE LOCATIONS AND UNDERGROUND UTILITIES.

VINES TO BE PLACED IN ALIGNMENT WITH SPACES IN CMU WALL AT 5' ON CENTER, PER SHEET S-25. VINES ALIGNED WITH CMU WALL SPACE SHALL BE TRAINED TO THE OPPOSITE SIDE OF THE WALL. VINES TO BE PLACED 10' ON CENTER ALONG CHAINLINK FENCE.

SYMBOL	DESCRIPTIONS	DATE	APPROVAL

REVISIONS

EASTERN MUNICIPAL WATER DISTRICT
PERRIS II DESALINATION FACILITY
PERRIS, CALIFORNIA

PLANTING
PLAN 1

U.S. ARMY ENGINEER DISTRICT
LOS ANGELES
CORPS OF ENGINEERS

DESIGNED BY: C SLATER
DRAWN BY: A GORDEN
CHECKED BY: I FEGHALI

ART JUNG, P.E.
CHIEF, DESIGN BRANCH
SUBMITTED BY:

CADD FILE NAME: PDF1101d.dgn

SPEC. NO.: NOT APPLICABLE

L.A. DISTRICT FILE NO. XXX-XXXX

CH2MHILL

REGISTERED PROFESSIONAL ENGINEER
IRAJ E. FEGHALI
No. C67928
Exp. 6-30-11
CIVIL
STATE OF CALIFORNIA

DATE: 10/05/09

L-1

SHEET **216** OF **226** SHEETS

NDM-SCO:EMWD USACE PERRIS II/ PDF1101d.dgn PLOT DATE: 2/19/2010 PLOT TIME: 11:13:14 AM