



UNIVERSITY of CALIFORNIA
Agriculture & Natural Resources

Cooperative Extension Kern County

1031 S. Mt. Vernon Avenue • Bakersfield, CA 93307
Telephone 661-868-6200 • Fax 661-868-6208
Website: <http://cekern.ucdavis.edu>



Fethi BenJemaa, Ph.D.
Chief, Agricultural Water Use Efficiency
California Department of Water Resources
P.O. Box 942836 | Sacramento, California | 94236-0001

10/31/11

Dear Fethi and all A1 subcommittee participants,

Note: This paper is a draft for discussion purposes only for the SBX7-7 A1 subcommittee and has not been properly formatted regarding references and figures. Some form of the example at the end will eventually be submitted for peer-reviewed publication.

RE: Using salinity / chloride balance to track field level WUE in the San Joaquin Valley

As we have continued our discussions on providing the state legislature with suitable methodology for measuring AgWUE from the field to basin level I have listened intently to the discussion and points made by various participants. The general consensus appears to emphasize the need for finding the best, most practical methodology for measuring WUE at the district and/or basin level. This makes great sense as the WD's and umbrella agencies are already the main reporting units and in the best position, potentially, to sort out real "recoverable", versus "non-recoverable" (lost) water, and thereby the best estimate of real efficiency for that basin. I agree, completely with this premise.

However, we are also charged with submitting a methodology for determining "field level" WUE, the level at which I have spent most of my career. Most of the discussion at this level (and others) has centered on using crop coefficients and CIMIS, and/or published crop production functions and measured crop yield to determine field ET. If we know the ET and have a true measure of the applied water (with no runoff) then we can calculate the deep percolation and thus:

$$\text{Field WUE} = \text{ETc} / \text{Applied Water}$$

(We'll let the WD worry about whether or not the deep percolation is "recoverable" or not.)

This approach can be initially done without collecting any field data at all. We have "normal year" and real-time ETo estimates using CIMIS and published Kc's for most of the major crops, and the WD's have the water orders for most fields (even metered ac-ft totals for many of these) already collected. Just assume no runoff for sprinkler or micro irrigated fields, true field ET estimates and that water meters and orders are all accurate. Do I hear some laughter by this time? I should!

All these assumptions have big error bars on them and are very expensive to document/monitor over the entire season. I personally have documented ETc's in citrus, alfalfa, grapes and most notably in almonds that exceed published values by 10 to 25% (58 inches in microsprinkler irrigated almonds, most recently. As a county-based extension advisor I have also seen many fields where salinity, pest pressure and/or other agronomic/management factors have reduced the vigor of the crop/orchard and thereby real crop ETc. Roger Reynolds from Summers Engineering pointed these issues out in response to the insistence by some of our group that we include a methodology to measure "economic WUE". There are a host of other factors that impact crop water use and yield that are not a part of the direct irrigation process and really beyond the scope of this committee to enumerate.

SALINITY / CHLORIDE MASS BALANCE:

Some of our group have balked at the idea of including a leaching fraction in our calculations as a beneficial use. Anyone farming in the San Joaquin Valley knows that salt accumulation is a problem and is ignored at ones peril. An ac-ft of CA Aqueduct water by the time it reaches Kern County has 800 to 900 pounds of salt in it, about 70 to 80 pounds of chloride alone! It is relatively simple to get an average salt / chloride content in your irrigation water over the season. The ratio of this concentration divided by the salt concentration of the water percolating below the rootzone is the leaching fraction. This straightforward mass balance serves as the core to several empirical models equating the ratio of the irrigation water salinity to the average rootzone soil saturation extract salinity (measured as electroconductivity (ECe) or chloride):

In its simplest form, the leaching fraction (LF) or water percolating below the rootzone can be reduced to a simple mass balance of salt in, salt out:

$$\frac{D_{dw}}{D_{iw}} = \frac{EC_{iw}}{EC_{dw}}$$

Where:

D_{dw} = depth of drain water below rootzone

D_{iw} = depth of irrigation water

EC_{iw} = electroconductivity (or chloride concentration) of irrigation water

EC_{dw} = electroconductivity (or chloride concentration) of drain water

The use of natural chloride concentrations in irrigation water is the best choice as total crop uptake is minimal as is precipitation or soil adsorption of this highly soluble anion. The trick is in identifying the real bottom of the rootzone and obtaining a truly representative number for the salinity / chloride concentration in the water draining below this depth.

The advantage to this method is that the chloride tracer is free! It comes with the water and needs no batteries, meteorological equipment or moving parts. The downside is that representative soil sampling to the bottom of the rootzone is necessary for the most accurate answer. If one wants to simply use one of the empirical coefficients then sampling to a depth of 3 feet might be sufficient for most fields. Four methods are presented. The first three utilize empirical models from real field data equating the leaching fraction with average rootzone salinity. The fourth method simply uses the above mass balance with real data from the end of 2010 from a SJV almond orchard producing over 4,000 lbs/ac of nuts.

SIGNIFICANCE: The balance of chloride is exactly specific to that field and will reach a reasonably steady state over the years. Most of these models show that average rootzone salinity about doubles with a 15% leaching fraction (i.e. deep percolation), triples with 10% LF and quadruples with a 5% leaching fraction. This mass balance automatically integrates all the other agronomic and management factors that impact field-level deep percolation.

METHOD 1: Avg Rootzone ECe (Rhodes, 1974 and FAO 29, 1994)

Ayers, R.S., D.W. Westcot. Water Quality for Agriculture. FAO Irrigation and Drainage Paper 29 Rev. 1, Reprinted 1989, 1994 . <http://www.fao.org/DOCREP/003/T0234E/T0234E00.htm>

Originally in: Rhoades J.D. 1974. "Drainage for salinity control". Drainage for Agriculture. Van Schilfgaarde J. (ed). Amer. Soc. Agron. Monograph No. 17, pp 433–462.

The necessary leaching requirement (LR) can be estimated from Figure 7 for general crop rotations. For more exact estimates for a particular crop, the leaching requirement equation (9) (Rhoades 1974; and Rhoades and Merrill 1976) should be used:

$$LR = \frac{EC_w}{5 (EC_e) - EC_w} \quad \text{FAO 29} \quad (9)$$

where: LR = the minimum leaching requirement needed to control salts within the tolerance (EC_e) of the crop with ordinary surface methods of irrigation
 EC_w = salinity of the applied irrigation water in dS/m
 EC_e = average soil salinity tolerated by the crop as measured on a soil saturation extract. Obtain the EC_e value for the given crop and the appropriate acceptable yield from Table 4. It is recommended that the EC_e value that can be expected to result in at least a 90 percent or greater yield be used in the calculation. (Figure 7 was developed using EC_e values for the 100 percent yield potential.) For water in the moderate to high salinity range (>1.5 dS/m), it might be better to use the EC_e value for maximum yield potential (100 percent) since salinity control is critical to obtaining good yields.

The total annual depth of water that needs to be applied to meet both the crop demand and leaching requirement can be estimated from equation (7).

$$AW = \frac{ET}{1 - LR}$$

$$LR = \frac{EC_i}{5EC_e - EC_i}$$

where: AW = depth of applied water (mm/year)
 ET = total annual crop water demand (mm/year)
 LR = leaching requirement expressed as a fraction (leaching fraction)

$$FieldWUE = 1 - LR$$

EXAMPLES		Rhodes 1974		Applied	
Irrig Water EC (dS/m)	Rootzone ECe (dS/m)	Avg ECe / Irrig EC	LR- Flood	Water as %ET	Final WUE
0.5	1	2.0	0.111	113%	88.9%
0.5	2	4.0	0.053	106%	94.7%
0.5	3	6.0	0.034	104%	96.6%
0.5	4	8.0	0.026	103%	97.4%
0.5	5	10.0	0.020	102%	98.0%
0.5	6	12.0	0.017	102%	98.3%
0.5	7	14.0	0.014	101%	98.6%
0.5	8	16.0	0.013	101%	98.7%
1.0	1	1.0	0.250	133%	75.0%
1.0	2	2.0	0.111	113%	88.9%
1.0	3	3.0	0.071	108%	92.9%
1.0	4	4.0	0.053	106%	94.7%
1.0	5	5.0	0.042	104%	95.8%
1.0	6	6.0	0.034	104%	96.6%
1.0	7	7.0	0.029	103%	97.1%
1.0	8	8.0	0.026	103%	97.4%

EXAMPLE REQUIREMENTS

- DATA: -Average applied water electroconductivity (ECi) or chloride concentration.
- Average soil saturation extract rootzone EC (ECe) or chloride concentration.

This example assumes no specific rootzone depth; only that an average end of season rootzone soil saturation extract ECe has been obtained for the entire crop rootzone. The calculated Leaching Requirement (LR) then represents the actual leaching fraction, allowing for a calculation of the field level Water Use Efficiency.


Conditions: No significant precipitation of dissolved salts carried in with irrigation water nor dissolution of native salts within the soil profile has occurred. Calculating this mass balance using chloride concentrations is prone to less error than using ECe.

CAUTION: A single heavy irrigation event at the end of the season when there is reduced crop ET can result in considerable leaching and displacement of salts in the top 3 to 4 feet of soil. This final salinity or chloride mass balance will more reflect that final application efficiency than the true average for the whole season -- giving an erroneously low seasonal WUE. Conversely, a "light" irrigation or rain event at the end of the season with close to 100% WUE will not artificially increase the seasonal WUE as the salts are retained within the rootzone and will just be added in with the total seasonal mass balance.

METHOD 2: Avg Rootzone ECe and Reclamation (Hoffman, 1980)

BASIC RECLAMATION
Required Leaching (ft water/ft depth soil) = K / (Desired EC/Original EC)
 (K factor of 0.3 for continuous ponding.)
 (K can be as small as 0.1)
 (K factor of 0.15 for sprinkling or drip.)

$$R_{qdLeaching} \left(\frac{D_{water}}{D_{soil}} \right) = \frac{k}{\frac{EC_{desired}}{EC_{original}}}$$

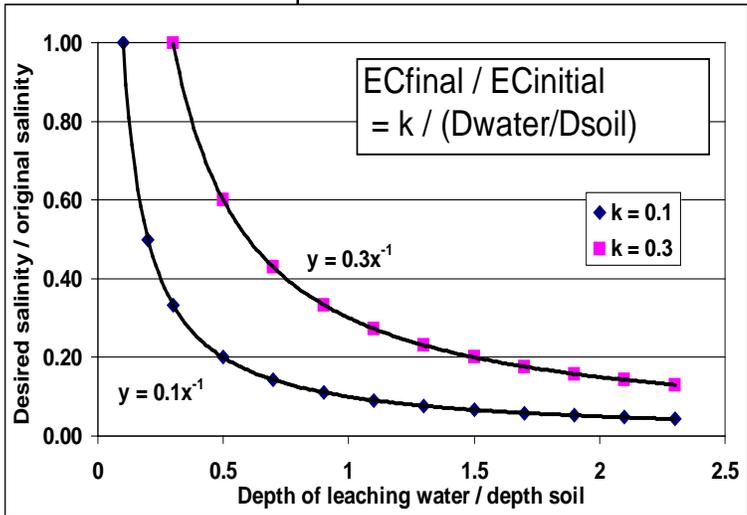

$$FieldWUE = 1 - R_{qdLeaching}$$

Karen, R. 1996. "Reclamation of saline, sodic, and boron-affected soils." Agricultural Salinity Assessment and Management. ASCE. New York, N.Y. Manual No. 71:410-415

Original Ref:

Hoffman G.J. 1980 Guidelines for reclamation of salt-affected soils. Proc. Inter-American Salinity and Water Management Technology Conference. Juarez, Mexico. 11–12 December 1980. pp. 49–64.

Hoffman 1980 EXAMPLES

Irrig Water EC (dS/m)	Rootzone ECe (dS/m)	Avg ECe / Irrig EC	Required	k_{0.1}	Final WUE	Required	k_{0.15}	Final WUE
			Leaching (ft irr/ft soil) (k _{0.1})	Applied Water as %ET		Leaching (ft irr/ft soil) (k _{0.15})	Applied Water as %ET	
0.5	1	2.0	0.050	143%	70.0%	0.075	182%	55.0%
0.5	2	4.0	0.025	118%	85.0%	0.038	129%	77.5%
0.5	3	6.0	0.017	111%	90.0%	0.025	118%	85.0%
0.5	4	8.0	0.013	108%	92.5%	0.019	113%	88.8%
0.5	5	10.0	0.010	106%	94.0%	0.015	110%	91.0%
0.5	6	12.0	0.008	105%	95.0%	0.013	108%	92.5%
0.5	7	14.0	0.007	104%	95.7%	0.011	107%	93.6%
0.5	8	16.0	0.006	104%	96.3%	0.009	106%	94.4%
1.0	1	1.0	0.100	250%	40.0%	0.150	1000%	10.0%
1.0	2	2.0	0.050	143%	70.0%	0.075	182%	55.0%
1.0	3	3.0	0.033	125%	80.0%	0.050	143%	70.0%
1.0	4	4.0	0.025	118%	85.0%	0.038	129%	77.5%
1.0	5	5.0	0.020	114%	88.0%	0.030	122%	82.0%
1.0	6	6.0	0.017	111%	90.0%	0.025	118%	85.0%
1.0	7	7.0	0.014	109%	91.4%	0.021	115%	87.1%
1.0	8	8.0	0.013	108%	92.5%	0.019	113%	88.8%

EXAMPLE REQUIREMENTS

DATA: -Average applied water electroconductivity (EC_i) or chloride concentration.

-Average soil saturation extract rootzone EC (EC_e) or soil chloride concentration.

-Rootzone depth: assumed 6 foot for this example.

This example assumes that a roughly steady-state ratio of the average rootzone EC (or Cl) / average applied water EC (or Cl) concentration will result from a given amount of leaching -- basically the same mass balance principle as the above example. The difference here is that Hoffman developed the empirical constant "k" (see chart) from hundreds of before and after soil analyses given a certain depth of leaching (either continuous, flood, or serial applications by sprinkler, but essentially as one leaching event over a short period of time) where the final required leaching is given in terms of depth of water / depth of soil.


This example simply takes this calculated leaching requirement and multiplies it by a 6 foot rootzone to estimate a total leaching depth necessary to maintain the desired rootzone soil EC_e / EC_{irrig} ratio, and final WUE.

The same conditions and caution apply as for Method 1.

METHOD 3: Permissible Concentration Factor (Rhodes, 1982)

Avg ECe Rootzone/ECe Irrig Water

Concentration Factor X	(Rhodes 1982)		Applied Water Needed as %ET	
	LR - Flood	LR - Sprinkler / micro	LR- Flood	LR- High Freq (sprinkler)
5.00	0.02	0.001	102%	100%
4.00	0.03	0.003	103%	100%
3.00	0.05	0.006	105%	101%
2.00	0.09	0.022	110%	102%
1.50	0.15	0.052	118%	106%
1.20	0.23	0.103	129%	111%
1.00	0.31	0.179	145%	122%
0.90	0.37	0.247	159%	133%
0.80	0.45	0.354	182%	155%
0.70	0.57	0.531	231%	213%
0.65	0.64	0.665	280%	299%

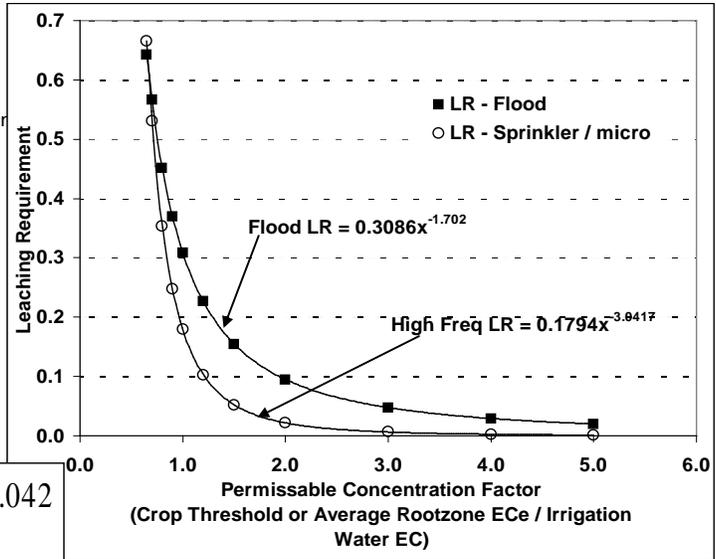

$$LR_{\text{sprinkler / micro}} = 0.179 \left(\frac{ECe}{ECi} \right)^{-3.042}$$

$$FieldWUE = 1 - LR$$

Rhodes, J.D. and J. Loveday. 1990 "Salinity related processes operating in irrigated soil-plant-water systems". Irrigation of Agricultural Crops. Eds B.A. Stewart and D.R. Nielsen. Amer. Soc. Agron., Madison, WI. Monograph No.30:1107-1114

Also in: Ayers, R.S., D.W. Westcot. Water Quality for Agriculture. FAO Irrigation and Drainage Paper 29 Rev. 1, Reprinted 1989, 1994. <http://www.fao.org/DOCREP/003/T0234E/T0234E00.htm>

Original Ref:

Rhoads, J.D. 1982. Reclamation and management of salt-affected soils after drainage. p.123-197. In Proc. 1st Annual Western Provincial Conference Rationalization Water Soil Resources Manage. Lethbridge, Alberta, Canada, November.

EXAMPLES

(Rhodes 1990)

Irrig Water EC (dS/m)	Rootzone ECe (dS/m)	Conc. Factor Avg ECe / Irrig EC	Applied Water			Applied Water		
			LR - Flood	as %ET	Final WUE	LR-Micro / Sprinkler	as %ET	Final WUE
0.5	1	2.0	0.095	110%	90.5%	0.022	102%	97.8%
0.5	2	4.0	0.029	103%	97.1%	0.003	100%	99.7%
0.5	3	6.0	0.015	101%	98.5%	0.001	100%	99.9%
0.5	4	8.0	0.009	101%	99.1%	0.000	100%	100.0%
0.5	5	10.0	0.006	101%	99.4%	0.000	100%	100.0%
0.5	6	12.0	0.004	100%	99.6%	0.000	100%	100.0%
0.5	7	14.0	0.003	100%	99.7%	0.000	100%	100.0%
0.5	8	16.0	0.003	100%	99.7%	0.000	100%	100.0%
1.0	1	1.0	0.309	145%	69.1%	0.179	122%	82.1%
1.0	2	2.0	0.095	110%	90.5%	0.022	102%	97.8%
1.0	3	3.0	0.048	105%	95.2%	0.006	101%	99.4%
1.0	4	4.0	0.029	103%	97.1%	0.003	100%	99.7%
1.0	5	5.0	0.020	102%	98.0%	0.001	100%	99.9%
1.0	6	6.0	0.015	101%	98.5%	0.001	100%	99.9%
1.0	7	7.0	0.011	101%	98.9%	0.000	100%	100.0%
1.0	8	8.0	0.009	101%	99.1%	0.000	100%	100.0%

EXAMPLE REQUIREMENTS: same as Method 1


METHOD 4: Mass Balance only, Kern County Almond Example (Sanden, 2011)


In its simplest form, the leaching fraction (LF) or water percolating below the rootzone can be reduced to a simple mass balance of salt in, salt out:

$$\frac{D_{dw}}{D_{iw}} = \frac{EC_{iw}}{EC_{dw}}$$

Where:
 D_{dw} = depth of drain water below rootzone
 D_{iw} = depth of irrigation water
 EC_{iw} = electroconductivity (or chloride concentration) of irrigation water
 EC_{dw} = electroconductivity (or chloride concentration) of drain water

In this case we take we take the sampling depth having the highest chloride concentration as the limit of the rootzone and use the calculated LF at that depth to estimate field WUE. The below charts reveal changes in soil Cl concentration over 3 years in a 153 acre almond orchard in NW Kern County where we are doing fertility trials and intense monitoring of individual tree water status, soil moisture depletion using the neutron probe and localized field ETc as measured by eddy covariance and surface renewal systems. Cl concentrations are the average of 20 sites, sampled using a single auger hole about 1 foot distant from PVC neutron probe access tubes to a depth of 9 feet over the 51 acre irrigation set for that system (FANJET or microsprinkler, and DOUBLE-LINE DRIP). The Cl concentration in the CA Aqueduct water used for irrigation over the same period averaged 2.2 meq/l.

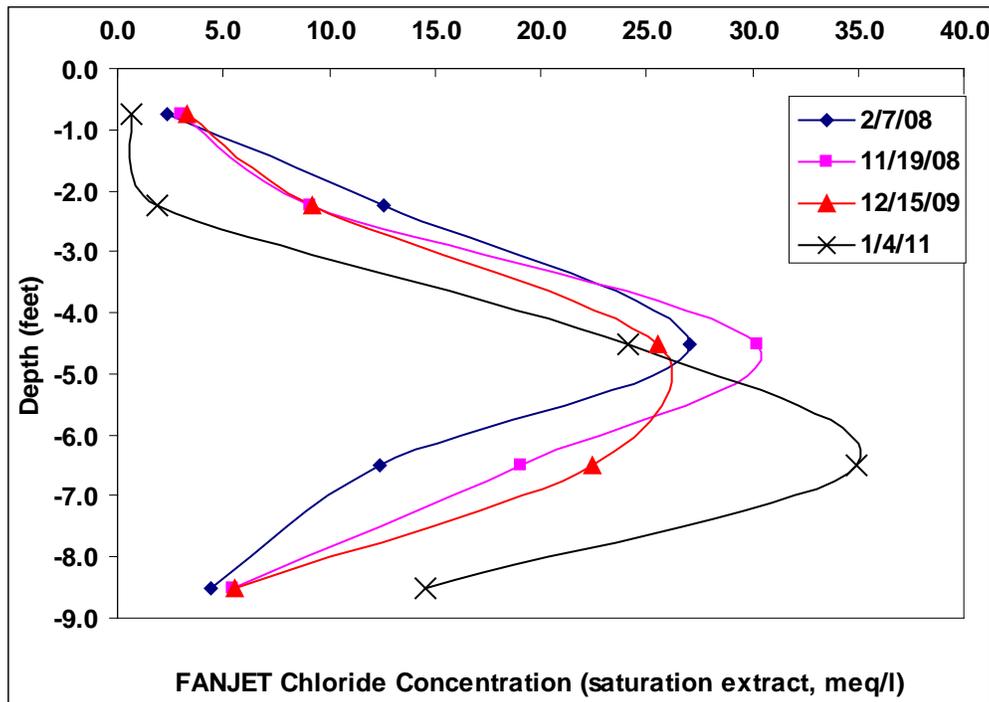

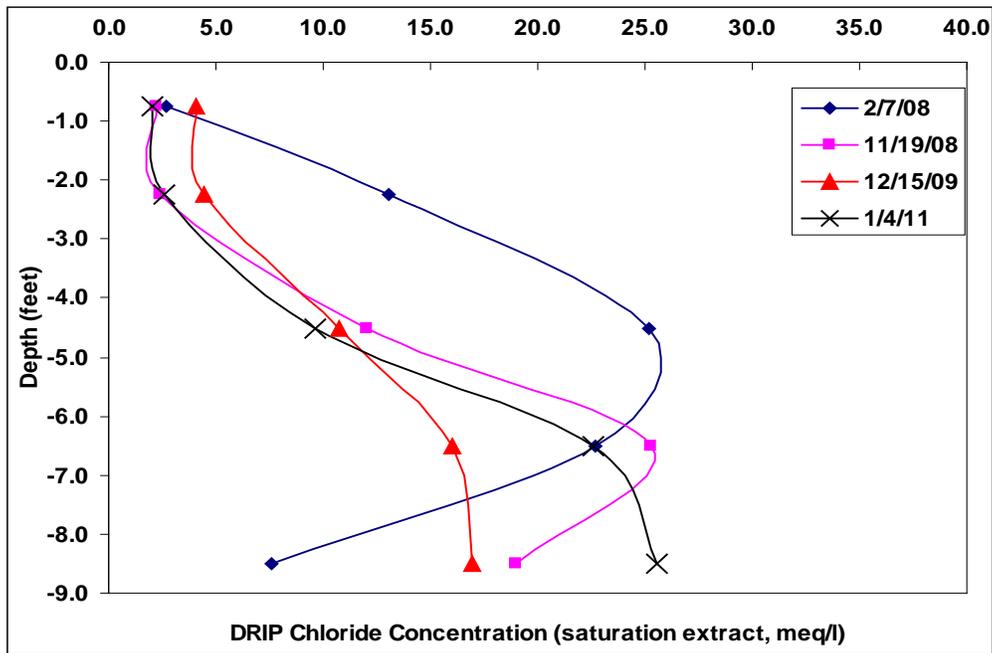

Note how the zone of peak has moved only slightly under FANJET irrigation compared to the DRIP. Sampling in the DRIP has been done within a 1 to 2 foot distance of the DRIP emitters – meaning that this is the zone of maximum leaching. Thus, estimates of deep percolation made solely on a leaching fraction in this zone will over estimate the true depth of leaching for the whole DRIP set. This is partially true for the FANJET also, as it only wets about 50% of the orchard floor and, therefore, has some water that subs laterally, but sampling in the middle of the wetted area (which is our practice) will provide a much higher percentage of water moving straight down as one-dimensional flow then in the DRIP system. This should give a final WUE estimate with less possibility of underestimation.

MICROSPRINKLER -- Cl (soil saturation extract, meq/l)					LEACHING FRACTION ESTIMATE				WATER USE EFFICIENCY			
Sample Depth (ft)	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11
-0.75	2.3	3.0	3.33	0.7	0.48	0.42	0.40	0.77	0.67	0.70	0.72	0.57
-2.25	12.6	9.1	9.17	1.9	0.15	0.19	0.19	0.54	0.87	0.84	0.84	0.65
-4.50	27.0	30.2	25.50	24.1	0.08	0.07	0.08	0.08	0.93	0.94	0.93	0.92
-6.50	12.4	19.1	22.44	34.9	0.15	0.10	0.09	0.06	0.87	0.91	0.92	0.94
-8.50	4.4	5.5	5.56	14.6	0.33	0.29	0.28	0.13	0.75	0.78	0.78	0.88
Avg 0-6.5 feet	13.6	15.4	15.1	15.4	(Average Cl _{irrig} concentration = 2.2 meq/l)				FieldWUE = 1 - LR			

MICROSPRINKLER -- *Cl mass (lb/ac-ft soil @ 29.1 SP)					LF as Cl MASS ESTIMATE				WUE - Cl mass estimate			
Sample Depth (ft)	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11
-0.75	97	126	137	28	0.73	0.56	0.52	2.57	0.58	0.64	0.66	0.28
-2.25	519	375	378	78	0.14	0.19	0.19	0.91	0.88	0.84	0.84	0.52
-4.50	1114	1244	1051	994	0.06	0.06	0.07	0.07	0.94	0.95	0.94	0.93
-6.50	509	786	925	1440	0.14	0.09	0.08	0.05	0.88	0.92	0.93	0.95
-8.50	181	225	229	601	0.39	0.32	0.31	0.12	0.72	0.76	0.76	0.89
(*Cl irrig mass = 70.8 lb/ million lbs water. Applied irrig = 54" = 12.20 million lbs. Total applied Cl = 950 lbs/year.)												

DOUBLE-LINE DRIP -- Cl (soil saturation extract, meq/l)					LEACHING FRACTION ESTIMATE				WATER USE EFFICIENCY			
Sample Depth (ft)	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11	2/7/08	11/19/08	12/15/09	1/4/11
-0.75	2.7	2.2	4.12	2.0	0.45	0.50	0.35	0.52	0.69	0.67	0.74	0.66
-2.25	13.1	2.4	4.44	2.6	0.14	0.48	0.33	0.46	0.87	0.68	0.75	0.69
-4.50	25.2	12.1	10.73	9.6	0.08	0.15	0.17	0.19	0.93	0.87	0.85	0.84
-6.50	22.7	25.3	15.99	22.6	0.09	0.08	0.121	0.09	0.92	0.93	0.892	0.92
-8.50	7.6	19.0	16.91	25.5	0.22	0.10	0.115	0.08	0.82	0.91	0.897	0.93
Avg 0-6.5 feet	15.9	10.5	8.8	9.2								

The above table illustrates this concept in that MICROSPRINKLER WUE is estimated at 94 to 95% over the 3 years, while the DRIP WUE is estimated at 90 to 93%. Using EC mass balance, with its subsequent complications of precipitation and dissolution in this marginally alkaline soil indicated an even higher LF – lowering estimates of MICROSPRINKLER WUE down to 89 to 92% and DRIP WUE from 88 to 90%.

Detailed measurements of heat flux and subsequent estimation of site specific full year ET_c by eddy covariance put the yearly 2009-10 average ET for this block (system installed March 2008 so full season not available that year) at 58.2 inches – almost exactly equal to applied irrigation and rainfall. This would yield a 100% field WUE! Average ET_c estimated from site specific measured applied water and neutron probe depletion averaged 57.6 and 56.1 inches for the DRIP and MICROSPRINKLER, respectively. Using currently published K_c's for micro irrigated almonds and an ET of 45 inches would have yielded a field WUE of only 77%.

The earlier discussed empirical models, using an average MICROSPRINKLER rootzone Cl concentration of 15 meq/l and irrigation Cl of 2.2 meq/l would have yielded field WUE estimates of 97, 91.2 and 99.7% for Methods 1, 2 and 3, respectively. Inclusion of Cl actually taken up by the crop and exported off the field will further improve the accuracy and magnitude of field WUE. This was the approach taken by Samani, et. al. (2005) in developing field level WUE estimates for several major crops for the Elephant Butte Irrigation District in southern New Mexico.

(Samani, Z., T. Sammis, R. Skaggs, N. Alkhatiri, and J. Deras. 2005. Measuring on-farm irrigation efficiency with chloride tracing under deficit irrigation. J. Irrig. & Drain. Eng., Vol. 131:6:555-559.)

CONCLUSION

A chloride mass balance approach provides a mechanism for calculating specific field level deep percolation (and subsequent WUE if runoff and other losses are negligible) with greater certainty than using estimates of crop ET_c. That said, on a district wide basis this method requires extensive work to obtain samples for all fields and, therefore, is most likely more suited to be used as an “indicator” methodology to verify the accuracy of larger scale estimates of ET_c made using CIMS, SEBAL, MODIS or other regional predictors for representative fields within a district or basin.

Sincerely,



Blake Sanden
Irrigation & Agronomy Advisor

(The following is a comment from Bob Siegfried on spatial uncertainties within a field and potential errors in using the Cl tracer technique.)

From: Robert Siegfried [mailto:rsiegfried@valleywater.org]

Sent: Monday, November 28, 2011 4:12 PM

To: Agriculture Water Use Efficiency **Cc:** Jemaa, Fethi Ben

Subject: chloride balance

AgWUE:

It is instructive to see confirmation in Blake Sanden's note of 10/31/11 to AgWUE of substantial deviations of ET_c's from the ideal ET_c's estimated by the two-step K_c*ET_o method.

The applicability of the formulas contained in that note for calculating the leaching requirement, reclamation, and permissible concentration factors (Methods 1, 2 and 3, respectively) may be questioned. Further explanation of how leaching requirement calculations derived from water quality parameters (seemingly meant to be guides to estimating amounts of irrigation required beyond ETc's rather than to be estimates of the efficacy of the applied leaching fraction) are relevant to field specific conditions would be helpful. Presently, their applicability appears to be in estimating a baseline leaching requirement from irrigation water quality. Sampling problems arise when drainage water EC or chloride concentration is required. The sampling issue is not addressed in these three methods.

The site specific example of Method 4 involving two irrigation systems and based on twenty sites per system spanning 51 acres would have been more informative had standard deviations and coefficients of variation been supplied. The appended paper Zohrab Samani et al., "Measuring On-farm Irrigation Efficiency with Chloride Tracing under Deficit Irrigation" J. Irrigation and Drainage Engineering 131:555-559, also lacks information on the variability of the authors' chloride samples. These are not fatal flaws, but a cautionary note is required. We do not know the eventual uses to which the report on the quantification of agricultural water use efficiency will be put. I refer AgWUE to

Biggar, J.W. and D.R. Nielsen (1976) "Spatial Variability of the Leaching Characteristics of a Field Soil", Water Resources Research 12:78-84

, for estimates of sample sizes required for several confidence levels. If the methods of Blake's note are incorporated in the report, a comment on the significant uncertainties of these methods should be included.

Regards,
Bob Siegfried
Santa Clara Valley Water District
5750 Almaden Expressway
San Jose CA 95118
408 265 2607