

DRAFT
Technical Information
for Preparing Water Transfers in
2012 Transfer Proposals

Information to Parties Interested In Making Water
Available for 2012 Water Transfers

FEBRUARY 2012

February 2013

Prepared By:
CALIFORNIA DEPARTMENT OF WATER RESOURCES

AND

RESOURCES MANAGEMENT DIVISION
BUREAU OF RECLAMATION, MID-PACIFIC REGION



|

|

Table of Contents

Page

SECTION 1. GENERAL INFORMATION FOR WATER TRANSFERS IN 2012	1
1.1 INTRODUCTION	1
1.2 RISKS AND CONSTRAINTS	2
1.3 PROJECT REVIEW	3
1.4 DEVELOPING A WATER TRANSFER PROPOSAL	3
1.5 ENVIRONMENTAL DOCUMENTATION	4
1.6 COST REIMBURSEMENT	6
1.7 CONTACTS	6
SECTION 2. WATER TRANSFERS BASED ON CROPLAND IDLING AND CROP SHIFTING	7
2.1 ESTIMATION OF CONDITIONS THAT WOULD OCCUR ABSENT THE TRANSFER	9
2.1.1 Large Water Districts	10
2.1.2 Individual Farm Operations and Small Water Districts	11
2.2 USE OF EVAPOTRANSPIRATION OF APPLIED WATER (ETAW)	11
2.2.1 What is ETAW?	11
2.2.2 Crops Allowed for Cropland Idling or Shifting and ETAW Values	12
2.2.3 Rice Idling	14
2.2.4 Rice Straw Decomposition	14
2.2.5 Limitations on Crops and Lands	14
2.3 ESTIMATING WATER AVAILABLE FOR TRANSFER	16
2.3.1 Large Water Districts	16
2.3.2 Individual Farm Operations or Small Water Districts	16
2.4 POTENTIAL CROPLAND IDLING/CROP SHIFTING TRANSFERS IN THE DELTA/YOLO BYPASS REGION	16
2.5 LIMITATIONS ON WATER MADE AVAILABLE FOR TRANSFER	17
2.6 ADJUSTMENTS FOR WATER SHORTAGE YEARS	17
2.7 REPORTING	18
2.7.1 Acreage Calculation Methodology	18
2.7.2 Monitoring and Verification	18
2.8 THIRD-PARTY EFFECTS	19
SECTION 3. WATER TRANSFERS BASED ON GROUNDWATER SUBSTITUTION	21
3.1 COMPLIANCE WITH LOCAL GROUNDWATER MANAGEMENT PLANS AND ORDINANCES	23
3.2 EVALUATION OF GROUNDWATER SUBSTITUTION TRANSFER PROPOSALS	24
3.3 GROUNDWATER SUBSTITUTION WELLS	25
3.3.1 Information Requirements for Water Transfer Wells	25
3.4 DETERMINING THE AMOUNT OF TRANSFERABLE WATER	26
3.4.1 Determining the Baseline Groundwater Pumping	27
3.4.2 Measuring Groundwater Pumped	28
3.4.3 Estimating the Effects of Transfer Operations on Stream Flow	29
3.5 MONITORING PROGRAM	29
3.5.1 Monitoring Plan Objectives	30
3.5.2 Monitoring Program Elements	30
3.6 MITIGATION PROGRAM	33
3.6.1 Objectives	33

3.6.2 Mitigation Plan Elements 33

SECTION 4. RESERVOIR STORAGE RELEASE 35

4.1 REFILL CRITERIA 35

APPENDIX A. POTENTIAL WATER TRANSFER EFFECTS ON THE PROJECTS 37

APPENDIX B. RICE CROPLAND IDLING PROGRAM SECTION 1. GENERAL INFORMATION FOR WATER TRANSFERS 1

- 1.1 INTRODUCTION 1
- 1.2 RISKS AND CONSTRAINTS 4
- 1.3 PROPOSAL REVIEW 5
- 1.4 DEVELOPING A WATER TRANSFER PROPOSAL 6
- 1.5 ENVIRONMENTAL DOCUMENTATION 6
- 1.6 COST REIMBURSEMENT 9
- 1.7 CONTACTS 9

SECTION 2. WATER TRANSFERS BASED ON CROPLAND IDLING AND CROP SHIFTING 10

- 2.1 ESTIMATION OF CONDITIONS THAT WOULD OCCUR ABSENT THE TRANSFER 13
 - 2.1.1 Large Water Districts 14
 - 2.1.2 Individual Farm Operations and Small Water Districts 15
 - 2.1.3 Eligibility of Double-Cropped Fields 15
- 2.2 USE OF EVAPOTRANSPIRATION OF APPLIED WATER (ETAW) 16
 - 2.2.1 What is ETAW? 16
 - 2.2.2 Crops Allowed for Cropland Idling or Shifting and ETAW Values 16
 - 2.2.3 Rice Idling 18
 - 2.2.4 Rice Straw Decomposition 18
 - 2.2.5 Limitations on Crops and Lands 18
 - 2.2.6 Vegetation Control on Idled Land 20
- 2.3 ESTIMATING WATER AVAILABLE FOR TRANSFER 22
 - 2.3.1 Large Water Districts 22
 - 2.3.2 Individual Farm Operations or Small Water Districts 22
- 2.4 POTENTIAL CROPLAND IDLING/CROP SHIFTING TRANSFERS IN THE DELTA/YOLO BYPASS REGION 22
- 2.5 LIMITATIONS ON WATER MADE AVAILABLE FOR TRANSFER 23
- 2.6 ADJUSTMENTS FOR WATER SHORTAGE YEARS 23
- 2.7 REPORTING 24
 - 2.7.1 Acreage Calculation Methodology 24
 - 2.7.2 Monitoring and Verification 24
- 2.8 THIRD-PARTY EFFECTS 25
- 2.9 ENVIRONMENTAL CONSIDERATIONS 26
 - 2.9.1 DWR Considerations for Rice Land Idling Transfers 26
 - 2.9.2 Reclamation’s ESA Considerations for Rice Land Idling Transfers 28

SECTION 3. WATER TRANSFERS BASED ON GROUNDWATER SUBSTITUTION 29

- 3.1 COMPLIANCE WITH LOCAL GROUNDWATER MANAGEMENT PLANS AND ORDINANCES 32
- 3.2 EVALUATION OF GROUNDWATER SUBSTITUTION TRANSFER PROPOSALS 33
- 3.3 GROUNDWATER SUBSTITUTION WELLS 34
 - 3.3.1 Information Requirements for Groundwater Substitution Wells 34
- 3.4 DETERMINING THE AMOUNT OF TRANSFERABLE WATER 36
 - 3.4.1 Determining the Baseline Groundwater Pumping 36
 - 3.4.2 Measuring Groundwater Pumped 37

3.4.3 Estimating the Effects of Transfer Operations on Streamflow 38
3.5 MONITORING PROGRAM 39
3.5.1 Monitoring Plan Objectives 40
3.5.2 Monitoring Program Elements 41
3.6 MITIGATION PROGRAM..... 44
3.6.1 Objectives 44
3.6.2 Mitigation Plan Elements 45
SECTION 4. RESERVOIR STORAGE RELEASE.....46
4.1 REFILL CRITERIA 46
APPENDIX A. POTENTIAL WATER TRANSFER EFFECTS ON THE PROJECTS.....48
APPENDIX B. WELL ACCEPTANCE CRITERIA.....49

~~CONSERVATION MEASURES FROM
 THE GIANT GARTER SNAKE 2010/2011 RECLAMATION WATER TRANSFER
 PROGRAM BIOLOGICAL OPINION 38
 APPENDIX C. WELL ACCEPTANCE CRITERIA 40~~

List of Tables

~~TABLE 1-1 TRANSFERS CONSIDERED FOR 20124~~
~~TABLE 2-1 ESTIMATED ETAW VALUES (IN ACRE- FEET/ACRE) FOR CROPS SUITABLE FOR SHIFTING IN 2012
17~~
~~TABLE 2-2 ESTIMATED ETAW VALUES (IN ACRE- FEET/ACRE) FOR CROPS SUITABLE FOR IDLING IN 2012
17~~
~~TABLE 2-3 CROPS NOT SUITABLE FOR SHIFTING OR IDLING IN 201220~~
~~TABLE 3-1 DESCRIPTION OF COUNTY ORDINANCES AND PLANS PERTAINING TO GROUNDWATER TRANSFERS
32~~
~~TABLE C-1 WELL ACCEPTANCE CRITERIA51~~
TABLE 1-1 TRANSFERS CONSIDERED FOR 2013 4
TABLE 2-1 ESTIMATED ETAW VALUES (IN ACRE- FEET/ACRE) FOR CROPS SUITABLE FOR SHIFTING 17
TABLE 2-2 ESTIMATED ETAW VALUES (IN ACRE- FEET/ACRE) FOR CROPS SUITABLE FOR IDLING 17
TABLE 2-3 CROPS NOT SUITABLE FOR SHIFTING OR IDLING 20
TABLE 3-1 DESCRIPTION OF COUNTY ORDINANCES RELATED TO GROUNDWATER TRANSFERS..... 32
TABLE B-1 WELL ACCEPTANCE CRITERIA 49

List of Figures

~~FIGURE 1-1 WATER TRANSFER PROCESS FLOWCHART 8~~
~~FIGURE 2-1 CROPLAND IDLING/CROP SHIFTING TRANSFERS PROCESS FLOW CHART 12~~
~~FIGURE 2-2 CROP IDLING TECHNICAL INFORMATION SUBMITTAL PROPOSAL CHECKLIST13~~
~~FIGURE 3-1 GROUNDWATER SUBSTITUTION TRANSFERS TECHNICAL INFORMATION — PROPOSAL CHECKLIST
31~~
FIGURE 1-1 WATER TRANSFER PROCESS FLOWCHART..... 8
FIGURE 2-1 CROPLAND IDLING/CROP SHIFTING TRANSFERS PROCESS FLOW CHART 12
FIGURE 2-2 CROP IDLING TECHNICAL INFORMATION SUBMITTAL PROPOSAL CHECKLIST 13
FIGURE 3-1 GROUNDWATER SUBSTITUTION TRANSFER TECHNICAL INFORMATION — PROPOSAL CHECKLIST.. 31

List of Acronyms and Abbreviations

μS/cm	micro Siemens/centimeter
af	acre-feet
bgs	below ground surface
BMPs	best management practices
CEQA	California Environmental Quality Act
CESA	California Endangered Species Act
CDFW	California Department of Fish and Wildlife
COA	Coordinated Operating Agreement
CVP	Central Valley Project
CVPIA	Central Valley Project Improvement Act
D-1641	State Water Resources Control Board Decision 1641
Delta	Sacramento-San Joaquin River Delta
DWR	California Department of Water Resources
ESAFESA	Federal Endangered Species Act
ETAW	evapotranspiration of applied water
GIS	geographic information system
GPS	global positioning system
NAD83 NAD	North American Datum 1983
NEPA	National Environmental Policy Act
NMFS	National Marine Fisheries Service
PG&E	Pacific Gas and Electric
POC	point of contact
Projects	Central Valley Project and State Water Project
Project Agencies	California Department of Water Resources and Bureau of Reclamation, Mid-Pacific Region
Reclamation	Bureau of Reclamation, Mid-Pacific Region
SDF	streamflow depletion factor
SWP	State Water Project
SWRCB	State Water Resources Control Board
TDS	total dissolved solids
USFWS	U.S. Fish and Wildlife Service

Section 1. General Information for Water Transfers ~~in 2012~~

1.1 Introduction

The California Department of Water Resources (DWR) and Bureau of Reclamation, Mid-Pacific Region (Reclamation), referred to collectively as Project Agencies, prepared this technical information to help facilitate ~~water transfers in 2012 and to optimize the beneficial uses of the State's water resources. This technical information is applicable to all 2012 transfers involving State and federal water contractors, non-project water users, and use of Project (Central Valley Project [CVP] and State Water Project [SWP]) facilities for transfers through the Sacramento-San Joaquin River Delta (Delta). This technical information does not have a regulatory effect, but if followed, will make review of the transfer proposal by the Project Agencies more efficient. Project Agencies will review each water transfer proposal according to the facts provided by the water transfer proponents, and with a view to the proposal's adequacy in addressing the technical information provided herein. Project Agencies may need to refine the information provided in this technical document if new facts arise or new regulatory restrictions develop (see, for example, section 1.2).~~temporary water transfers (duration of up to 1 year) in 2013 that require conveyance through Project Agencies' facilities or otherwise require Project Agency approval.

~~The criteria contained in this document were developed consistent with provisions of the California Water Code and Central Valley Project Improvement Act (CVPIA) intended to protect against injury to others not a party to the water transfer. Three fundamental principles the Project Agencies consider when evaluating potential impacts of a transfer proposal are: (1) no injury to other legal users of water, including the Projects; (2) no unreasonable effects on fish, wildlife or other instream beneficial uses of water; and (3) no unreasonable effects on the overall economy or the environment in the counties from which the water is transferred. The Project Agencies will not consider any water transfer for which these basic principles have not been adequately addressed.~~

~~The information provided in this document is intended to support implementation of water transfers, while protecting the rights of all legal users of water, the environment, and the economy. The requested information is necessary to assess the amount of water that can be made available, the timing, and the quantities that can be exported. Each water transfer proposal is unique, and there may be site-specific conditions not accounted for in this *Draft Technical Information Document for Water Transfers in 2012*. The Project Agencies may need additional information for a particular proposal in order to evaluate the water transfer proposal's adequacy in addressing the technical information.~~

Table 1-1 identifies transfers that the Project Agencies will and will not consider in 2012.

While the technical information contained in this document may be used to inform the development of longer-term transfer proposals, multi-year or long-term transfers typically require the transfer proponents to provide a more rigorous analysis than that requested for temporary transfers, and the Project Agencies may require additional information beyond that specified in this document. The Project Agencies evaluate each transfer on a case-by-case basis considering the specific conditions for each individual transfer.

Any transfer of non-project water requiring conveyance through Project Agencies' facilities will require a "conveyance agreement" or a "letter agreement" with the water transfer proponent, the buyer, and either DWR or Reclamation. Water transfer proponents who provide the technical information requested in this document will help Project Agencies review transfer proposals and develop their respective "conveyance contracts" or "letters of agreement." Project Agencies will review each water transfer proposal using the information provided by the water transfer proponents and other available information.

The basis upon which transfer approval is made by the Project Agencies and to which the information in this technical document relates are principally Project Agency water rights, Project Agency water supply, water service and/or repayment contracts, Section 3405(a) of the Central Valley Project Improvement Act (CVPIA), Water Code Section 1810, the Coordinated Operating Agreement (COA)¹, and other State Water Project (SWP) contracts. Other legal requirements, such as the National Environmental Policy Act (NEPA) and the California Environmental Quality Act

(CEQA) may also apply to water transfers; however, their internal requirements are not addressed by this technical document.²

The approval criterion to which the information in this document chiefly pertains is the avoidance of legal injury, through the determination of whether the water proposed for transfer is legally transferable. Much of the information required in this document is necessary for the Project Agencies to determine if the proposed transfer would cause legal injury to downstream water users. This determination, frequently referred to as a "real water determination," is the net addition of water to the downstream system that would not be available but for the transferor's concurrent

¹ This an agreement between the United States of America and the State of California for coordinated operations of the Central Valley Project and the State Water Project. This agreement is known as the Coordinated Operating Agreement (COA).

² Short-term transfers of post-1914 appropriative water rights require approval by the SWRCB under Water Code Section 1725 et seq. The approval criteria are virtually identical to those in Section 1810, so the information gathered here should also be helpful to transferring parties in that approval process.

reduction of his own consumptive use of that water. Only that portion of the proposed transfer that is determined to represent real water is transferrable. Depending on the measures used to make water available for transfer, real water consists primarily of the transferor's reduction in the evapotranspiration of applied water (ETAW), reduction in applied water lost to saline sinks or to other unusable sources, or increased releases from storage reservoirs. The amount of real water savings is the amount of water under the transferor's right that can be transferred from the system without injuring other users. As the above discussion demonstrates, real water determinations and legal injury determinations are essentially interchangeable terms.³

Real water determinations by the Project Agencies are required, in the first instance, to protect their own water rights from infringement. The Project Agencies are the last diverters in the Sacramento-San Joaquin river system. They have shared responsibility for meeting Sacramento-San Joaquin River Delta (Delta) water quality and environmental requirements, and their water rights are junior to all lawful in-basin water diversions of natural flow under the watershed protection statutes. To the extent that water other than real water is transferred out of the system when the Delta is in balanced conditions — i.e., when Project operations are ensuring that Delta regulatory requirements are being met — it is water that is unlawfully taken from Project supply (see Appendix A).

Real water determinations are also needed to satisfy the legal criteria under Water Code Section 1810(d) that require the owner of conveyance facilities to ensure that the transfer will not cause legal injury to other water users; and to satisfy requirements for water accounting under the COA between DWR and Reclamation when one of the Projects either conducts or facilitates a water transfer — again, to ensure no legal injury. Real water criteria are also used by DWR for the same purpose in reviewing and approving transfers under specific provisions of its various water rights settlement agreements.

A second set of approval criteria relate to the other two Section 1810(d) legal requirements: that the transfer result in (1) no unreasonable impacts on fish and wildlife and instream uses, and (2) no unreasonable economic or environmental impact on the area in which the transfer water originates.⁴

Although this document seeks to identify in the best and most complete way possible the information needed for transfer approval, to both expedite that approval and to

³ Real water determinations and legal injury from water transfers are further discussed in the article located on the DWR Water Transfer website, "Approving Water Transfers: Assuring Responsible Transfers." http://www.water.ca.gov/watertransfers/docs/responsible_water_transfers_2012.pdf

⁴ To support the finding required under Water Code Section 1810(d) of no reasonable impact on fish and wildlife, DWR has required that measures patterned upon the Conservation Measures developed by the U.S. Fish and Wildlife Service for the giant garter snake under its most recent consultation with the Reclamation on water transfers be included in transfer proposals seeking to use State Water Project (SWP) conveyance facilities.

reduce participant uncertainty, each transfer is unique and must be considered on its individual factual merits, using all the information that is available at the time of transfer approval and execution of the conveyance or letter of agreement with the respective Project Agency in accordance with the applicable legal requirements. This document does not pre-determine those needs or those facts and does not foreclose the requirement and consideration of additional information. The general types of transfers that will be considered for proposals requiring the use of Project facilities are listed in Table 1-1.

Table 1-1 Transfers considered for 20122013

Transfers considered in <u>20122013</u>	Transfers not considered in <u>20122013</u>
<p>Stored water — Release of stored water that would remain in storage in the absence of the water transfer. Storage reduction caused by a transfer must be refilled at a time when downstream users would not have otherwise captured the water.</p>	<p>Direct pumping of groundwater — The Project Agencies will not approve the direct transfer of groundwater from one area to another. Water Code Section 1220 establishes significant barriers to the export of groundwater outside the Sacramento Delta-Central Sierra Basins.</p>
<p>Cropland idling/crop shifting — Reduction in surface water use resulting from reduced ETAW¹ of agricultural crops that would have been planted in the absence of the water transfer (see Section 2).</p>	<p>Transfers that injure legal users of water or cause unreasonable effects on the environment — Water transfers that simply reclassify existing stream flows from one category to another, making these flows no longer available to historic downstream users, have the potential to injure other legal users of water and cause harm to the environment.</p>
<p>Groundwater substitution — Reduction in surface water use that is offset with additional groundwater pumping (see Section 3).</p>	

⁺ ETAW = evapotranspiration of applied water.

¹ ETAW = evapotranspiration of applied water.

1.2 Risks and Constraints

Buyers and sellers should be aware of the uncertainty and risk associated with water transfers. The Project Agencies cannot guarantee that a particular transfer will be successful even with adequate planning, regulatory approval, and monitoring due to the uncertainties related to California's hydrologic conditions ~~and~~, regulatory restrictions on Project Agencies' operations, ~~and the availability of Project Agencies' facilities.~~ As the hydrology gets wetter, there is typically less available ~~export~~ capacity to ~~move~~export transfer water through the Delta. Buyers and sellers located in the Delta or the Yolo Bypass should contact ~~DWR~~the Project Agencies for specific risks that may affect their transfer proposal.

Project Agencies' operations are governed by ~~the criteria contained in a number of regulatory restrictions, including~~ State Water Resources Control Board (SWRCB) Decision 1641 (D-1641) ~~and all other regulatory restrictions governing SWP and CVP operations. These include criteria contained in~~, the 2008 U.S. Fish and Wildlife

Service (USFWS) ~~Biological Opinion~~[biological opinion](#) for the coordinated operations of the [Central Valley Project \(CVP\)](#) and [State Water Project \(SWP\)](#) and its effects on the listed Delta smelt, and ~~the~~ 2009 National Marine Fisheries Service (NMFS) ~~Biological Opinion~~[biological opinion](#) for the coordinated operations of the CVP and SWP and its effects on listed anadromous fish and marine mammals. ~~These restrictions in the early winter to spring months result in the Projects maximizing their exports during the July through September period. The current regulatory restriction limiting~~ Current federal Endangered Species Act (ESA) consultations for export of transfer water through ~~Project facilities to~~[Banks and Jones Pumping Plants covers](#) the period of July through September, ~~and transfers will be limited to this interval. Limitations on CVP and SWP Delta operations in the early winter and spring months often result in the need to maximize Project exports during July through September, which~~ can further limit the available export capacity for water transfers. The ~~buyers and sellers~~[water transfer proponents](#) assume the risk that all, or a portion of, the water made available from the water transfer cannot be exported and may be lost.

[Generally, CVP power will not be provided for transfers of non-project water utilizing CVP facilities. The parties are required to provide any energy required to convey non-project water through CVP facilities or replace the value of the energy used to store and/or convey the non-project water.](#)

1.3 [Project Proposal](#) Review

Figure 1-1 outlines the process for determining which agencies have review authority over the water transfer [proposal](#). The Project Agencies work cooperatively to review water transfers requiring ~~the use of Project~~[conveyance through SWP or CVP](#) facilities. ~~In addition to requirements listed in Figure 1-1, DWR requires the transferor to complete any required California Environmental Quality Act (CEQA) documentation and obtain all necessary California Endangered Species Act (CESA) and federal Endangered Species Act (ESA) compliance, in order to consider the water transfer proposals.~~

~~DWR must consent to water~~[Water](#) transfers involving SWP facilities or SWP water supplies: ~~are subject to DWR's consent.~~ Reclamation has approval authority over water transfers involving CVP water supplies. [DWR and Reclamation must coordinate their accounting and operations for any transfer that involves use of Banks Pumping Plant or Jones Pumping Plant.](#) Public Law 102-575, the CVPIA, Section 3405(a) outlines the conditions under which CVP water may be transferred. Reclamation has developed interim implementing guidelines for the water transfer provisions of the CVPIA. These interim guidelines can be found at http://www.usbr.gov/mp/cvpia/3405a/docs/int_guide_imp_water_trans.pdf.

Depending on the ~~type~~[nature](#) of ~~the~~ water right ~~held by~~, the seller, ~~may be required to file~~ a petition ~~to for change with~~ the SWRCB ~~for temporary transfer may be needed.~~ Individual water right holders are responsible for obtaining changes to water rights

from the SWRCB as needed. If a transfer requires SWRCB approval, the [seller/water transfer proponent](#) should submit a petition for change to the SWRCB as soon as possible. SWRCB approval must be obtained before any water can be transferred.

1.4 Developing a Water Transfer Proposal

[Parties/Water transfer proponents](#) are encouraged to work with local water agencies and districts to develop coordinated water transfer proposals capable of providing substantial quantities of water. The following should be considered in developing a water transfer proposal [requiring conveyance through SWP or CVP facilities](#):


- The types of water transfers that the Project [agencies/Agencies](#) will consider in ~~2012~~2013 are shown in Table 1-1. [The water transfer proponents should ensure that the transfer proposal is described in sufficient detail to allow for proper review by the Project Agencies, California Department of Fish and Wildlife \(CDFW\), USFWS, and NMFS, as appropriate.](#)
- The agencies that may need to be consulted are shown in Figure 1-1.
- The amount of water made available for transfer by the seller is usually determined at the most downstream point of control of the [seller/water transfer proponent](#). Losses beyond this point, including Delta carriage water losses and conveyance losses, affect the total amount of transfer water delivered and are determined by the Project Agencies.
- Proposals, contract negotiations, and CEQA/~~National Environmental Policy Act (NEPA)~~[NEPA](#) documentation (if required) must be completed before the water can be transferred. Water transfers involving CVP water supplies or CVP facilities (or both) require the approval of Reclamation, and water transfers ~~using~~[involving](#) SWP water supplies or facilities (or both) require the approval of DWR.
- If SWRCB approval is required, sellers should obtain this approval as soon as possible.

1.5 Environmental Documentation

~~For 2012, sellers~~[In addition to requirements listed in Figure 1-1, for 2013, water transfer proponents](#) must complete ~~appropriate~~[any required](#) CEQA documentation ~~or equivalent process (i.e., SWRCB approval for temporary transfers)~~ and obtain all necessary [California Endangered Species Act \(CESA\)](#) and [federal](#) ESA compliance, ~~and any other regulatory approval~~ for transfers related to State actions. [Temporary transfers \(one year duration or less\) based on post-1914 appropriative water rights are required to obtain SWRCB approval consistent with the requirements of Water Code Section 1725 et seq.](#) For transfers requiring Reclamation approval, NEPA documentation [and ESA compliance](#) for through-Delta transfers is required. [Reclamation will need to complete additional environmental analysis and](#)


[documentation prior to providing contractual approvals for the transferred water to be conveyed in federal facilities to the appropriate turnouts of the identified water users.](#)

Which Agency's Water Transfer Process?

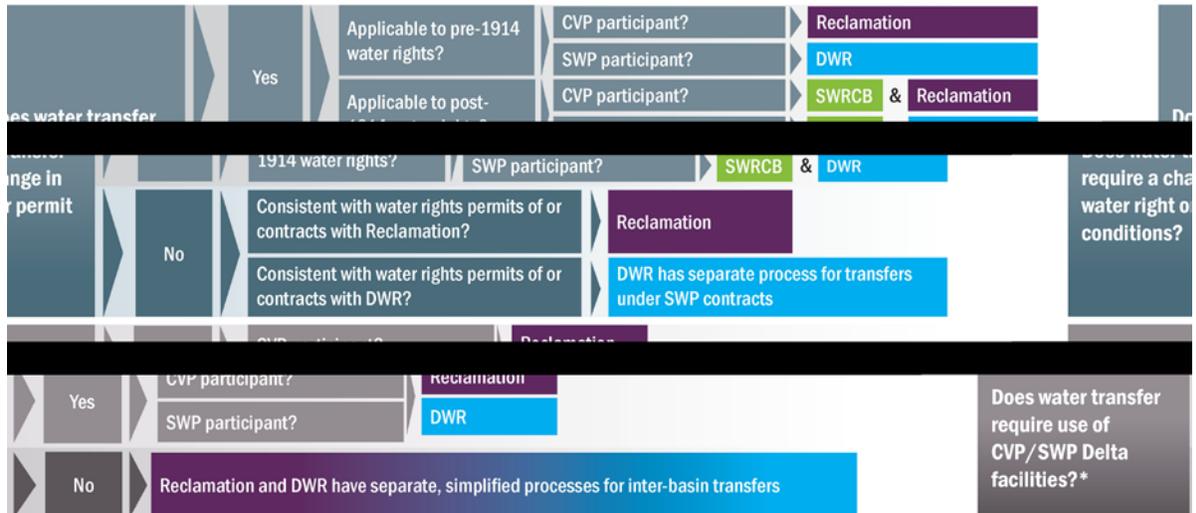

Work cooperatively to approve all transfers that use SWP/CVP facilities

*DWR and Reclamation work cooperatively to approve all transfers that use SWP/CVP facilities

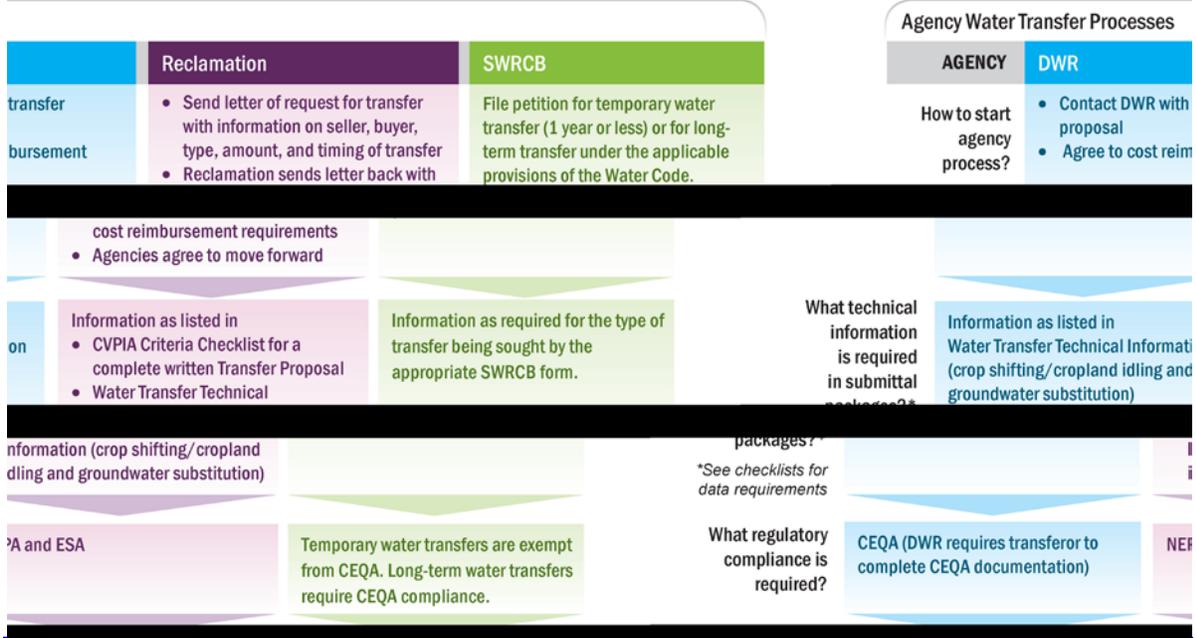

Which Agency's Water Transfer Process?

Does water transfer require a change in water right or permit conditions?	Yes	Applicable to pre-1914 water rights?	CVP participant?	Reclamation
			SWP participant?	DWR
	Applicable to post-1914 water rights?	CVP participant?	SWRCB & Reclamation	
		SWP participant?	SWRCB & DWR	
No	Consistent with water rights permits of or contracts with Reclamation?		Reclamation	
	Consistent with water rights permits of or contracts with DWR?		DWR has separate processes for transfers under SWP contracts	
Does water transfer require use of CVP/SWP Delta facilities?*	Yes	CVP participant?	Reclamation	
		SWP participant?	DWR	
No	Reclamation and DWR have separate, simplified processes for inter-basin transfers			

* DWR and Reclamation work cooperatively to approve all transfers that use SWP/CVP facilities

Agency Water Transfer Processes

AGENCY	DWR	Reclamation	SWRCB
How to start agency process?	<ul style="list-style-type: none"> Contact DWR with transfer proposal and request conveyance through SWP Agree to cost reimbursement 	<ul style="list-style-type: none"> Send letter of request for transfer with information on seller, buyer, type, amount, and timing of transfer Reclamation sends letter back with cost reimbursement requirements Agencies agree to move forward 	File petition for temporary water transfer (1 year or less) or for long-term transfer under the applicable provisions of the Water Code.
What technical information is required in submittal packages?*	Information as listed in Water Transfer Technical Information (crop shifting/cropland idling and groundwater substitution)	<ul style="list-style-type: none"> Information as listed in CVPIA Criteria Checklist for a complete written Transfer Proposals Water Transfer Technical Information (crop shifting/cropland idling and groundwater substitution) 	Information as required for the type of transfer being sought by the appropriate SWRCB form.
<small>*See checklists for data requirements</small>			
What regulatory compliance is required?	CEQA, ESA, CESA, local and regional requirements, depending on the location of the proposed transfer	NEPA and ESA	Approval of Petition for Change for transfer of post 1914 appropriative water right.
What is acceptance of transfer proposals based on?	<ul style="list-style-type: none"> Complete Submittal Package Determination of real water and Project operation considerations Water Code Section 1810 - use of a water conveyance facility is to be made without injuring any legal user of water and without unreasonably affecting fish, wildlife, or other instream beneficial uses; the overall economy; or the environment of the transferor area CEQA 	<ul style="list-style-type: none"> Complete Submittal Package Determination of real water and Project operation considerations CVPIA section 3405(a) – No adverse impacts on CVP contractors, water supply or operations, fish and wildlife obligations, and groundwater conditions in the transferor area NEPA 	Transfer shall not injure any legal user of the water and not unreasonably affect fish, wildlife, or other instream beneficial uses.

Figure 1-1 Water transfer process flowchart

1.6 Cost Reimbursement

~~The buyer or seller will be required~~Project Agencies will require water transfer proponents to reimburse the costs incurred by the Project Agencies to review and approve the transfer proposal, and administer ~~the~~their respective water transfer “conveyance contract” or “letter of agreement.” These costs will vary depending on the size and complexity of the transfer proposed.

1.7 Contacts

Parties with general questions on water transfers may contact:

Tom Filler
Chief, Water Transfer Program
DWR (916) 653-5272
TFiller@water.ca.gov~~TFiller@water.ca.gov~~

Brad Hubbard
Program Manager
Reclamation (916) 978-5204
BHubbard@usbr.gov

Parties interested in developing water transfer proposals that ~~may~~ require use of ~~conveyance through~~ SWP facilities may contact:

Nancy Quan
Chief, Program Development and Water Supply Branch
DWR (916) 653-0190
nquan@water.ca.gov

Section 2. Water Transfers Based on Cropland Idling and Crop Shifting

This section provides ~~technical a discussion of the~~ information ~~on water made available~~ needed by DWR and Reclamation for ~~the review of~~ transfer ~~by proposals based on~~ cropland idling/crop shifting ~~that require conveyance through SWP or CVP facilities~~. Cropland idling includes the idling of land that would have been planted ~~during the transfer period~~ in the absence of the transfer. Crop shifting is the shifting from ~~historically planted~~ higher-water-intensive crops ~~historically planted~~ to lower-water-using crops. It does not include land fallowed as part of normal farm operations, which does not make water available for transfer. Cropland idling or crop shifting water transfers make water available by reducing the consumptive use of surface water applied for irrigation. Each proposal needs to ~~make a credible case that reduction in surface water diversions will occur consistent with the~~ contain sufficient information to support the claimed reductions in consumptive use of applied surface water ~~upon which the transfer is based~~. Figure 2-1, ~~on the next page~~, shows the overall cropland idling/crop shifting transfer information required, which is summarized in the subsequent sections.

Crop Shifting/ Cropland Idling Transfers in the Sacramento Valley and Delta Region

Transfers in the Delta Region are closely evaluated prior to approval (Section 2.4)

Crops Allowed for Transfer in 2012 (Section 2.2.2)

Alfalfa ¹	Pumpkin	Sunflower
Beans	Rice	Tomato
Corn	Rye Grass (Winter Irrigation)	Vine Seed/ Curcubits
Cotton	Safflower	Wheat (over wintered)
Melon	Sudan Grass	Wild Rice
Milo	Sugar Beets	
Onion		

Crops Not Allowed For Transfer in 2012 (Section 2.2.5)

Alfalfa (Delta Region) Pasture	Orchard
Mixed and miscellaneous grasses such as Bermuda grass	Vineyard

Estimate crop acreages without the transfer (Section 2.1)

Estimate water available for transfer based on ETAW values and crop acreages with and without transfer (Section 2.3)

Reporting (Section 2.7)
During transfer, seller must report activities to Project Agencies

Monitoring and Verification (Section 2.8)
Project Agencies and the seller will agree on monitoring program.
Seller must provide to the project agencies crop maps and access to fields.
Seller will conduct field monitoring activities.

(1) Limited to Sacramento Valley floor (foothills not included) and north of the American River.



(1) Limited to Sacramento Valley floor (foothills not included) and north of the American River.

Figure 2-1 Cropland idling/crop shifting transfers process flow chart

Figure 2-2, ~~on the next page,~~ summarizes the data needs information requested for a cropland idling/crop shifting water transfer proposal. ~~Sellers must submit complete~~ This information ~~to facilitate will help Project Agencies and processing of~~ the water transfer proposal. ~~The review process will be more efficient for sellers that have and develop the appropriate conveyance contract or letter of agreement between the technical aspects of their proposals properly documented to demonstrate that water will be made available for transfer. Parties- proponents, buyers, and Project Agencies. Sellers~~ are encouraged to work with existing their water purveyor (e.g., water districts and water agencies district) to develop joint water transfer proposals.

Cropland Idling/Crop Shifting Transfers Technical Information – Proposal Checklist

- Submit past 5 years data of:
 - Net crop acreages by crop (acres)
 - Fallowed land (acres)
 - Dry farmed land (acres)
 - Total district acreage (acres)
 - Total farmable acreage (acres)
- Maps showing:
 - District or farm operation boundary
 - Current fields irrigated
 - Fields routinely irrigated and not irrigated
 - Fields to be idled as part of water transfer
- Basis of right to use surface water during the spring and summer in the year of the proposed water transfer

Figure 2-2 Crop idling technical information submittal proposal checklist

2.1 Estimation of Conditions That Would Occur Absent the Transfer

A key element [to the evaluation](#) of a cropland idling and crop shifting water transfer is ~~to determine~~ [the determination of](#) the conditions that would exist without the transfer. Predicting such conditions accurately is often difficult. The use of historical cropping patterns is currently the best method to estimate conditions that would exist absent the cropland idling/crop shifting transfer. The crop history identifies the type of crops typically grown, the degree of land fallowing that typically takes place, and the crop rotation practices that typically occur.

To estimate conditions that would occur without a transfer, [sellers water transfer proponent](#) must provide the following information:

- Accurate crop records for the five years preceding the year of the proposed transfer unless otherwise coordinated with the Project Agencies. Crop acreage should be reported in net field acres of the actual farmed and irrigated acres. If only gross field acres are known (i.e., the county parcel acres), then multiply the gross acres by 0.95 to estimate net acres. Crop acreage needs to be included for each crop (include fallowed lands, non-irrigated crops, and total farmable acres) for the water district or individual farm operation.
- Maps showing district or farm operation boundary, current fields irrigated, fields routinely fallowed or not irrigated, and fields to be idled as part of the proposed water transfer, in a format acceptable to the Project Agencies. The Project Agencies will consider information and maps submitted by [seller a water transfer proponent](#) as well as other available information to

independently determine field acreage. Project Agencies' determined acreages will be used to calculate water made available for transfer.

- The basis of right (water right or contract supply) for use of surface water during the transfer period.

The following sections further describe how this information will be used to determine conditions without the transfer.

2.1.1 Large Water Districts

The term “water district” is used in this [paperdocument](#) as shorthand to include any water company, district, agency, or other entity that provides water service to a group of landholders and can enter into a binding contract with a buyer. “Large water district” is defined as a legal entity serving multiple landowners. If only a few individual landowners within the water district wish to participate in the transfer, they should coordinate with their water district and refer to section 2.1.2 on methods to calculate expected water savings.

A water district's previous [yearyear's](#) crop acreage is typically the best indication of the next year's crop patterns, provided the market for the particular crops grown remains relatively stable, the water supply has not been affected by droughts, and the acreage of the one or two crops with highest water use is typical of past years. The average acreages for these high-water-use crops in each district needs to be reviewed as follows:

- If acreage values for the crops with the highest water use for the immediate prior year are within 5 percent of the five-year average for these crops and there have been no significant market changes for the crop, then the last year's cropping patterns will be used as the base for calculating changes due to the cropland idling and crop shifting transfers.
- If acreage values for the crops with high water use fall outside this range, then another, more typical, year or an average of cropping patterns and acreages will be used, as mutually agreeable between the applicable Project Agency and the party proposing the water transfer.
- Fallowing a percentage of the total crop acreage is a normal agricultural practice. A significant shift in market prices, as has been seen in the rice market in recent years, can temporarily alter the typical fallowing pattern, resulting in a higher percentage of total acreage in production. The use of the prior [yearyear's](#) crop acreage as the baseline in this situation may not be appropriate after a series of consecutive years of elevated production. After a series of years, the Project Agencies may elect to use an alternate method to calculate baseline to account for the need to fallow a percentage of the total acreage as part of normal farming practices. Absent a change in market conditions, prior year cropping pattern will be used in [20122013](#) as the baseline if the acreage meets the conditions noted previously in this section. The issue of baseline will be reevaluated in [20122013](#).

The previous year's data may also be used if additional explanation is provided to the Project Agencies; and if the parties proposing the transfer and the Project Agencies agree that this is the best representation of conditions that would exist absent the cropland idling and crop shifting transfer. In this case, five years of crop data may not be needed. If the Project Agencies and the water district cannot reach agreement on an estimate of the conditions that would likely exist absent the cropland idling and/or crop shifting transfer, then the Project Agencies will not consider the water transfer proposal based on cropland idling or crop shifting.

2.1.2 Individual Farm Operations and Small Water Districts

"Small water district" is defined as a legal entity that serves one or few land owners/landowners. For individual farm operations or small water districts, last year's cropping patterns may be an inappropriate measure of likely future conditions absent the cropland idling/crop shifting transfer because of crop rotation patterns.

Small water districts and individual operations must provide the previous five years of crop history for their entire district or operation to identify significant crop rotation cycles. Where crop rotation cycles are evident for the whole of the farm operation or small water district, either (1) a repeating crop pattern or (2) the five-year average should be used. In these cases, the potential participant has to identify specific fields to be enrolled in the transfer and provide the five-year crop history for these fields, at a minimum. Use of a repeating pattern to characterize routine land idling and crop rotation practices requires the proponent to provide an exact repeating pattern of cropland idling practices for the fields to be involved in the transfer. The lands considered routinely idled would correspond to those in the subsequent year of the pattern. The Project Agencies must agree to use of a repeating pattern.

From this crop history, the proponent must calculate the five-year average of crop evapotranspiration of applied water (ETAW) values, as indicated below, for each field. The five-year average ETAW values for each field would be used as the base for determining changes due to the proposed cropland idling/crop shifting transfer in the year of the transfer. Individual farms or small water districts must provide a statement that the land idled for water transfer is not "shifted" to other operations under their control.

2.1.3 Eligibility of Double-Cropped Fields

If the seller has historically practiced double cropping of a winter crop such as wheat and a second crop grown during the transfer period, the seller may cultivate that winter crop and idle the field for transfer in that transfer year. The water transfer proponent will need to provide evidence to the Project Agencies of the double cropping history verifiable by Farm Service Agency (FSA) acreage consistent with section 2.1 above, including a five-year crop history. The history needs to indicate which crop(s) were historically the second crop (thus assigning the appropriate ETAW) in order to determine the water available for transfer. Refer to Table 2-2 for crops suitable for idling.

2.2 Use of Evapotranspiration of Applied Water (ETAW)

2.2.1 What is ETAW?

ETAW is defined as the portion of applied water that is evaporated from the soil and plant surfaces and actually used by the crop. The portion of the crop evapotranspiration met by precipitation during the growing season or stored as soil moisture within the root zone before the growing season does not qualify as transferable water. ETAW does not include applied water lost as deep percolation to groundwater or conveyance losses. Unless the acreage overlies an unusable groundwater basin or discharges to a saline sink, these depletions contribute to the overall water supply and are excluded from the calculation of transferable water.

Actual crop water requirements vary from one year to the next due to changing climatic conditions. It is not currently feasible to calculate ETAW for the specific conditions of each transfer year; therefore, ETAW values used for water transfer calculations are based upon crop water requirements reflecting average rainfall and evaporative demand. The calculation of water made available for transfer is based upon the quantity of surface water conserved for each qualifying idled acre of cropland and the appropriate ETAW associated with changes in the specific crops idled.

2.2.2 Crops Allowed for Cropland Idling or Shifting and ETAW Values

Tables 2-1 and 2-2, ~~on the next page,~~ show the allowable crop ETAW values for the Sacramento Valley for use in ~~2012~~[2013](#) water transfers.

Table 2-1 Estimated ETAW values (in acre-feet/acre) for crops suitable for shifting in 2012

Crop	ETAW (in af/acre)
Alfalfa ¹	1.7 (July-Sept.)
Bean	1.5
Corn	1.8
Cotton	2.3
Melon	1.1
Milo	1.6
Onion	1.1
Pumpkin	1.1
Rice	3.3
Sudan grass	3.0
Sugar beets	2.5
Sunflower	1.4
Tomato	1.8
Vine seed/cucurbits	1.1
Wheat (over wintered)	0.5
Wild rice	2.0

¹ Only alfalfa grown in the Sacramento Valley floor north of the American River will be allowed in 2012 transfers. Fields must be disced on, or prior to, July 1 of the transfer year. Alfalfa acreage in the foothills or mountain areas is not eligible for transfers in 2012.

~~**Table 2-2 Estimated ETAW values (in acre-foot/acre) for crops suitable for idling in 2012**~~

~~ETAW (in af/acre)-¹ Only alfalfa grown in the Sacramento Valley floor north of the American River will be allowed for transfers. Fields must be disced on, or prior to, to the start of the transfer period. Alfalfa acreage in the foothills or mountain areas is not eligible for transfer.~~

Table 2-2 Estimated ETAW values (in acre-feet/acre) for crops suitable for idling

	Crop	ETAW (in af/acre)
Alfalfa ¹		1.7 (July-Sept.)
Bean		1.5
Corn		1.8
Cotton		2.3
Melon		1.1
Milo		1.6
Onion		1.1
Pumpkin		1.1
Rice		3.3
Safflower		0.7
Sudan grass		3.0
Sugar beets		2.5
Sunflower		1.4
Tomato		1.8
Vine seed/cucurbits		1.1
Wheat (over wintered)		0.5
Wild rice		2.0

¹ Only alfalfa grown in the Sacramento Valley floor north of the American River will be allowed in 2012 transfers. Fields must be disced on, or prior to, July 1 of the transfer

~~year. Alfalfa acreage in the foothills or mountain areas is not eligible for transfers in 2012.~~

~~¹ Only alfalfa grown in the Sacramento Valley floor north of the American River will be allowed for transfer. Fields must be disced on, or prior to, the start of the transfer period. Alfalfa acreage in the foothills or mountain areas is not eligible for transfers.~~

2.2.3 Rice Idling

~~Rice idling constitutes has accounted for the majority of cropland idling transfers in recent years. Through 2012, the quantity of transfer water made available has been calculated based on the pattern of ETAW ~~rather than the timing of river diversions~~. ~~The Project Agencies recognize that due to the unique cultivation requirements of rice, the diversion pattern differs from the ETAW pattern, and they are currently evaluating the technical issues related to selecting the appropriate method for calculating the timing of water availability for rice idling. For the purpose of evaluating transfers in 2012, the Project Agencies will use the ETAW pattern to determine the timing of water available for transfer for rice idling and will continue to work on a resolution of this issue for future transfers.~~~~

~~. In the absence of technical information supporting an alternate method, the quantity of transfer water will continue to be calculated based on ETAW for any rice idling transfers in 2013. Acreage eligible for inclusion in a rice idling program is limited to that acreage that would have been planted to rice in the absence of the ~~program~~. ~~In certain circumstances, a seller may include a winter crop in the same field and for the same year as the proposed idling of rice for the purpose of water transfer. In 2012, this practice will be allowed if the seller has historically practiced this double cropping pattern. The seller will need to provide evidence to the Project Agencies of double cropping history verifiable by Farm Service Agency (FSA) acreage.~~ proposed transfer.~~

Rice fields and irrigation/drainage ditches can provide temporary or permanent forage and habitat for terrestrial wildlife and waterfowl species, including the giant garter snake. ~~Appendix B Section 2.9.1~~ lists conservation measures for rice idling to protect the giant garter snake.

2.2.4 Rice Straw Decomposition

The Project Agencies are not currently considering transfer proposals based on potential water savings from rice straw decomposition, including the use of groundwater substitution for rice straw decomposition water or using mechanized or other removal methods. ~~The Project Agencies will continue to investigate possible approaches regarding rice decomposition water transfers but cannot guarantee that an acceptable approach will be developed in time for the 2012 water transfer season.~~

2.2.5 Limitations on Crops and Lands

Some crops are not eligible for idling or shifting transfers because it is too difficult to determine the real water savings because of a lack of authoritative ETAW values, substantial variability in cultural practices, and other crop-specific reasons. Table 2-3

lists the crops that are not acceptable to Project Agencies for idling or shifting transfers [in 2012](#). The Project Agencies will not consider water transfers that propose idling or shifting of these crops. |

Table 2-3 Crops not suitable for shifting or idling in 2012

Crop
Pasture[†] Pasture
Mixed grasses
Miscellaneous grasses including Bermuda grass
Alfalfa (in the Delta region)
Orchard
Vineyard

~~[†]The Project Agencies are evaluating the use of pasture for future cropland idling/crop shifting transfers; however, it will not be allowed in 2012.~~

Some specific practices and proposals will not be considered for water transfers due to the difficulty in determining the amount of water made available or the uncertainty in what would have happened absent the transfer. These include:

- Removal of permanent crops.
- Fields historically irrigated by groundwater.
- Cropland idling on lands where groundwater is within 5 feet of the land surface or where the crop root zone may extend into the groundwater table. In these areas, cropland idling transfers may be considered if additional monitoring is conducted to determine the water savings and ensure the projected water savings are achieved. Any monitoring program must be approved by the Project Agencies.
- ~~• Where increased water use on other lands within the transferring water district or within the control of the transferring party offsets the volume of water conserved through crop shifting or cropland idling.~~
- A shift in cropping pattern resulting in an increase in cropped acreage in other portions of the water agency or transferring party's holdings that would result in no net reduction in consumptive use within the water agency.

2.2.6 Vegetation Control on Idled Land

In order to get ~~the~~ full credit for the expected water savings, idled land cannot be irrigated during the transfer season. The calculation of consumptive use savings for crop idling assumes that the idled field will be kept dry and free of ~~weeds, vegetation that is actively evapotranspiring~~. Seepage from adjacent irrigation and drainage canals or areas with high groundwater can result in consumption of applied water by vegetation growth on idled fields and bare soil evaporation, thus reducing effective water savings from cropland idling.

~~In 2010, most idled fields were disced and essentially free of excessive vegetation or contained remnant winter vegetation that was essentially dry by mid-June. However, there were isolated fields on which weed growth was noted. Remnant vegetation (weeds or native vegetation, cover crops, and winter crops) in fields that are idled as~~

part of a water transfer has the potential to consume a portion of the estimated transfer water if that vegetation has access to seepage from adjacent canals or flooded fields, or shallow groundwater, and is actively growing during the transfer period. Consumptive use by remnant vegetation from the above sources will be considered excessive vegetation and will affect the amount of transferrable water and must be avoided or accounted for. Below are recommendations for managing remnant vegetation in fields idled for a water transfer:

- Idled land cannot be irrigated during the transfer season.
- The grower must be able to control excessive seepage on the fields to be idled. Fields subject to excessive seepage or high groundwater will be acceptable only if the grower implements supplemental measurement and monitoring efforts to quantify the water made available for transfer.
- Remnant vegetation (weeds, cover crop, and over-winter crop) should not be actively transpiring and should have begun to senesce (have begun to or have already lost color) by the beginning of the transfer period. The onset of senescence may be delayed by late season rains. Precipitation will be considered in evaluating whether remnant vegetation would affect the quantity of transfer water.
- ~~Two weeks prior to the start of the transfer period, Project Agencies will conduct inspections of participating fields to determine whether weed abatement is necessary. If weed abatement is deemed necessary, Project Agencies will notify sellers. Weed abatement (by discing or spraying) must be implemented within two weeks after notifying sellers. Excessive weed growth on idled acreage will lead to a reduction in the verified quantity of water made available for transfer. abatement of remnant vegetation is necessary.~~

~~Observed in 2010 was the use of legumes, such as vetch, as a winter cover crop, an increasingly common practice. These leguminous winter cover crops provide significant agricultural and environmental benefits, such as enhancement of soil nitrogen and percolation rates. The leguminous crops may be disced the following spring, or summer, or left in the field to dry out and provide forage and cover for wildlife. The leguminous crops are overwinter crops and are not irrigated during the summer irrigation season or the transfer period and therefore do not result in a reduction in the calculation of transfer water. Fields with remnant overwintered leguminous crops will be handled on a case by case basis to determine if weed abatement efforts are required prior to the transfer period.~~

- Remnant vegetation may be considered excessive vegetation if it is determined to be supported by seepage from irrigation supplies or shallow groundwater that has the potential to affect the amount of transfer water made available. If remnant vegetation is deemed to constitute excessive vegetation and abatement is determined to be necessary, Project Agencies will provide water transfer proponents with notice and sufficient time to implement abatement measures.

- [Excessive vegetation not abated may result in a reduction in the verified quantity of water made available for transfer. The reduction in quantifiable water made available for the transfer will be cumulative ET from the beginning of the transfer period to the date that the excessive vegetation was abated or the date that the remnant vegetation has senesced and is no longer consuming water.](#)

2.3 Estimating Water Available for Transfer

2.3.1 Large Water Districts

Large water districts need to evaluate the crop acreage that would have existed absent the transfer using the methods presented in section 2.1.1, including the acreage for each crop, idled lands, and all other district lands. Base-year ETAW values can be calculated using the baseline crop acreages and ETAW values in Tables 2-1 and 2-2. The district should then determine the acreages of each crop, fallowed lands, and other lands expected in the coming year with the water transfer. Using these acreages, the ETAW for the coming year is calculated by the same method used for the base year. The base-year and expected current-year crop acreages for the district should be checked to make sure they match. The difference between the base-year and current-year ETAW is used to estimate the water made available by the cropland idling/crop shifting transfer. Final eligible crop acreage will be determined by the Project Agencies.

2.3.2 Individual Farm Operations or Small Water Districts

As stated in ~~section~~[Section](#) 2.1.2, individual farm operations and small water districts may exhibit significant crop rotation sequences and may wish to simply enroll specific land parcels into a cropland idling/crop shifting program. For these cases, section 2.1.2 describes the method to establish a baseline cropping pattern that will allow calculation of the baseline ETAW for each parcel. The ETAW for the parcel for the current year with the water transfer is then established. The difference between the base-year and current-year ETAW is used to estimate the water made available by the cropland idling/crop shifting transfer. Final eligible crop acreage will be determined by the Project Agencies.

2.4 Potential Cropland Idling/Crop Shifting Transfers in the Delta/Yolo Bypass Region

The Project Agencies are working to increase options for transferable water via cropland idling/crop shifting, if options result in real water savings that can be made available at times and locations such that it can be exported by the ~~Projects. In 2012,~~ [the Project Agencies.](#) The Project Agencies will evaluate proposals for transfers originating in the Yolo Bypass/Tule Canal or Delta areas on a case-by-case basis. Many uncertainties exist with transfers originating from the Yolo Bypass/Tule Canal or Delta, including how much water can be made available and whether the transfer

water can be exported by the projects. ~~The Project Agencies will closely scrutinize each Delta transfer proposal.~~

The SWRCB must concur in writing that the transfer water can be accounted for separately as meeting the flow-related compliance objectives in D-1641. The Project Agencies must also be assured that hydraulic connectivity with the Delta exists at all times during the transfer period. If written concurrence is obtained from the SWRCB, ~~extensive~~ measurement, monitoring, and reporting requirements, acceptable to the Project Agencies and paid for by the transfer proponents, will be required for all Delta region transfers to determine and verify transferable water. Sellers must contact the Project Agencies for minimum measurement and monitoring requirements. The Project Agencies will work with each seller on a case-by-case basis for any transfers from the Delta region.

2.5 Limitations on Water Made Available for Transfer

See section 1.2 (Risks and Constraints).

2.6 Adjustments for Water Shortage Years

The baseline to determine water available for transfer is typically based on prior-year or five-year average cropping patterns within the water district or individual seller's service area. If hydrologic conditions are sufficiently dry, sellers' water supply allocations may be reduced, making it difficult to establish what the cropping pattern would have been in the absence of the transfer. The following approach will be used to determine baseline acreages ~~in 2012~~; however, the Project Agencies will analyze the baseline for all transfers based on their unique circumstances.

Is the Seller Facing a Reduced Surface Water Supply During ~~2012~~2013?

1. No: If no, and the seller transferred water in ~~2011~~2012, the baseline for the ~~2012~~2013 transfer is the ~~2011~~2012 baseline unless there are circumstances, such as substantial changes in market conditions that would suggest a change in cropping patterns. If the seller did not transfer water in ~~2011~~2012, an appropriate baseline must be determined. Methods to determine the baselines are described in the previous sections.

2. Yes: If yes, will the reduced supply require reduced consumptive use?

If no, the water transfer proponent will submit data to the Project Agencies to illustrate how the seller will accomplish meeting full consumptive use with reduced surface water supply; include historical diversion data, additional recycling, or other conservation measures. Additional groundwater pumping is an increase to the groundwater baseline for transfer purposes.

If yes, then the baseline for the seller will be based on a calculated ratio of the “district efficiency” or ETAW/diversions.

Under no circumstances will a seller be allowed to transfer more water through cropland idling/crop shifting than the difference between their ~~2012~~2013 surface water allocation and its ~~2012~~2013 actual diversions.

2.7 Reporting

Accurate reporting of the activities undertaken as part of a cropland idling/crop shifting transfer is an essential provision of any water transfer ~~project~~proposal. Reporting is the responsibility of the ~~seller~~water transfer proponent and needs to be acceptable to the Project Agencies.

2.7.1 Acreage Calculation Methodology

~~Current-year~~ Farm Service Agency (FSA) acreage will be used unless ~~seller~~water transfer proponents do not provide FSA acreage for the year of the water transfer. In the 2010 water transfers, sellers provided FSA acreage for years ranging from 2002 to 2010, with acreage discrepancies occurring between the older and more recent FSA acreage. These discrepancies resulted in incorrect acreages of fields included in the 2010 water transfer program. In order to be consistent, ~~seller~~water transfer proponents are required to provide FSA acreage for the year of the actual water transfer ~~year~~ within two weeks of request by ~~DWR Region Office~~Project Agency staff. If FSA acreage for the year of the water transfer ~~year~~ is not provided, ~~upon request~~ ~~DWR~~the Project Agency will provide delineation of ~~seller~~the seller’s property. ~~Sellers~~Water transfer proponents must reimburse Project Agencies for their costs incurred in delineation of field boundaries, in addition to other reimbursable costs.

2.7.2 Monitoring and Verification

Verification of the actions taken to make water available in a cropland idling/crop shifting transfer will be conducted by the ~~seller~~water transfer proponents with the oversight of the Project Agencies. In addition to crop mapping, the following information or actions will need to be provided or completed: ~~by the water transfer proponents.~~

Elements in a cropland idling/shifting monitoring program are listed below.

- Past-year(s) and current-year cropping data.
- Map showing lands participating in the water transfer.
- Verification ~~by the seller~~ that there is a reduction in soil moisture and no water leakage onto idled lands.
- Field checking, ~~by the seller~~, for ~~excess weed growth~~excessive vegetation on idled fields. ~~Excess weed growth is characterized as having a height~~Water

transfer proponent shall notify the applicable Project Agency staff if areas of 2 or more feet excessive vegetation are observed, to request an assessment of the field. Final determinations and more than 50 percent coverage need for grower notification and/or abatement shall be made by the Project Agency.

- If, during the transfer period, the seller has excessive vegetation is identified excess weed growth, abatement efforts are to be undertaken within two weeks.
- Confirmation of correct crop shift as specified in the proposal.
- Previous and current-year diversions for district programs.
- In areas subject to high groundwater or excessive seepage, instrumentation adequate to determine soil evaporation and weed transpiration necessary to calculate reductions in conserved water savings and acceptable to the Project Agencies.
- For fields with remnant vegetation and that had winter cover crops, such as vetch (legumes), if the crop is actively evapotranspiring (i.e., excessive vegetation; see Section 2.2.6) during the typical irrigation season due to such causes as canal seepage or access to groundwater, weed control excessive vegetation abatement measures would will be required to prevent loss of transfer water. An alternative to conducting weed excessive vegetation abatement measures would be the use of instrumentation adequate to determine the cover crop's transpiration and calculate reductions in conserved water savings as noted above.
- Field For areas or crops where calculation of transferable water may require in-field instrumentation, field data that can be used to verify how much water was actually made available by the transfer action(s) and to modify future proposals if warranted.

The seller water transfer proponent will provide access to the fields that are part of the cropland idling/shifting transfer so that the Project Agency can perform field checks and determine soil moisture depletion if necessary. The Project Agencies will coordinate verification activities. Buyers and sellers Water transfer proponents must reimburse Project Agencies for their costs incurred in monitoring and verification, in addition to other reimbursable costs.

2.8 Third-Party Effects

Acres idled for the purpose of a water transfer must be dispersed to minimize impacts on terrestrial wildlife and waterfowl species that may use irrigated croplands or irrigation/drainage ditches for temporary or permanent forage and habitat purposes. Normal farm operations for idled lands are expected to continue. Specific practices

that may need to be implemented to transfer water in 2012 can be found in the USFWS Biological Opinion issued to Reclamation for the 2010 and 2012 water transfers (see Appendix B).

Cropland idling/crop shifting transfers have the potential to affect the local economy. Parties that depend on farming-related activities can experience decreases in business if land idling becomes extensive. Limiting cropland idling to 20 percent of the total irrigable land in a county should limit economic effects. To minimize the socioeconomic effects on local areas and to minimize effects on special status species, Project Agencies will not approve water transfers via cropland idling if more than 20 percent of recent harvested crop acreage in the county for each eligible crop, including rice, would be idled.

Water ~~district~~transfer proponents and others participating in cropland idling/crop shifting transfers need to be sensitive to the possible economic impacts of their actions on their business partners and their neighbors. ~~Sellers should be aware and~~ of potential cumulative effects from water transfers in neighboring districts. Geographically distributing the acres that are idled can avoid or minimize possible economic effects.

Water Code Section 1745.05 (b) provides that if the amount of water made available by land fallowing (idling) exceeds 20 percent of the water that would have been applied absent the proposed water transfer, a public hearing by the water supply agency is required. In the past, cropland idling programs have stayed well below the 20 percent water delivery threshold for a hearing. Water supply agencies interested in participating in cropland idling/crop shifting transfers need to be aware of this Water Code section and conduct a public hearing if they propose a transfer in which cropland idling would exceed the 20 percent threshold.

2.9 Environmental Considerations

2.9.1 DWR Considerations for Rice Land Idling Transfers

Rice fields and irrigation/drainage ditches can provide temporary or permanent forage and habitat for terrestrial wildlife and waterfowl species, including the giant garter snake, which is considered a threatened species under both the ESA and CESA". Idling land dedicated to rice production for the purpose of water transfers has the potential to negatively impact the giant garter snake by removing important habitat. Accordingly, the issuance of a conveyance agreement by DWR will therefore be conditioned on the development of a transfer proposal that does not unreasonably impact the wildlife or environment of the area from which the transfer originated, among other criteria (see Section 1.1). In order for DWR to make a determination that the proposed transfer does not unreasonably impact these resources, the water transfer proponent from rice land idling must incorporate conservation measures that minimize the impacts on the giant garter snake. It is DWR's judgment that the

conservation measures outlined in the USFWS biological opinion for Reclamation's 2010-2011 Water Transfer Program⁵ represent the most current and best scientific information on protective measures for the giant garter snake. Accordingly, DWR will require transfer proponents to incorporate in their transfer proposals those conservation measures from the biological opinion relevant to crop idling (listed below).

Adoption of these measures will be required of all rice-land-idling-based water transfer proponents to minimize impacts on the giant garter snake from rice idling. Adoption of these measures, however, does not constitute compliance with the federal ESA and CESA. It is the responsibility of water transfer proponents to secure compliance with all local, state, and federal laws and regulations.

Conservation Measures

- The block size of idled parcels will be limited to 320 acres in size. The 320-acre blocks will not be located on opposite sides of a canal or other waterway and will not be immediately adjacent⁶ to another fallowed parcel (a checkerboard pattern is the preferred layout).
- No more than 20 percent of rice fields may be idled cumulatively (from all sources of fallowing) in each county.
- Parcels participating in cropland idling will not include lands in the Natomas Basin.
- Water transfer proponents will continue to voluntarily perform giant garter snake best management practices, including educating all district personnel to recognize and avoid contact with giant garter snakes, clean only one side of a conveyance channel per year, and raise flail mower blades to at least 6 inches above the canal operation and maintenance road surfaces.
- A depth of at least two feet of water will be maintained in the major irrigation and drainage canals to provide movement corridors.
- A field proposed for a cropland idling transfer cannot be fallowed more than two irrigation seasons in a row.
- Water transfer proponents must provide the Project Agencies access to land being idled to verify the implementation of Conservation Measures and other monitoring and verification activities as noted in Section 2.7.2.

⁵ U.S. Fish and Wildlife Service, March 2, 2010. Memorandum: From Susan Moore, USFWS Sacramento, to Richard Woodley, U.S. Bureau of Reclamation, Sacramento — Endangered Species Consultation on the Bureau of Reclamation's Proposed Central Valley Project Water Transfer Program for 2010-2011.

⁶ For the purpose of complying with conservation measures, parcel adjacency is not negated by any natural or artificial feature that a giant garter snake could traverse. Features that do not constitute barriers include but are not limited to roads, railroad tracks, levees, berms, and any open air waterways other than large rivers (e.g., Sacramento River).

2.9.2 Reclamation's ESA Considerations for Rice Land Idling Transfers

Reclamation must consider the effects of idling rice acreage for the purpose of a water transfer on ESA-listed species, as terrestrial wildlife and waterfowl species may use irrigated croplands or water infrastructure for temporary or permanent forage and habitat. Specific practices that may need to be implemented to transfer water in 2013 would be similar to those found in the USFWS biological opinion issued to Reclamation for the 2010 and 2011 water transfers, and those summarized above.

Section 3. Water Transfers Based on Groundwater Substitution

This section provides technical information to ~~local parties~~[prospective water transfer proponents](#) who wish to transfer water ~~in 2012~~ through groundwater substitution. Groundwater substitution transfers make surface water available for transfer by reducing surface water diversions and replacing that water with groundwater pumping.

The rationale behind a groundwater substitution transfer is that surface water demands are reduced because a like amount of groundwater is used to meet the demands. The resulting increase in available surface water supplies can be transferred to other users. The net amount of additional surface water supply, or transferable water, created through groundwater substitution transfers must account for: (1) the amount of increased pumping that occurs in support of the transfer during the time that export facilities can convey the water, (2) the extent to which transfer-related groundwater pumping decreases ~~stream flow~~[streamflow](#) (resulting from surface water-groundwater interaction), and (3) the timing of those decreases in available surface water supply.

A groundwater substitution transfer proposal generally consists of the following components:

- [Documentation of surface water rights and the method used to quantify the amount of surface water available for the transfer.](#)
- The location and characteristics of the wells ~~that will pump~~[proposed for use in pumping](#) groundwater.
- The proposed volume and schedule of transfer-related groundwater pumping.
- A monitoring plan designed to assess the effects of the transfer.
- A mitigation ~~strategy~~[plan designed](#) to alleviate possible third-party impacts.

~~The detailed~~[An overview of the](#) requirements for a [groundwater substitution](#) proposal ~~are~~[is](#) included in Figure 3-1 ~~and~~, [the details of which are](#) discussed later in this section ~~in more detail~~.

Submit the following information to the Project Agencies for review and approval prior to the beginning of the transfer.

- Surface water source that will be replaced by groundwater pumping
- Location and construction details of wells that will be pumped
 - Well Identification: Well owner name and identification number, water district, and district's well identification number
 - Well Location: Latitude and longitude, Township, Range and Section, map (similar detail to 7.5 minute USGS quad sheet) with well location and all surface water within 2 miles of District boundary
 - Well Construction: well depth, depth of annular surface seal, gravel pack interval(s), casing size, casing perforation intervals, and well's construction method
 - Geologic Log
 - Estimated Well Capacity
 - Photographic evidence of the calibrated instantaneous reading and totalizing flow meters installed on each participating well
 - Certification by a Professional Engineer or Professional Geologist for accurate flow meter installation
 - Estimates of stream flow depletion calculated using approved numerical hydrologic models; or when modeling information is not available, use of the well criteria (Appendix C) and streamflow depletion factor (12%)
 - Additional Information (If available): PG&E well pump efficiency test, independent well drawdown tests, water quality data, and/or site-specific studies with aquifer properties surrounding the well or extent of the well's hydrologic connection with any surface waters
 - Pump Power: Verification of an electric source for well, or if diesel pump, verification of compliance with Air Board Regulations
- Schedule and volume of water to be pumped
 - Proposed Operations: Description of the well's projected operation and the projected beneficial use of pumped water
- Baseline from which the additional pumping will be measured
 - Historic Operations: Operation records indicating the volume of water pumped from each well during July through September 2011. Identify and document area(s) normally irrigated by wells.

Monitoring program - submit the monitoring plan to the Project Agencies at least two months prior to the groundwater substitution transfer. The seller shall begin the monitoring program at least one month prior to the proposed transfer.

- A monitoring well network that adequately covers the surface area and aquifer intervals within the affected pumping area
- Meter readings of instantaneous flow (gpm) and total discharge volume at each of the groundwater substitution wells (at least monthly)
- Groundwater level measurements (at least monthly)
- Groundwater quality monitoring (when groundwater pumping is initiated, monthly during the transfer period, and at the termination of pumping)
- Method to detect land subsidence or that subsidence is unlikely to occur
- Plans to coordinate data collection and cooperate with regional monitoring efforts
- Data evaluation, logging and reporting

Mitigation Plan - submit a mitigation plan to the Project Agencies at least two months prior to the groundwater substitution transfer.

- A procedure for the seller to receive reports of purported environmental or third party effects and to report that information to the Project Agencies and, as required, to local agencies
- A procedure for investigating any reported effect
- Development of mitigation options, in cooperation with the affected third parties, for legitimate effects
- Assurances that adequate financial resources are available to cover reasonably anticipated mitigation needs

Submit the following information to the Project Agencies for review and approval at least three months prior to the proposed transfer.

- Surface water source that will be replaced by groundwater pumping
- Location and construction details of wells that will be pumped
 - Well Identification: Well owner name and identification number, water district, and district's well identification number
 - Well Location: Latitude and longitude, Township, Range and Section, map (similar detail to 7.5 minute USGS quad sheet) with well location and all surface water within two miles of District boundary
 - Well Construction: well depth, depth of annular surface seal, gravel pack interval(s), casing size, casing perforation interval, and well's construction method
- Geologic Log
- Estimated Well Capacity
- Photographic evidence of the calibrated instantaneous reading and totalizing flow meters installed on each participating well
- Certification by a Professional Engineer or Professional Geologist of proper flow meter installation and calibration
- If applicable, for Project Agencies consideration, technical analysis that supports a streamflow depletion factor (SDF) other than 12% and/or information sufficient to demonstrate that a well likely does not have a significant hydraulic connection to the surface water system tributary to the Delta according to the well acceptance criteria (Appendix B). For this specific information, it is recommended transfer proponents provide additional time for Project Agency review.
- Additional Information (if available): PG&E well pump efficiency test, independent well drawdown tests, water quality data, and/or site-specific studies with aquifer properties surrounding the well or extent of the well's hydrologic connection with any surface waters
- Pump Power: Verification of an electric source for well, or if well is diesel or natural gas powered, verification of compliance with Air Board Regulations
- Schedule and volume of water to be pumped
 - Proposed Operations: Description of the well's projected operation and the projected beneficial use of pumped water
- Baseline from which the additional pumping will be measured
- Historic Operations: Operation records indicating the volume of water pumped from each well during July through September 2012. Identify and document area(s) normally irrigated by wells

Monitoring Program - submit the monitoring plan to the Project Agencies along with the transfer proposal. The seller shall begin monitoring groundwater levels in March prior to the proposed transfer.

- A monitoring well network that adequately covers the surface area and aquifer intervals within the affected pumping area
- Meter readings of instantaneous flow (gpm) and total discharge volume at each of the groundwater substitution wells (collected as specified)
- Groundwater level measurements (collected as specified)
- Groundwater quality monitoring (when groundwater pumping is initiated, monthly during the transfer period, and at the termination of pumping)
- Method to detect land subsidence or that subsidence is unlikely to occur
- Plans to coordinate data collection and cooperate with regional monitoring efforts
- Data evaluation and reporting

Mitigation Plan - submit a mitigation plan to the Project Agencies at the time the transfer proposal is submitted

- A procedure for the seller to receive reports of purported environmental or third party effects and to report that information to the Project Agencies and, as required, to local agencies
- A procedure for investigating any reported effect
- Development of mitigation options, in cooperation with the affected third parties, for legitimate effects
- Assurances that adequate financial resources are available to cover reasonably anticipated mitigation needs

Figure 3-1 Groundwater substitution ~~transfer~~ technical information — proposal checklist

3.1 Compliance with Local Groundwater Management Plans and Ordinances

Compliance with local requirements (including ordinances relating to well drilling, well spacing, and groundwater extraction) and local groundwater management plans, as well as compliance with ~~adjudications and with the overdraft protections in~~ Water Code Section 1745 et seq., will be the responsibility of the entity proposing the groundwater substitution transfer.

~~Individual county requirements vary throughout the Sacramento Valley.~~ The approval process associated with a proposed groundwater substitution transfer varies by county and may take a significant amount of time. Table 3-1 provides brief descriptions of the water transfer requirements for individual counties, in geographic order from north to south. Potential sellers are advised to contact the counties early to discuss the requirements for water transfer approval.

Table 3-1 Description of county ordinances ~~and plans pertaining related~~ to groundwater transfers

County	Description	Sources for more information
Shasta	Ordinance pertaining to the Redding Groundwater Basin portion of Shasta County requires a permit for extraction and export of groundwater, either directly or indirectly, for use outside the county. Application for a transfer permit should be submitted to the chief engineer of the Shasta County Water Agency.	Shasta County Water Agency (530) 225-5181 http://www.co.shasta.ca.us/index/pw_in dex/engineering/water_agency.aspx
Tehama	Ordinance requires a permit to extract groundwater for off-parcel use, prohibits mining of groundwater, and restricts the radius of influence associated with the operation of a well participating in transfer operations to the parcel on which the well is located, among other requirements.	Tehama County Health Agency, Environmental Health Division (530) 527-8020 http://www.tehamacountypublicworks.ca.gov/Flood/
Butte	Ordinance requires permits for groundwater extraction for use outside the county, and requires a permit for groundwater substitution pumping. Butte County also has a well spacing ordinance. The Butte County Water Commission advises the Board of Supervisors with technical information from the Butte County Water Advisory Committee and Technical Advisory Committee.	Butte County Department of Water and Resource Conservation (530) 538-4343 http://www.buttecounty.net/Water%20and%20Resource%20Conservation and Resource Conservation.aspx
Glenn	Ordinance uses basin management objectives of groundwater levels, groundwater quality, and land subsidence to help define safe yield and overdraft of the basin. The ordinance is enforced by the Glenn County Board of Supervisors.	Glenn County Department of Agriculture (530) 934-6501 http://www.glenncountywater.org/about_us.aspx

Colusa	Ordinance requires a permit for extraction and export of groundwater, either directly or indirectly, for use outside the county. Application for a transfer permit is filed with Colusa County Groundwater Commission, through the director of the Planning and Building Department.	County Director of Planning and Building (530) 458-0480 http://www.codepublishing.com/CA/colusa/colusa.htm http://colusagroundwater.ucdavis.edu/index.htm
Sutter	Sutter County has no ordinance governing the extraction and export of groundwater. According to its general plan, Sutter County has a long-term interest in discouraging water transfer/export sales if they result in long-term supply losses.	Chief of Water Resources (530) 822-3299 http://www.co.sutter.ca.us/doc/government/depts/cs/ps/gp/gp_home
Yolo	Ordinance (Title 10, Chapter 7, Groundwater) requires a permit for extraction and export of groundwater, including the extraction of groundwater to replace a surface water supply. Application for a permit should be filed with the Director of Community Development.	Director of- Planning and Public Works (530) 666-8775 http://www.yolocounty.org/Modules/ShowDocument.aspx?documentid=1899
Sacramento	Ordinance (Title 3 section 3.40.090, Ground and Surface Water Export) requires a permit for groundwater or surface water to be transported in any manner outside the county. Application for a permit must be filed with the director of the Sacramento County Department of Water Resources.	Sacramento County Department of Water Resources (916) 874-6851 http://www.countycounsel.saccounty.net/coswems/groups/public/@wcm/@pub/@coco/@intra/documents/webcontent/sac-017441.pdf http://www.countycounsel.saccounty.net/Documents/sac_017441.pdf
Solano	At this time, Solano County has no ordinance governing the extraction and export of groundwater.	Solano County Water Agency (707) 451-6090

3.2 Evaluation of Groundwater Substitution Transfer Proposals

Before beginning transfer operations, the water transfer proponent will need to develop a groundwater substitution transfer proposal and provide it to the Project Agencies for evaluation.

The Project Agencies will review groundwater substitution transfer proposals to determine whether they meet the following objectives.

- Transfer will result in providing the agreed-upon amount of transfer water.
- Transfer will not unreasonably affect fish, wildlife, other instream beneficial uses, or the environment and will have no significant unmitigated environmental effects.

- Transfer will not injure other legal users of water.
- Proposal shows that a monitoring and mitigation [strategy plan](#) is in place prior to the transfer.

The Project Agencies need sufficient information to determine whether the transfer will meet the desired objectives. The following sections describe the information to be submitted with the proposal.

3.3 Groundwater Substitution Wells

The Project Agencies will conduct a [well](#)-review to determine whether the proposed [well\(s\)](#) are suitable for use in a water transfer operation and meet the above objectives.

~~Sellers~~ [Water transfer proponents](#) must provide sufficient information, described below, to ~~help~~ [assist](#) the Project Agencies ~~conduct~~ [conducting](#) the well review. Wells ~~will~~ [may](#) be considered ineligible for transfer-~~related~~ pumping if ~~a~~ review of location and construction ~~or other data~~ [demonstrates that either of the below is true:](#)

- ~~• Sufficient information is not available to estimate a well's potential effects; or~~
- A well is completed in ~~an~~ [unconfined aquifer](#) ~~that~~ [is](#) likely to be ~~hydrogeologically continuous with~~ [hydrologically connected to](#) a streambed or other surface water feature.
- ~~• Sufficient information is not available to estimate a well's potential effects.~~

3.3.1 Information Requirements for ~~Water Transfer~~ [Groundwater Substitution](#) Wells

The Project Agencies need the information listed below to evaluate a groundwater substitution transfer proposal. ~~(Refer to Appendix C lists B for a listing of the current well acceptance criteria.)~~ ~~In 2012, sellers~~ [2013, water transfer proponents](#) can resubmit data for wells ~~accepted~~ [used](#) for ~~recent~~ transfers ~~(in 2009 through 2011), for Project Agency consideration,~~ if there have been no changes to the wells. However, ~~verification~~ [certification](#) of ~~proper~~ flow meter ~~installation and~~ calibration ~~may need to~~ [must](#) be submitted ~~annually~~ [for each well.](#) ~~Sellers every two years.~~ [Water transfer proponents](#) should consult with Project Agencies prior to submitting their proposal. The following information should be included in the water transfer proposal:

1. Well identification: The well owner's name, the well owner's identification number, the water district or agency where the well is located, and the water district or agency's well identification number (if different from the well owner's identification number).
2. Well location:
 - a. Latitude and longitude and the township, range and section. The location can be determined with a hand-held global positioning system (GPS) unit or instrument with greater measuring accuracy. GPS coordinates should be

given using the current DWR standard coordinate system and datum: ~~Latitude/Longitude~~latitude/longitude in decimal degrees, using ~~NAD83 datum~~ (North American Datum 1983 (NAD83)).

- b. A map, with at least as much hydrologic and physical detail as that of a 7.5-minute U.S. Geological Survey quadrangle sheet, showing the location of all production and monitoring wells that will be involved in the transfer and the location of all surface water features within ~~two miles~~ of the district service area boundary.
3. Historic operations: Operation records indicating the volume of water pumped from each participating transfer well ~~on a monthly basis in 2011~~ during 2012. Records of power consumption along with a well pump efficiency test conducted within the last two years may be submitted in place of flow measurements from a totalizing flow meter.
4. Proposed operations:
 - a. Description of the wells' projected operations (e.g., is groundwater to be applied to surrounding land, or is groundwater to be pumped into district canals, ~~etc.~~;) and the projected beneficial use of pumped water.
 - b. Verification that a totalizing flow meter has been installed and calibrated.
5. Well construction: Provide total well depth, depth of annular surface seal, gravel pack intervals, casing size, casing perforation intervals (or open hole interval), and well's construction method (cable tool, rotary gravel pack well, etc.).
6. Geologic log: Details of geologic materials described on the well log.
7. Estimated well capacity: ~~Identify estimated~~ Estimate well capacity and describe method ~~for determining capacity of determination~~.
8. Additional information: If available, provide results of a Pacific Gas and Electric (PG&E) (or equivalent) well pump efficiency test, independent well drawdown tests, water quality data, and site-specific studies that document aquifer properties surrounding the well or the extent of the well's hydrogeologic/hydrologic connection with any surface waters.
9. Pump power: Wells powered by an electric source are eligible for use in transfers. Wells powered by diesel or ~~gasoline~~ natural gas engines are eligible for use in the transfer if ~~the seller complies with~~ applicable air quality and other environmental laws and regulations are complied with and ~~provides~~ appropriate mitigation is provided.

The amount of information submitted for each well will depend on its location relative to surface water features and other areas that may be sensitive to groundwater pumping effects. The Project Agencies will require site access for field verification of the above information, and collection of additional data during the program.

3.4 Determining the Amount of Transferable Water

Transferable water equals the incremental increase in Sacramento River flow to the Delta created by transfer operations during balanced Delta conditions. Balanced Delta conditions occur when the Project Agencies agree that releases from upstream reservoirs plus unregulated flow approximately equal the water supply needed to meet Sacramento Valley in-basin uses plus exports. Sacramento River flow increases as sellers use groundwater pumped from wells to replace surface water provided by river diversions. The resulting increase in ~~stream flow~~streamflow is reduced by varying degrees as transfer-related groundwater pumping affects ~~stream flow~~streamflow.

Information provided in the water transfer proposal will be used in conjunction with monitoring report data to calculate the amount of water the transfer operations make available. The amount of transferable water credited to a groundwater substitution water transfer operation in ~~2012~~2013 will be determined as follows.

1. Establish the baseline groundwater pumping for ~~at~~the transfer operation.
2. Determine the difference between ~~the~~ proposed groundwater ~~substitution~~ pumping in ~~2012~~2013 and the baseline.
3. Determine the reduction in ~~stream flow~~streamflow during balanced Delta conditions resulting from pumping groundwater to make surface water available for transfer.
4. Calculate the difference between 2 and 3, above.
5. The following formula summarizes the above four steps: (~~2012~~2013 Groundwater ~~Substitution~~ Pumping) – (Baseline Groundwater ~~Use~~Pumping) – (Estimated ~~Stream Flow~~Streamflow Reduction) = (Surface Water Made Available for Transfer).

The ~~next~~following sections describe these steps.

3.4.1 Determining the Baseline Groundwater Pumping

The baseline is the amount of groundwater pumping that would have occurred during the transfer period without the transfer. For water transfers in ~~2012~~2013, the Project Agencies will use the ~~2011~~2012 records of groundwater pumping submitted by the ~~seller~~water transfer proponents to establish the baseline. ~~Sellers~~Water transfer proponents are requested to submit the following information for non-transfer pumping years.

- Identify all wells that discharge to the contiguous surface water delivery system within which a well is proposed for use in the transfer program.
- The amount of groundwater pumped ~~in 2011~~monthly during 2012 for each well that discharges to the contiguous surface water delivery system.

The Project Agencies will calculate baseline groundwater pumping based on the total volume pumped in non-transfer years from all wells proposed participating transfer wells (typically July through September) that discharge to a contiguous surface water delivery system in non-transfer years. Newly participating sellers may be allowed to use records of electrical power consumption along with well pump efficiency test data (from a test conducted within the past two years) to estimate baseline groundwater pumping.

To participate in future groundwater substitution transfers, participating transfer and non-transfer wells that discharge to a contiguous surface water delivery system should be metered through and recorded on a monthly basis during both non-transfer and non-transfer years so that the baseline can be properly established.

If sellers experience experienced cutbacks of to their normal surface water allocation in 2012, the amount of baseline groundwater pumping will be determined on a case-by-case basis after consultation with the seller.

3.4.2 Measuring Groundwater Pumped

Sellers should provide pumping records from all wells that discharge to a contiguous surface water delivery system used in groundwater substitution transfers. An instantaneous reading and totalizing flow meter shall be installed on each well participating in groundwater substitution water transfers. The flow meter shall be installed such that:

- Each flow meter is in good working order and properly sized, positioned, and oriented on the discharge piping to ensure accurate accurately measured flows;
- Discharge piping is configured to ensure that full pipe flow conditions are met where the meter is installed; and.
- The manufacturer's standards for sizing, positioning, orientation orientating, and calibration calibrating of the meter are followed.

A Sellers must have a qualified professional engineer or professional geologist should certify that each well well's flow meter installation for conformance with and calibration conforms to the manufacturer's specifications prior to use. Sellers shall provide a photograph of each participating well showing the flow meter installation and associated plumbing. Project Agencies may conduct independent field checks of flow meter installations to verify the information provided and manufacturer's standards are met.

An exception to the above accounting method for groundwater substitution transfers applies to districts that can provide water from their own reservoir(s) and replace it with groundwater pumping. If a reservoir controls flow to a stream where gages or weirs are sufficiently accurate, and stream flow streamflow is sufficiently low that the Project Agencies can use stream gage or weir data to determine how much water is being provided for transfer, the stream gage or weir data may be used in place of

totalizing flow meters on individual wells. In these cases, additional analysis of reservoir operations may be required to determine ~~if whether~~ transfer operations must consider reservoir refill criteria (see Section 4). Data requirements for transfer proponents that can operate a groundwater basin in conjunction with their own reservoir will be determined on a case-by-case basis.

The development of a water transfer proposal must take into account that a district's total diversion of surface water during the year shall not exceed the maximum amount provided under its water service or settlement contract with the United States, or its water service contract with DWR, or their appropriative water rights, less the total quantity of groundwater provided by wells within a district pumping under a groundwater substitution transfer agreement.

3.4.3- Estimating the Effects of Transfer Operations on ~~Stream Flow~~Streamflow

Groundwater pumping for transfer operations will yield water at the expense of ~~current and~~ future ~~stream flow~~streamflow. Flow reduction in a river, stream, canal, or drain could injure other legal users of water ~~if it occurs when the Delta is in balanced conditions~~ (see section 1.1)-) ~~or there is limited streamflow in the channel from which the water is being transferred.~~ However, if transfer-related ~~stream flow~~streamflow losses occur when the Delta is in excess conditions, ~~the effect of the transfer operations does~~ and there is sufficient flow in the stream channel from which the water is being transferred, the streamflow depletions should not ~~injure~~impact the ~~Projects'~~water supply ~~available to other legal users.~~

~~For~~Although real time streamflow depletion due to groundwater substitution pumping for water transfers ~~in 2012, the~~ cannot be directly measured, impacts on streamflow due to groundwater pumping can be modeled. Project Agencies have applied the results from prior modeling efforts to evaluate potential groundwater transfers in the Sacramento Valley to establish an estimated average streamflow depletion factor (SDF) for transfers requiring the use of Project Facilities. To account for the anticipated streamflow depletion, Project Agencies will ~~use the well~~apply an SDF to the amount of water pumped pursuant to each transfer proposal in the Project Agency's respective conveyance contract or letter of agreement.

Project Agencies will evaluate transfer proposals along with any available monitoring data. Project Agencies will apply a 12 percent SDF for each project meeting the criteria ~~detailed in Appendix C to evaluate and~~ contained in this chapter unless available monitoring data analyzed by Project Agencies supports the need for the development of a transfer proposal site-specific SDF. Transfer proponents may submit site-specific technical analysis supporting a proposed SDF for review and potential approval by Project Agencies, in the event Project Agencies determine which wells are suitable for transfers and assume that stream flow losses due to groundwater pumping for transfers are 12 percent of the amount pumped for transfer. This depletion factor will be applied to all wells participating in a site-specific SDF is required for the proposed transfer proposal. It is recommended that water transfer proponents provide Project Agencies with adequate time to review proposed data supporting an alternate SDF.

Project Agencies are developing tools to more accurately evaluate the impacts of groundwater substitution transfers. The Project Agencies will revise the 12 percent depletion factor in on streamflow. These tools may be implemented in the near future years as additional technical information becomes available, and may include a site-specific analysis that could be applied to each transfer proposal.

Available local hydrologic models may be used to determine effects on stream flow. The Project Agencies must approve use of the model and results. The 12 percent depletion factor will be applied if existing models are not approved by the Project Agencies.

3.5 Monitoring Program

Groundwater substitution ~~has~~transfers have the potential to cause injury to local groundwater users due to the additional groundwater pumping needed to allow the ~~surface water~~substitution transfer to take place. Injury ~~could also occur~~ to other surface water users could also occur if the additional groundwater extraction results in a significant reduction in ~~stream flow~~streamflow when those users need it.

SellersWater transfer proponents transferring water ~~in 2012~~ via groundwater substitution transfers must establish a monitoring program ~~that is~~ capable of identifying any adverse transfer-related effects before they become significant. The Project Agencies will evaluate the monitoring program for its ability to meet the objectives listed below. The regional extent and frequency of monitoring necessary to meet objectives will depend on site-specific factors. For instance, areas that are susceptible to land subsidence may require groundland surface elevation surveys, while areas with groundwater quality concerns may require a more comprehensive suite of water quality testing.

In order to provide adequate review time, water transfer proponents should provide a monitoring plan to the Project Agencies ~~at least two months prior to~~along with the ~~groundwater substitution~~ transfer proposal. In order to properly ~~monitor water transfer project impacts~~establish baseline groundwater levels, the groundwater level monitoring program should begin in ~~the month of March prior to the proposed transfer~~2013.

3.5.1 Monitoring Plan Objectives

The monitoring plan needs to describe how the sellerwater transfer proponent will collect, evaluate, and report the monitoring data in order to meet the following objectives.

- Accurately account for the quantity of groundwater pumped to replace surface water ~~deliveries~~diversions.
- Determine the extent of surface water-groundwater interaction in the areas where groundwater is pumped for the transfer.
- ~~Assess the effects of the transfer on the existing groundwater system.~~
- Determine the direct effects of transfer pumping on the groundwater basin, including any residual effects observable until full recovery to pre-project water levels occurs or seasonal high levels occur in the springMarch of the year following the transfer.
- Assess the magnitude and potential significance of any effects on other legal users of water, instream beneficial uses, the environment, and the economy.

- Comply with federal and State laws and local ordinances ~~consistent with State law.~~
- Coordinate the transfer monitoring program with other established groundwater monitoring programs in the area.

Water transfers may not cause significant adverse effects ~~to~~ nearby federally-reserved Indian Trust Assets. Proposed transfers near Indian Trust Assets may require additional monitoring commitments, such as increased ~~frequency of~~ groundwater level measurements or additional groundwater quality sampling.

3.5.2 Monitoring Program Elements

To meet the objectives, a monitoring program will contain (at a minimum) the following elements ~~at a minimum~~.

Monitoring Well Network

~~The seller will provide documentation that the monitoring well network addresses the location of production wells, the construction of both the monitoring and production wells, the location of third party wells, the relationship of production wells to surface water bodies, and any contaminated areas that could be affected by pumping. The monitoring program will incorporate~~ The monitoring well network shall include a sufficient number of monitoring wells to accurately characterize groundwater levels in the area before, during, and after transfer-related groundwater pumping.

~~Sellers~~ Water transfer proponents will submit detailed information for monitoring wells, which includes ~~the well identification, well location, well construction, and geologic log information as described in section 3.3.1 of this document.~~

- The location and construction of both proposed transfer wells and monitoring wells, and third party wells.
- Identification of known contaminated areas that could be affected by transfer pumping.

Groundwater Pumping Measurements

All wells pumping to replace surface water designated for transfer shall be configured with a permanent instantaneous and totalizing flow meter (capable of measuring well discharge ~~rates~~ rate and ~~volumes~~ volume) as described in section 3.4.2 of this document. Flow meter readings will be recorded just prior to initiation of pumping and at designated times, but no less than monthly and as close as practical to the last day of the month, throughout the duration of the transfer. The seller will report the readings and calculate and report the quantity of water pumped between successive readings. In addition, the seller will record electric meter readings (or diesel or natural gas engine hours, as applicable) and report them to the Project Agencies as requested.

To participate in future groundwater substitution transfers, participating wells should be metered, and pumping rates and volumes should be recorded during both transfer

~~and~~ non-transfer ~~and transfer~~ years so that the baseline groundwater pumping can be ~~properly~~accurately established.

Groundwater Levels

Sellers will collect groundwater level measurements in both ~~production~~participating transfer wells and monitoring wells. Groundwater level monitoring will include measurements before, during, and after transfer-related pumping. The ~~seller~~water transfer proponent will measure groundwater levels as follows:

- Prior to transfer: Groundwater levels will be measured monthly from March ~~of the transfer year~~2013 until the start of transfer.
- Start of transfer: Groundwater levels will be measured on the same day that the transfer begins, prior to the pump being turned on.
- During transfer: Groundwater levels will be measured weekly throughout the transfer period.
- Post-transfer: Groundwater levels will be measured weekly for one month after the end of transfer pumping, after which ~~water~~groundwater levels will be measured monthly ~~until~~ March ~~of the year following the transfer~~2014.

Sellers will submit a proposed monitoring schedule to the Project Agencies. ~~In some cases, groundwater levels may need to be measured more often than noted above.~~

Groundwater Quality

~~Municipal water sellers~~Groundwater pumped by municipal water transfer proponents must meet ~~stringent~~ water quality requirements ~~regulated by~~of the California Department of Public Health under the California Code of Regulations, Title 22. ~~The comprehensive water quality testing requirements of Title 22 should be sufficient for the water transfer monitoring program.~~ Project Agencies may request that ~~sellers~~water transfer proponents provide a three-year summary of all specific conductance and total dissolved solids (TDS) results for water samples from each proposed transfer well for review prior to acceptance.

~~Agricultural water sellers~~Water transfer proponents with an agricultural groundwater source shall measure the field parameter specific conductance in samples from each participating transfer well. Samples shall be collected ~~when the seller~~as follows.

- When pumping is first ~~initiates pumping, initiated and~~ no later than the day the pump starts, ~~monthly~~.
- Monthly during the transfer period, ~~and on~~.
- On the day that transfer pumping is terminated.

Specific conductance measurements should be ~~measured~~collected at the same time that ~~water~~groundwater level measurements are collected. The ~~sellers~~water transfer proponent shall record water quality meter calibration information, water quality

measurements, and other site-specific information relevant to water quality on the field log provided by DWR.

Some wells may require a more comprehensive suite of water quality testing. These include wells in areas with known groundwater quality problems, municipal wells producing water exceeding specific conductance of 900 ~~micro~~ Siemens/microSiemens/centimeter ($\mu\text{S}/\text{cm}$), (California Secondary Maximum Contaminant Level [Recommended]⁷) or agricultural wells producing water exceeding specific conductance of 700 $\mu\text{S}/\text{cm}$. (Water Quality for Agricultural⁸). Where applicable, seller/water transfer proponents should provide a brief discussion of local groundwater quality issues to Project Agencies. Project Agencies and the seller will determine the appropriate level of groundwater quality monitoring prior to the start of transfer pumping in these areas.

Land Subsidence

The extent of required monitoring will depend on the susceptibility of the area to land subsidence. Areas with documented land subsidence will require more extensive monitoring than ~~other areas with no documented land subsidence~~. The Project Agencies will work with the seller/water transfer proponent to develop a mutually agreed upon subsidence monitoring program. Monitoring could ~~range from~~ include periodic determination of groundland surface elevation in strategic locations throughout the transfer area ~~up to and~~ installing and monitoring extensometers.

Coordination with Other Monitoring EffortsPlan

The monitoring program will include a plan to coordinate the collection and organization of monitoring data, and will identify the water transfer proponent's point of contact (POC). The POC will be responsible for communication with the well operators and other decision makers. ~~The monitoring plan POC will identify a contact person~~ be responsible for the monitoring and ~~assembly~~ reporting of transfer-related data. ~~This contact person~~ The POC should be available to meet with the Project Agencies before the start of the transfer ~~pumping~~. Together, these parties may visit the ~~production~~ participating transfer wells and monitoring wells at least one month prior to the start of pumping to measure pre-~~pumping~~ transfer groundwater levels, inspect flow meter installations, and record pre-transfer meter readings. Sellers/Water transfer proponents should coordinate their monitoring efforts with other local groundwater monitoring programs.

⁷ CA Dept. of Public Health website:
<http://www.cdph.ca.gov/certlic/drinkingwater/pages/chemicalcontaminants.aspx>

⁸ 1985. Water Quality for Agriculture:
<http://www.fao.org/docrep/003/T0234E/T0234E00.htm>.

Evaluation and Reporting

The proposed monitoring program will describe the method of reporting monitoring data. At a minimum, sellers water transfer proponents will provide data summary tables to the Project Agencies, both during and after transfer-related groundwater pumping. Post-transfer reporting will continue until water levels recover to pre-pumping levels or groundwater levels recover to seasonal highs in the spring of the year following the March 2014. Water transfer-Sellers proponents will provide a final summary report to the Project Agencies evaluating the effects of the water transfer program. The final report will identify program-related impacts on groundwater and surface water (both during and after pumping), and the extent and significance, if any, of impacts on local groundwater users. It should include groundwater elevation contour maps for the area in which transfer operations are located, showing pre-transfer groundwater elevations, groundwater elevations at the end of the transfer, and final-recovered groundwater elevations in March 2014.

3.6 Mitigation Program

Groundwater A mitigation plan is needed to ensure that groundwater pumping to support water transfers is very controversial conducted in many Northern California counties a manner that does not injure other legal users of water or unreasonably affect the environment and economy of the county from which water is being transferred. Groundwater substitution transfer proponents need to mitigate any local impacts caused by their groundwater substitution transfers transfer operations. A mitigation plan must be included in the water transfer proposal.

3.6.1 Objectives

The seller water transfer proponent must implement an effective mitigation program to investigate evaluate and correct problems that could arise due to transfer-related groundwater pumping. A number of potential Potentially significant impacts are sufficiently serious that they identified in a water transfer proposals must be avoided or mitigated for a project proposed water transfer to continue, including:

- Contribution to long-term conditions of overdraft.
- Dewatering or substantially reducing water levels in non-participating wells.
- Land subsidence.
- Degradation of groundwater quality that substantially impairs beneficial uses or violates water quality standards.
- Affecting the hydrologic regime of wetlands or streams to the extent that ecological integrity health is impaired.

The seller water transfer proponent will design and implement a monitoring and mitigation plan and will be responsible for mitigating any significant third-party and environmental impacts that occur. Mitigation actions could include:

- Curtailment of pumping until natural recharge corrects the issue.
- Lowering of pump bowls in third-party wells affected by transfer pumping.
- Reimbursement for significant increases in pumping costs due to the additional groundwater pumping to support the transfer.
- Other actions as appropriate.

3.6.2 Mitigation Plan Elements

To ensure that mitigation programs will be tailored to local conditions, the mitigation plan must include the following elements.

1. A procedure for the [sellerwater transfer proponent](#) to receive reports of purported environmental or third-party effects.
2. A procedure and schedule for investigating any reported effect.
3. A procedure for developing mitigation options for legitimate effects and schedule for implementing those options in cooperation with the affected third parties, including a strategy for conflict resolution.
4. Assurances that adequate financial resources are available to cover reasonably anticipated mitigation needs.

[SellersWater transfer proponents](#) will submit a mitigation plan to the Project Agencies at least two months prior to the start of the groundwater substitution transfer.

If an effect is [identifiedreported](#), the description of the effect and the [sellers'water transfer proponents'](#) proposed response will be submitted to the Project Agencies and, as required, to local agencies [within five business days](#).

Mitigation measures will be funded by the transfer proponents, unless an agreement is made otherwise. [Selling agenciesWater transfer proponents](#) will provide assurance that adequate financial resources are available to accomplish any required mitigation.

Section 4. Reservoir Storage Release

Water is made available for transfer by reservoir release when the project operators release water in excess of what would be released annually under normal operations. The water must also be released at a time when it can be captured and/or diverted downstream. Each storage facility is unique, and, therefore, each reservoir storage release (or reservoir ~~re-operation~~reoperation) proposal must be evaluated on a case-by-case basis. Sufficient information must be provided to establish normal operating conditions and normal end-of-season storage as well as typical release patterns. Definitively establishing the without-~~project-transfer proposal~~ conditions for a reservoir reoperation is difficult because normal conditions can vary substantially, depending on things such as annual hydrology, agency demand, and instream requirements. Sufficient information must be provided to ensure the water transfer ~~projectproposal~~ is providing additional storage withdrawal. Data spanning a variety of hydrologic conditions is necessary to develop without transfer ~~proposal~~ or “normal” operating conditions.

At a minimum, the following information is needed to evaluate the without-transfer operating conditions:

- ~~Minimum~~A minimum of five years’ reservoir operating data, including end-of-month storage.
- End-of-season reservoir storage.
- Historic and forecast inflows with monthly updates.
- Historic and forecast water demands with monthly updates.
- Historic reservoir releases.
- Instream requirements.
- Flood control diagram.
- End-of-season target carryover storage, if any.

In addition to the information necessary to establish the without-transfer conditions, information will be required during the transfer period to verify delivery of the transfer water. Such information would include independent gage information downstream of the reservoir as well as reservoir release and storage data.

4.1 Refill Criteria

Refill of the reservoir storage space vacated by the water transfer can affect downstream water users if it is done at a time when downstream legal users could have utilized reservoir releases. Refill criteria are required for all reservoir release water transfers to ~~assure~~ensure that the transfer does not injure other legal users of water. The refill period can span a number of years if the hydrology in subsequent years is insufficient to allow refill. In general, the refill of vacated space from a water

transfer will be restricted to periods when the refill quantity is in excess of the needs of any legal user of water downstream of the point of diversion. For example, if a transfer of reservoir storage originates above another reservoir, refill will not be considered to occur until the downstream reservoir goes into flood control operations. Alternately, if a transfer source directly affects the inflows to the Delta, refill will not be considered to occur until [the Delta](#) is declared to be in excess conditions as defined in the [Coordinated Operations Agreement COA](#) between Reclamation and DWR. Each transfer [proposal](#) is unique; thus, refill criteria must be developed for each [project individually proposal](#) and must be tailored to these unique circumstances. [The refill criteria are typically developed in coordination with the SWP and CVP operations staff.](#)

Appendix A. Potential Water Transfer Effects on the Projects

Apart from the interest of the Project Agencies in promoting responsible water transfers, they have another important interest in transfers ~~as well~~; one ~~which~~that underlies much of what this ~~Technical memorandum~~technical document is about. Transfers through the Delta or affecting Delta water supply in the summer and fall have the inherent potential to adversely affect the SWP and the CVP: physically and from a water accounting perspective. If water that is transferred by others is not new water to the system, it will necessarily come instead out of Project supply. As described more generally below, that is impermissible “legal injury.”

The Projects together have the shared responsibility for meeting Delta water quality requirements and are junior to all lawful in-basin water diversions of natural flow under the watershed protection statutes. Because the Projects only export natural flow after all in-basin uses have been met, and must operate to meet Delta flow-related standards, transfers that do not provide new water to the system (or insufficient new water) will require the SWP and CVP to release water from storage or curtail diversions in order to maintain regulatory compliance. This is why the Projects must be assured that the water made available for transfer is new water that would not be in the system but for the transfer activity.

When the Projects contract to convey transferred water through their facilities, or otherwise weigh in on proposed transfers, they must be sure that the water supply to which their Project contractors are legally entitled is not unlawfully diminished by the transfer. If it is diminished, it is effectively an involuntary and uncompensated transfer of someone else’s water and constitutes legal injury.

~~Rice Cropland Idling Program Conservation Measures from the Giant Garter Snake 2010/2011 Reclamation Water Transfer Program Biological Opinion~~ Appendix B. Well Acceptance Criteria

~~Conservation Measures.~~ The following actions to reduce the potential of impact to the giant garter snake will be incorporated into transfer actions. As part of the approval process, Reclamation will have access to the land to verify how the water transfer is being made available and to verify that the actions to protect the giant garter snake are being implemented.

In its February 2010 Final Environmental Assessment, Reclamation has made the following commitments to avoid effects on giant garter snake.

- ~~• The block size of idled parcels will be limited to 320 acres in size with no more than 20 percent of rice fields idled cumulatively (from all sources of fallowing) in each county. The 320-acre blocks will not be located on opposite sides of a canal or other waterway, and will not be immediately adjacent⁹ to another fallowed parcel (a checkerboard pattern is the preferred layout). Having the fallowed/idled rice acreage spread throughout the Sacramento Valley is Reclamation's effort to assure that the total water conveyance system remains in its normal year-wetted-up condition.~~
- ~~• Reclamation will provide a map(s) to the Service in June of each year showing the parcels of rice land that are fallowed for the purpose of transferring water during 2010 and 2011. These maps will be prepared to comport to Reclamation's GIS [geographic information system] standards.~~
- ~~• Parcels participating in cropland idling will not include lands in the Natomas Basin.~~
- ~~• Sellers will continue to voluntarily perform giant garter snake best management practices (BMPs), including educating all district personnel to recognize and avoid contact with giant garter snake, clean only one side of a conveyance channel per year, provide rock basking habitat in the system's water prisms, and raise flail mower blades to at least 6 inches above the canal operation and maintenance road surfaces.~~

⁹ An ecological judgment of reasonably close proximity may be necessary to determine if a parcel is adjacent to another parcel. Parcels separated by a man-made dike or barrier, natural river berm, and the like will be considered adjacent. With this in mind, individual crop idling/substitution proposals will have to be evaluated on a case-by-case basis.

- ~~The water seller will maintain a depth of at least two feet of water in the major irrigation and drainage canals to provide movement corridors.~~
- ~~A field proposed for a cropland idling transfer cannot be fallow more than two irrigation seasons in a row.~~
- ~~As part of a Giant Garter Snake Baseline Monitoring and Research Strategy (Monitoring Strategy) for the development of a Giant Garter Snake Conservation Strategy, in addition to the measures described above, Project Agencies are proposing research goals to help quantify and evaluate the response of the giant garter snake to rice land idling. The focus of the Monitoring Strategy will be in the Colusa, Butte, Sutter, and Yolo Basins.~~
- ~~To minimize the socioeconomic effects on local areas and to minimize effects on special status species, Reclamation will not approve water transfers via cropland idling if more than 20 percent of recent harvested crop acreage in the county for each eligible crop, including rice, would be idled.~~

Appendix C. Well Acceptance Criteria

Table CB-1 Well acceptance criteria

Well location ¹	Criteria for acceptance
Between one and two miles away from of a major surface water tributary to the Delta or a delineated wetland	Well(s) may be accepted if: Sufficient information is submitted to demonstrate that the well is not connected to the surface water system tributary to the Delta, or The well perforations are deeper than 50 feet below ground surface (bgs) and sufficient information demonstrates that the well is not connected to the surface water system tributary to the Delta. They do not pose a risk of adversely affecting groundwater quality.
Within one mile of a major surface water tributary to the Delta or a delineated wetland	Well(s) may be accepted if: The uppermost perforation start below 150 feet bgs; or The uppermost perforations start between 100 and 150 feet bgs and the well has a surface annular seal to at least 20 feet; a total of at least 50 percent fine-grained materials in the interval above 100 feet bgs; and at least one fine-grained layer that exceeds 40 feet in thickness in the interval above 100 feet bgs; or Sufficient information is submitted to demonstrate that the well is not connected to the surface water system tributary to the Delta.
Between one-half and one mile away from a minor surface water tributary to the Delta or a delineated wetland	Well(s) may be accepted if: Sufficient information is submitted to demonstrate that the well is not connected to the surface water system tributary to the Delta, or The well perforations are deeper than 50 feet bgs and sufficient information demonstrates that the well is not connected to the surface water system tributary to the Delta. They do not pose a risk of adversely affecting groundwater quality.
Within one-half mile of a minor surface water tributary to the Delta or a delineated wetland	Well(s) may be accepted if: The uppermost perforations start below 150 feet bgs; or The uppermost perforations start between 100 and 150 feet bgs and the wells has a surface annular seal to at least 20 feet; a total of at least 50 percent fine-grained materials in the interval above 100 feet bgs; and at least one fine-grained layer that exceeds 40 feet in thickness in the interval above 100 feet bgs; or Sufficient information is submitted to demonstrate that the well is not connected to the surface water system tributary to the Delta; or Sufficient information is submitted to demonstrate that the surface water feature does not flow during times when the Delta is in balanced conditions.

Major surface water features tributary to the Delta affected by groundwater pumping are: Sacramento River, Feather River, Big Chico Creek, Cottonwood Creek, Stony Creek, Yuba River, including the Yuba Gold Fields, American River and the Cosumnes River. **Minor** surface water features tributary to the Delta potentially affected by groundwater pumping are: Colusa Basin Drain, Tule/Toe Canal, and Natomas Cross Canal.

<u>Well location</u>	<u>Criteria for acceptance</u>
Between one and two miles from a major ¹ <u>surface water tributary to the Delta or a delineated wetland</u>	<p><u>Note: In addition to the well acceptance criteria documented below, wells may be considered ineligible for transfer pumping based on the requirements documented in Section 3.3.</u></p> <p>Well(s) may be accepted if:</p> <ul style="list-style-type: none"> • <u>Sufficient information is submitted to demonstrate that the well likely does not have a significant hydraulic connection to the surface water system tributary to the Delta, or</u> • <u>The well's uppermost perforations start deeper than 50 feet below ground surface (bgs), or</u>

	<ul style="list-style-type: none"> • The well does not pose a risk of adversely affecting groundwater quality.
Within one mile of a major surface water tributary to the Delta or a delineated wetland	<p>Well(s) may be accepted if:</p> <ul style="list-style-type: none"> • The uppermost perforation starts below 150 feet bgs; or • The uppermost perforations start between 100 and 150 feet bgs and the well has a surface annular seal to at least 20 feet bgs, a total of at least 50 percent fine-grained materials in the interval above 100 feet bgs, and at least one fine-grained layer that exceeds 40 feet in thickness in the interval above 100 feet bgs; or • Sufficient information is submitted to demonstrate that the well likely does not have a significant hydraulic connection to the surface water system tributary to the Delta.
Between one-half and one mile away from a minor² surface water tributary to the Delta or a delineated wetland	<p>Well(s) may be accepted if:</p> <ul style="list-style-type: none"> • Sufficient information is submitted to demonstrate that the well likely does not have a significant hydraulic connection to the surface water system tributary to the Delta, or • The well's uppermost perforations start deeper than 50 feet bgs, or • The well does not pose a risk of adversely affecting groundwater quality.
Within one-half mile of a minor surface water tributary to the Delta or a delineated wetland	<p>Well(s) may be accepted if:</p> <ul style="list-style-type: none"> • The top of the uppermost perforations start below 150 feet bgs; or • The uppermost perforations start between 100 and 150 feet bgs and the wells has a surface annular seal to at least 20 feet bgs, a total of at least 50 percent fine-grained materials in the interval above 100 feet bgs, and at least one fine-grained layer that exceeds 40 feet in thickness in the interval above 100 feet bgs; or • Sufficient information is submitted to demonstrate that the well likely does not have a significant hydraulic connection to the surface water system tributary to the Delta; or • Sufficient information is submitted to demonstrate that the surface water feature does not flow during times when the Delta is in balanced conditions.

¹ [Major](#) surface water features tributary to the Delta affected by groundwater pumping are: Sacramento River, Feather River, Big Chico Creek, Cottonwood Creek, Stony Creek, Yuba River (including the Yuba Gold Fields), American River, and Cosumnes River.

² [Minor](#) surface water features tributary to the Delta potentially affected by groundwater pumping are: Colusa Basin Drain, Tule/Toe Canal, and Natomas Cross Canal.