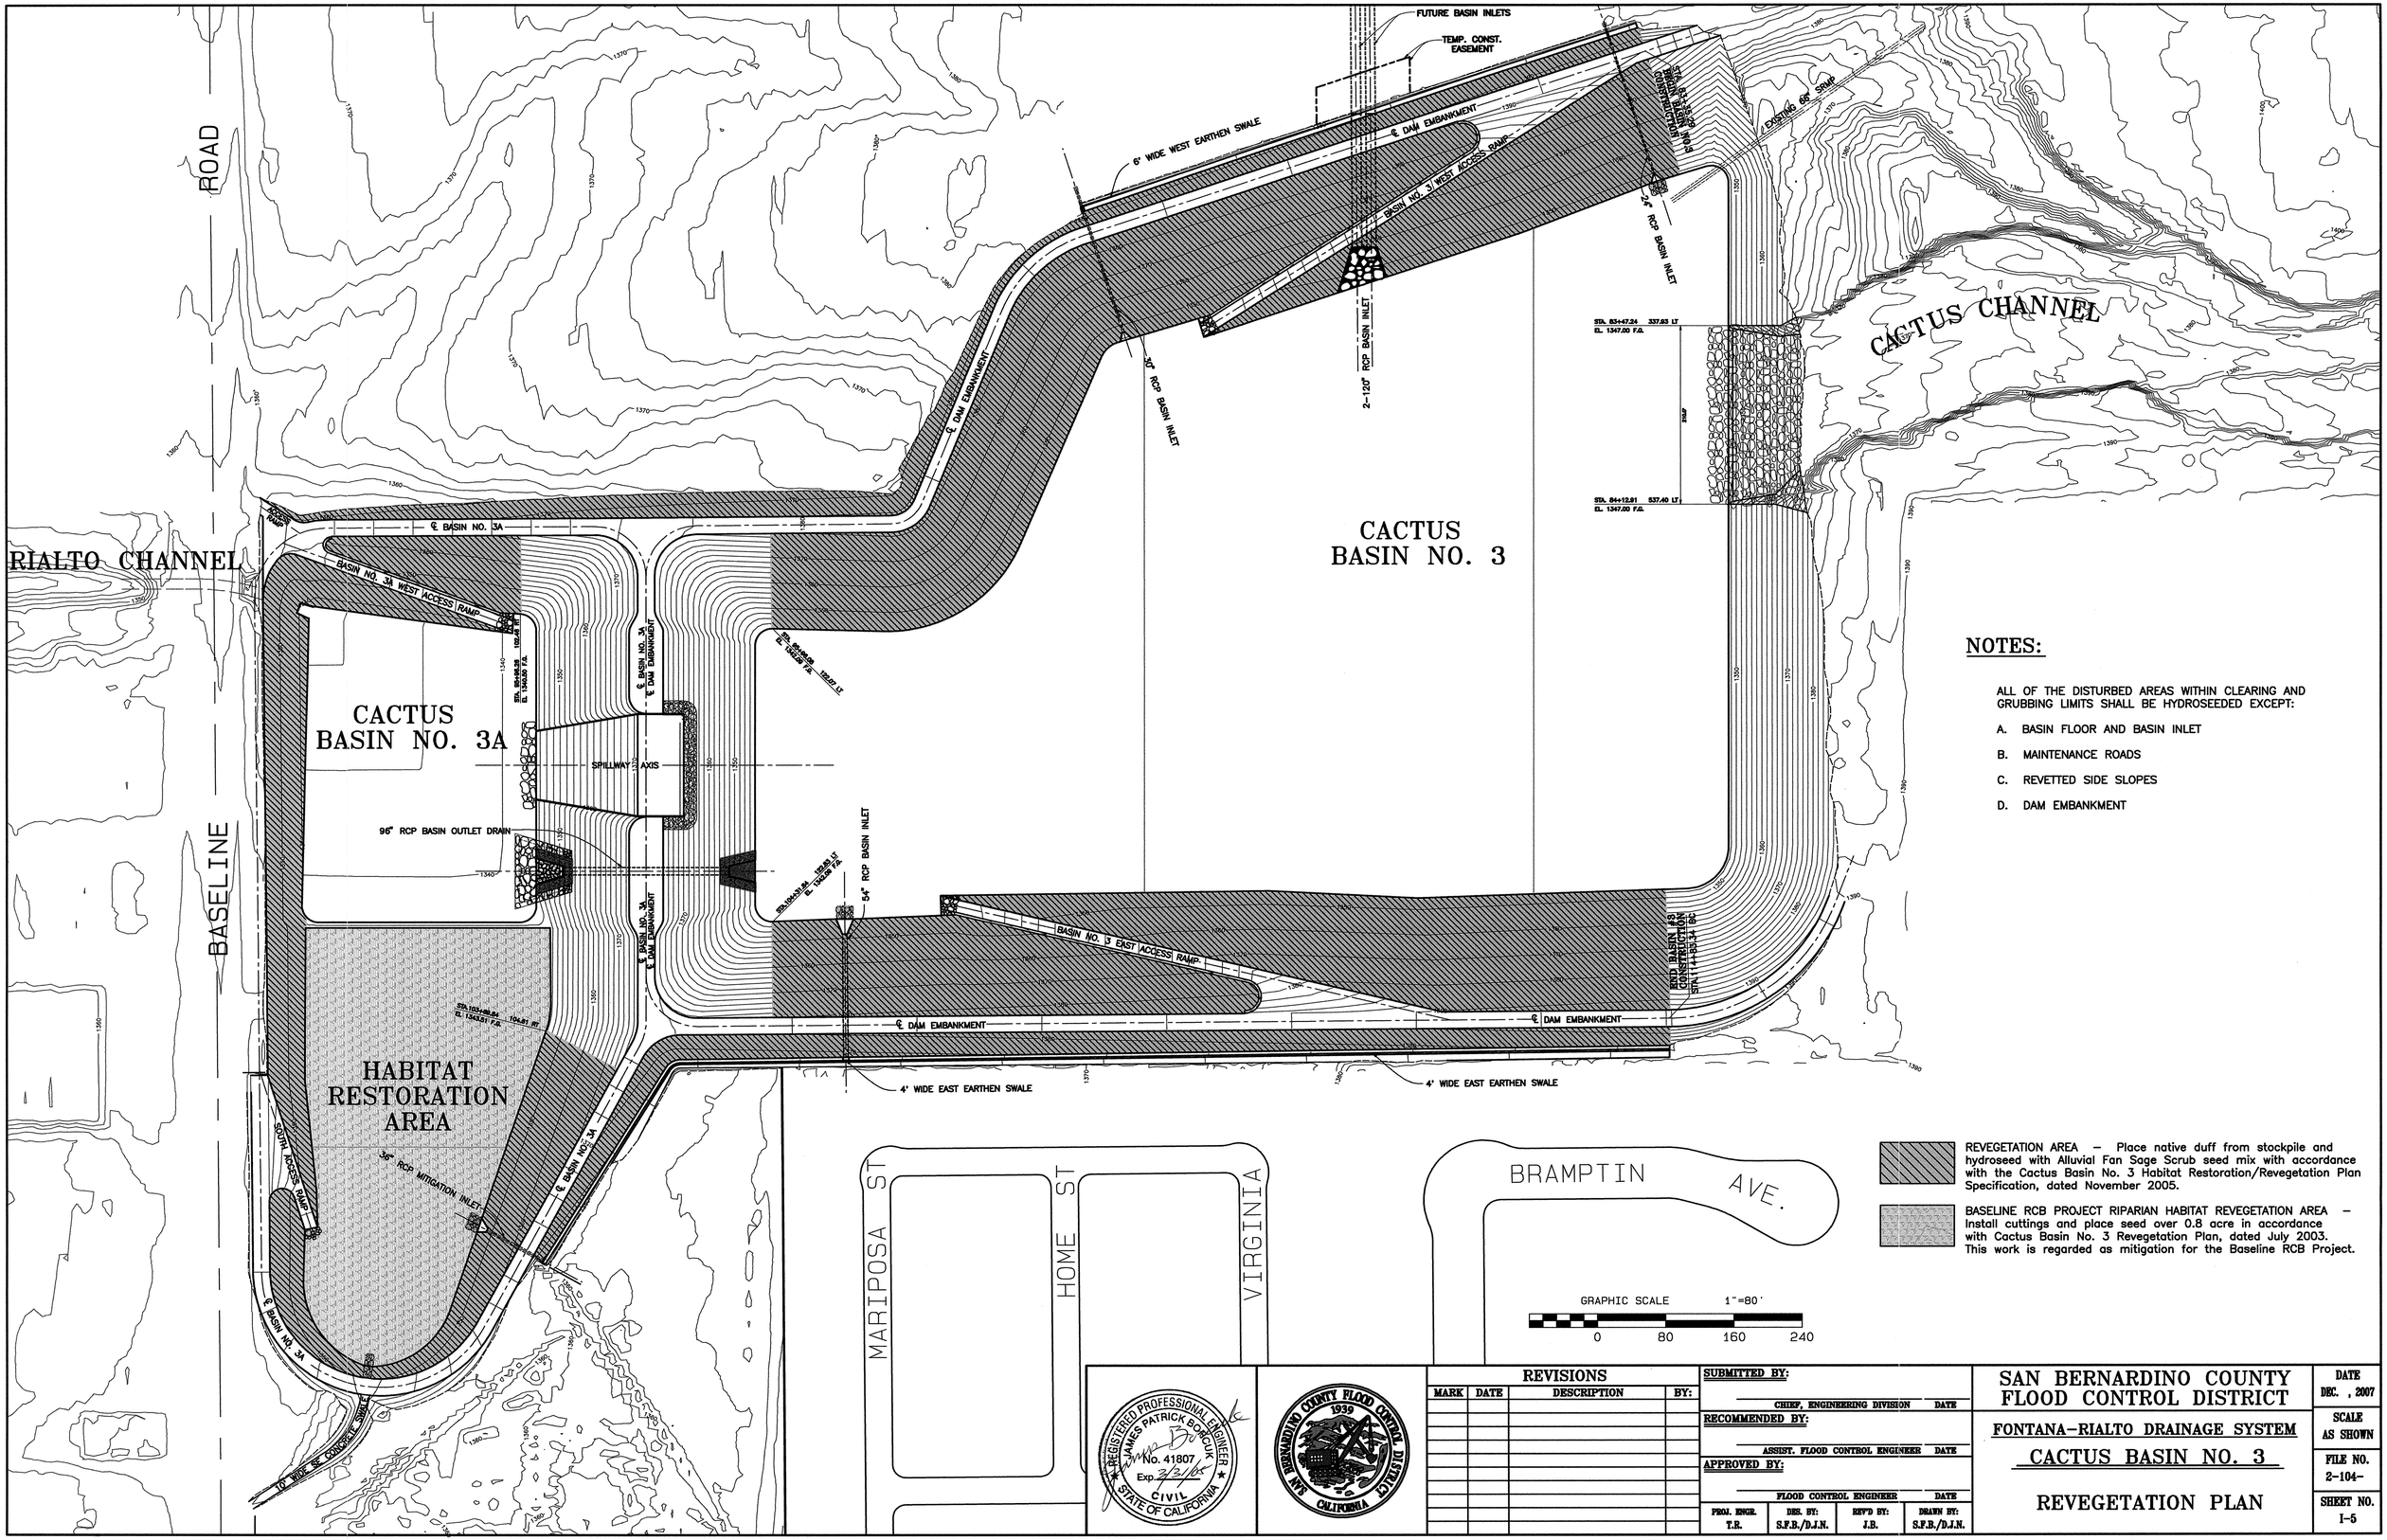

NOTES:

ALL OF THE DISTURBED AREAS WITHIN CLEARING AND GRUBBING LIMITS SHALL BE HYDROSEEDED EXCEPT:

A. BASIN FLOOR AND BASIN INLET

B. MAINTENANCE ROADS

C. REVETTED SIDE SLOPES

D. DAM EMBANKMENT

REVEGETATION AREA – Place native duff from stockpile and hydroseed with Alluvial Fan Sage Scrub seed mix with accordance with the Cactus Basin No. 3 Habitat Restoration/Revegetation Plan Specification, dated November 2005.

BASELINE RCB PROJECT RIPARIAN HABITAT REVEGETATION AREA – Install cuttings and place seed over 0.8 acre in accordance with Cactus Basin No. 3 Revegetation Plan, dated July 2003. This work is regarded as mitigation for the Baseline RCB Project.

REGISTERED PROFESSIONAL ENGINEER JAMES PATRICK BOBCUK No. 41807 Exp. 3/31/08 CIVIL STATE OF CALIFORNIA

SAN BERNARDINO COUNTY FLOOD CONTROL DISTRICT 1939 CALIFORNIA

REVISIONS			
MARK	DATE	DESCRIPTION	BY:

SUBMITTED BY:

CHIEF, ENGINEERING DIVISION DATE

RECOMMENDED BY:

ASSIST. FLOOD CONTROL ENGINEER DATE

APPROVED BY:

FLOOD CONTROL ENGINEER DATE

PROJ. ENGR.	DES. BY:	REV'D BY:	DRAWN BY:
T.R.	S.F.B./D.J.N.	J.B.	S.F.B./D.J.N.

SAN BERNARDINO COUNTY FLOOD CONTROL DISTRICT

FONTANA–RIALTO DRAINAGE SYSTEM

CACTUS BASIN NO. 3

REVEGETATION PLAN

DATE
DEC. , 2007
SCALE AS SHOWN
FILE NO. 2-104-
SHEET NO. I-5